SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter.]

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. LII.—No. 10. [NEW SERIES.] NEW YORK, MARCH 7, 1885. [$3.20 per Annum. [POSTAGE PREPAID.]

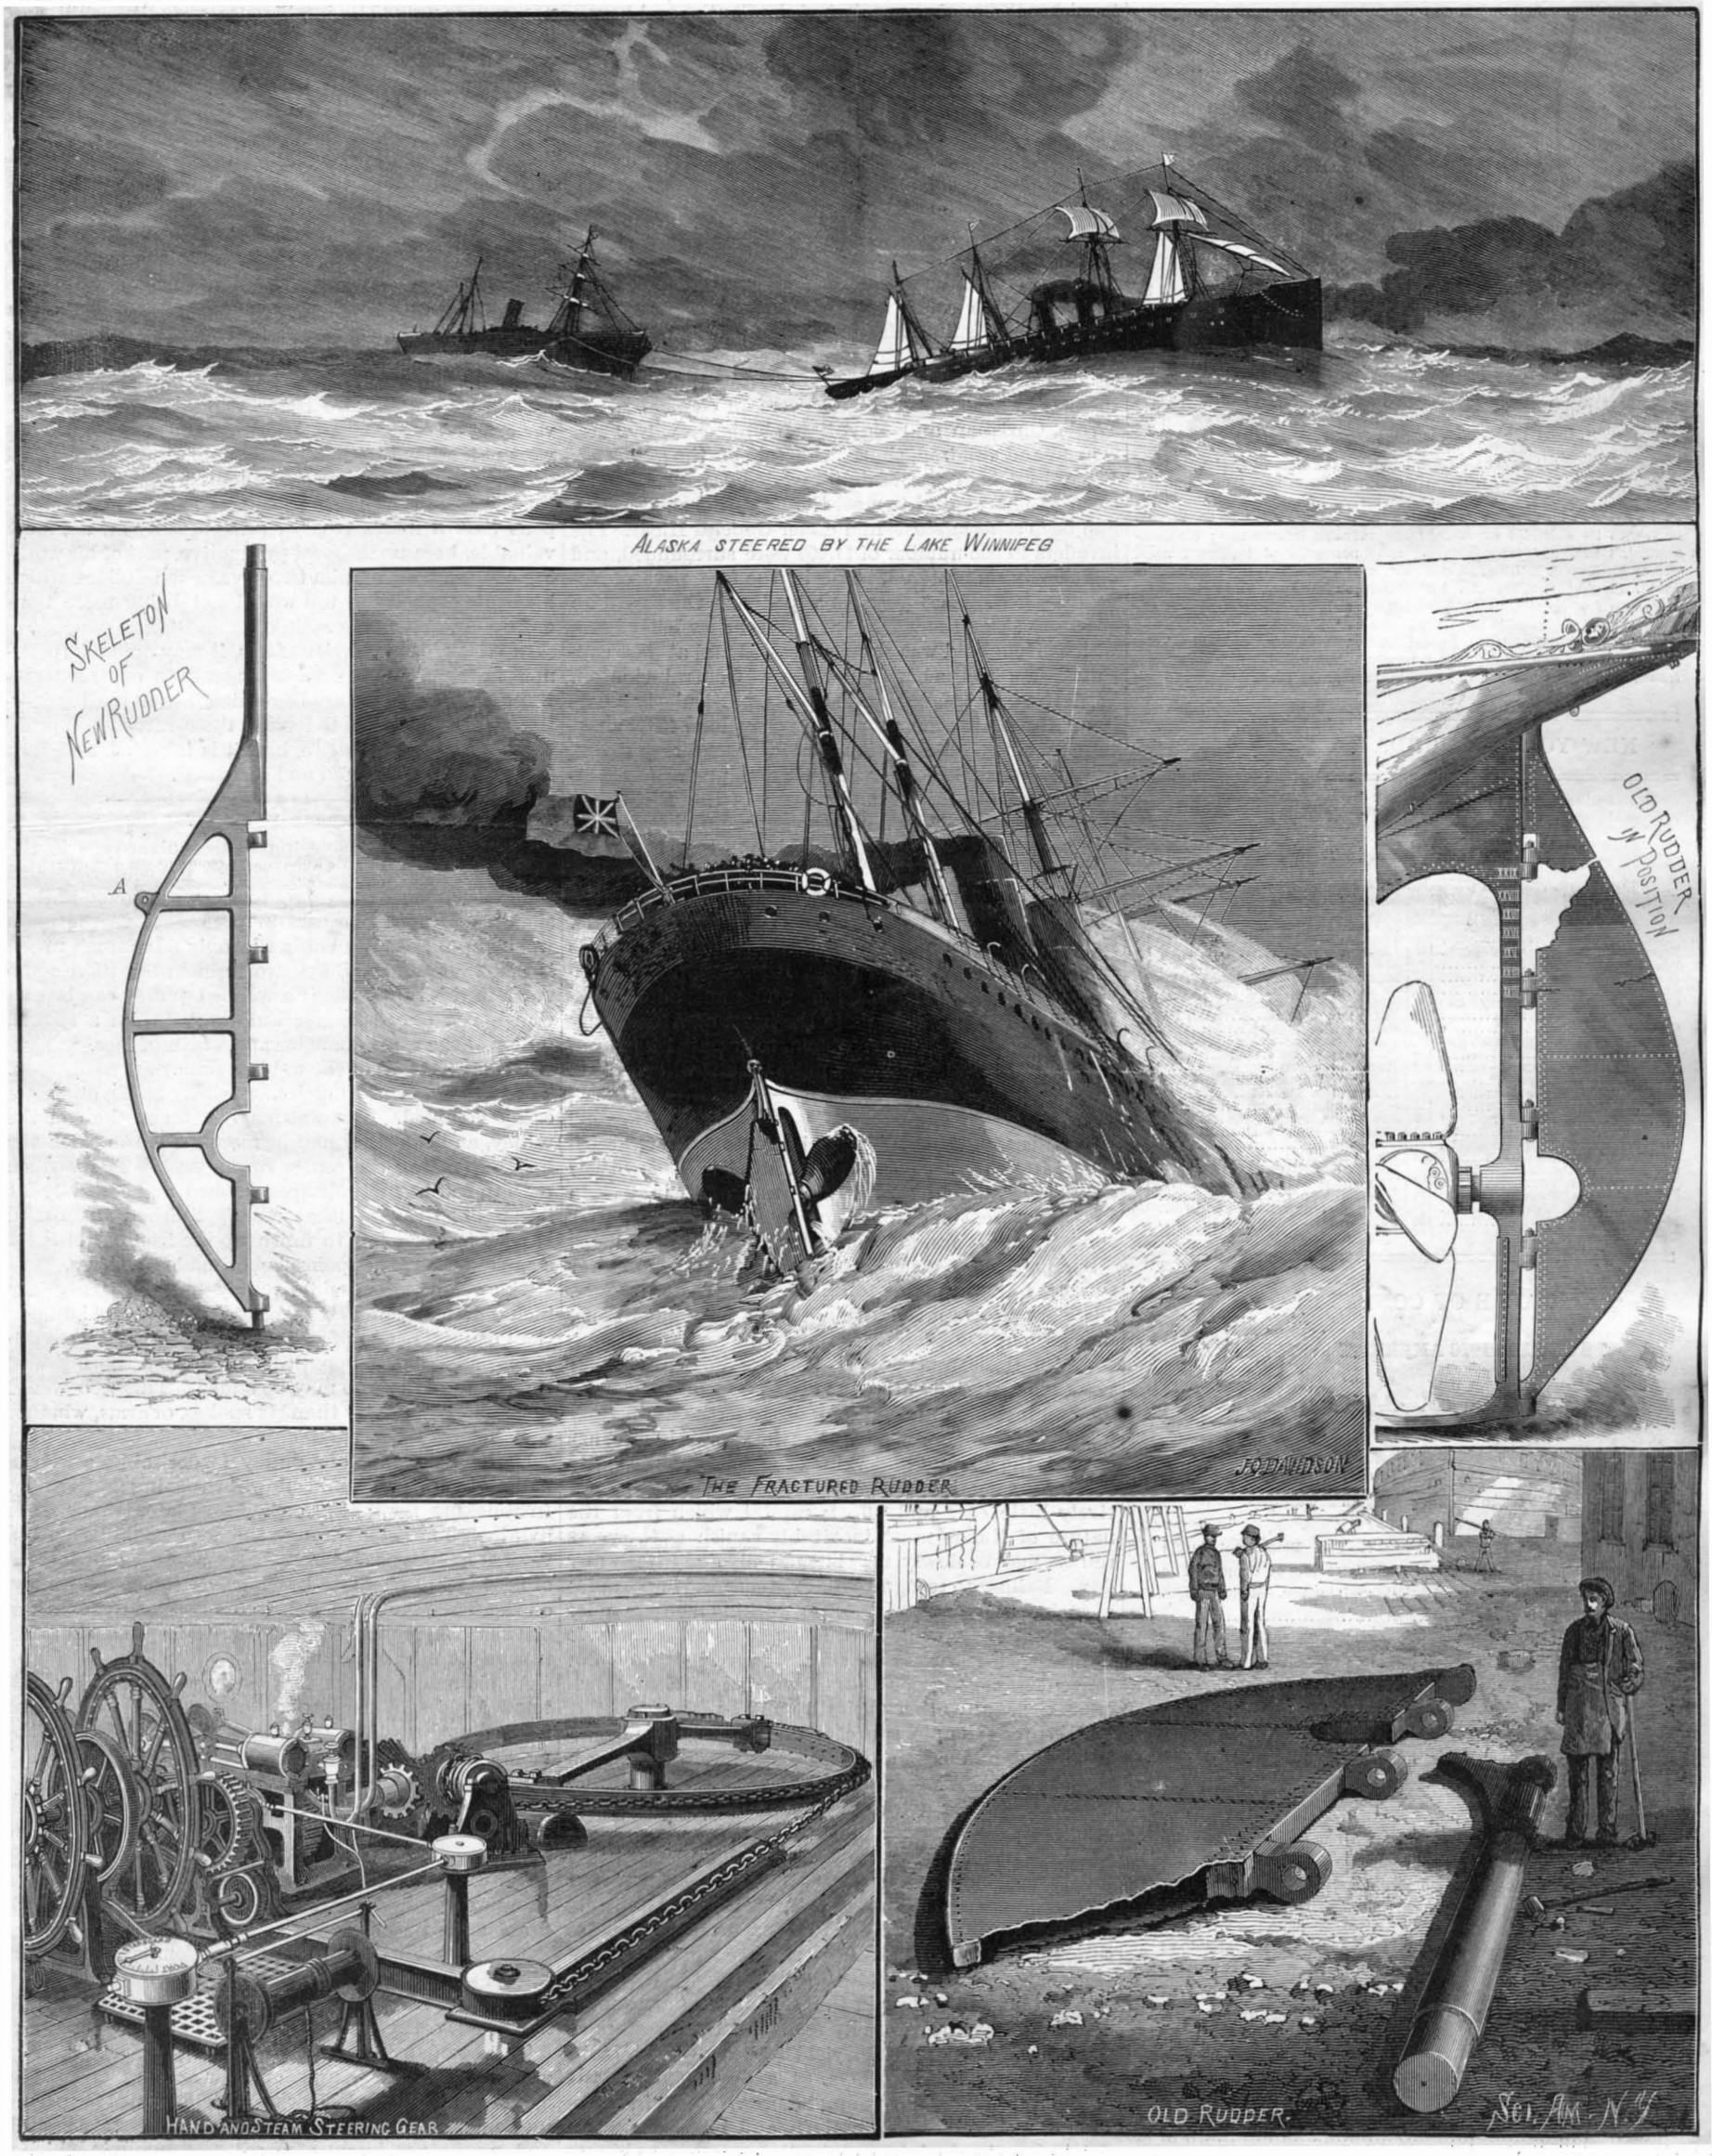

THE STEERING GEAR AND BROKEN RUDDER OF THE STEAMSHIP ALASKA.—[See page 148.]

© 1885 SCIENTIFIC AMERICAN, INC

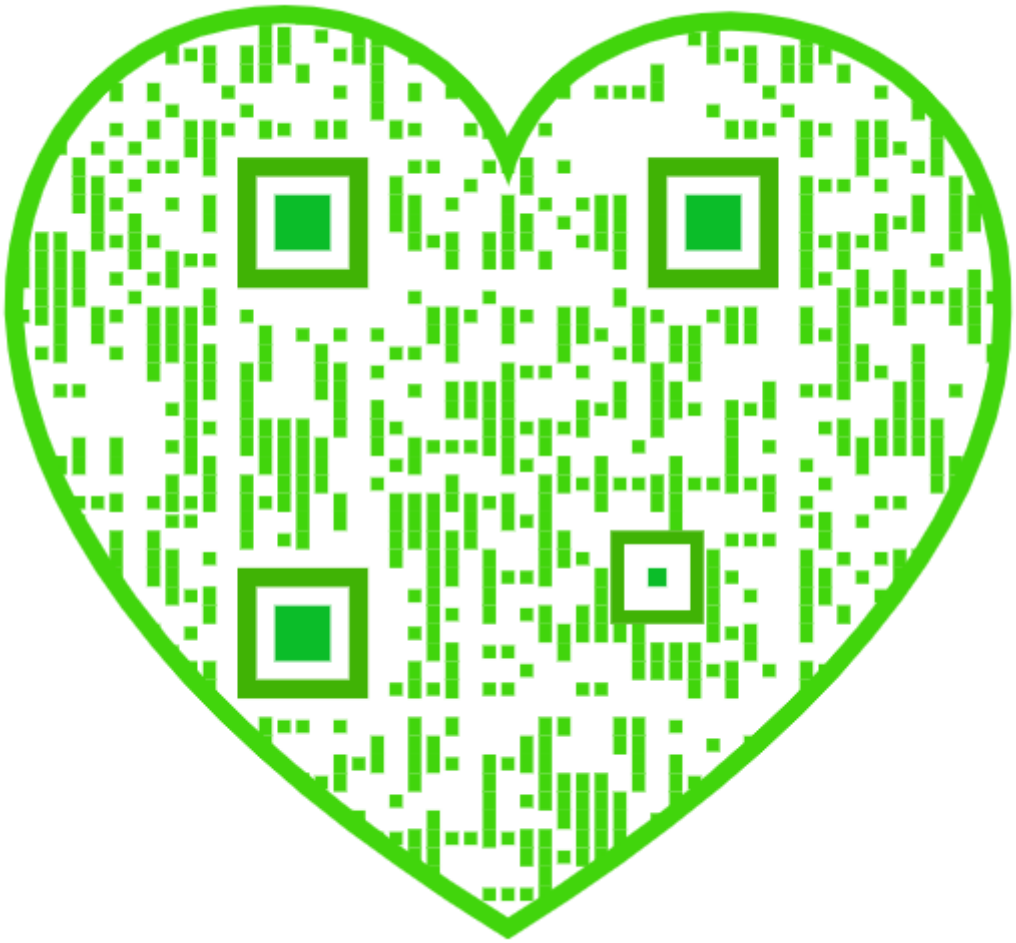

Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT

No. 361 BROADWAY, NEW YORK.

O. D. MUNN. A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year, postage included.....$3 20
One copy, six months, postage included..... 1 60

Clubs.—One extra copy of THE SCIENTIFIC AMERICAN will be supplied gratis for every club of five subscribers at $3.20 each; additional copies at same proportionate rate. Postage prepaid.

Remit by postal order. Address

MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

The Scientific American Supplement

is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, $5.00 a year, postage paid, to subscribers. Single copies, 10 cents. Sold by all newsdealers throughout the country.

Combined Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, postage free, on receipt of *seven dollars*. Both papers to one address or different addresses as desired.

The safest way to remit is by draft, postal order, or registered letter. Address MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

Scientific American Export Edition.

The SCIENTIFIC AMERICAN Export Edition is a large and splendid periodical, issued once a month. Each number contains about one hundred large quarto pages, profusely illustrated, embracing: (1.) Most of the plates and pages of the four preceding weekly issues of the SCIENTIFIC AMERICAN, with its splendid engravings and valuable information; (2.) Commercial, trade, and manufacturing announcements of leading houses. Terms for Export Edition, $5.00 a year, sent prepaid to any part of the world. Single copies, 50 cents. ☞ Manufacturers and others who desire to secure foreign trade may have large and handsomely displayed announcements published in this edition at a very moderate cost.

The SCIENTIFIC AMERICAN Export Edition has a large guaranteed circulation in all commercial places throughout the world. Address MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

NEW YORK, SATURDAY, MARCH 7, 1885.

Contents.

(Illustrated articles are marked with an asterisk.)

Æchmeas at home*..... 151
Boiler, a, how to fill..... 148
Bridge builders, American, a chance for..... 151
Bridge over the River Dnieper*.. 147
Buggy tops, support for*..... 146
Business and personal..... 153
Capital, mechanic's, the..... 144
Changes a half century has wrought..... 147
Cutose..... 148
Diphtheria, specific germ of, discovery of the..... 152
Earthquakes, some causes of..... 152
Electric machine, a great*..... 150
Electric machine, the Wimshurst seven foot duplex*..... 150
Electric experiment, interesting* 150
Electricity, the nature of..... 149
Engineer's story of a brakeman.. 146
Forces, equilibrium of..... 152
Garbage burning in New York, proposed..... 152
How water may flash into ice.... 149
Inventions, agricultural..... 153
Inventions, engineering..... 153
Inventions, index of..... 155
Inventions, miscellaneous..... 153
Lamps, extinguisher for*..... 148
Life insurance company, a thrifty 144
Light, a new..... 145
Mahdi, El..... 144
Monument, Washington's, completion of..... 145
New books and publications..... 153
Notes and queries.....153, 154, 155
Pan, frying, Bock's*..... 146
Power for wood-working tools... 149
Pulleys, webbed..... 145
Rags, disinfecting by steam 149
Rudder of a great steamship, 143*, 148
Rudder, the Alaska's..... 145
Saw, band, the..... 149
Shaft tugs, improved*..... 146
Shall we sleep with open windows?..... 146
Size, a new..... 152
Steel, cast, Whitworth compressed..... 145
Steel nails *vs.* iron nails..... 147
Stove implement, Welshan's*.... 146
Subscribers, new, notice to..... 145

TABLE OF CONTENTS OF

THE SCIENTIFIC AMERICAN SUPPLEMENT,

No. 479,

For the Week Ending March 7, 1885.

Price 10 cents. For sale by all newsdealers.

PAGE

I. CHEMISTRY AND METALLURGY.—The Electrometallurgic Treatment of Copper Matte for the Extraction of Copper.—The anodes and cathodes.—The circulation.—Dynamos.—Mode of operating.—9 figures..... 7646

Separation and Determination of Potash in Commercial Fertilizers.—Methods adopted by the Association of Official Agricultural Chemists..... 7647

Researches on Liquefied Gases.—By Prof. JAS. DEWAR.—1 figure..... 7648

II. ENGINEERING, ETC.—The Tehuantepec Ship Railway and Other Great Works of Capt. Jas. B. Eads.—With 1 full page engraving, 10 smaller engravings, and map..... 7640

Balancing the Reciprocating Parts of Steam Engines..... 7645

Completion of Washington's Monument.—Dedication of same.—With full description of the monument and 3 figures..... 7650

III. TECHNOLOGY.—On Japanese Tea and Tobacco.—By J. TAKAYAMA.—Gathering, sorting, and drying tea leaves.—Preparation of black tea.—Analyses of teas.—Collection and drying of tobacco leaves.—Analysis of same..... 7648

On the Drying of Wood.—With engraving of wood drying stove, 7649

IV. MEDICINE, ETC.—Management of Measles, Whooping Cough, and Diphtheria.—By Dr. GEORGE B. FOWLER..... 7649

V. MISCELLANEOUS.—The Great Earthquake in Spain.—7 views of the ruins..... 7652

The Buddhist Theory of Evolution..... 7653

Care of Street Car Horses.—Stables, food, grooming, shoeing, etc., 7653

EL MAHDI.

The man who now confronts the British in the Soudan was made a Khouan, or brother preacher, of the order of Sid Abd-el-Kader about twenty years ago; five years ago he was elected by the council of the order to take command of the army in the South. He was thereupon proclaimed *Mahdime* (sublime), the "arm of the Almighty," and invested with absolute authority over the faithful, whom he promptly invited to join his forces under penalty of death. His name is Mohammed Ahmed. He was born in Dongola, Nubia, about 1840, and was educated at a religious school near Khartoum.

El Mahdi proclaimed his call to fulfill the prophecy touching the coming prophet of the South, and began to organize an army in 1881. The Governor-General of Khartoum commanded him to disavow his pretensions, and sent a small force against him to enforce the command. These the Mahdi soon defeated and dispersed. A second detachment met the same fate; then a column under Reschid Bey was destroyed to the last man. The following January he intercepted an Egyptian corps, on the way to Khartoum, and killed them all; in June, he annihilated another; and still another (under Yousef Pacha) in July. In every case the captured soldiers of the Khedive were given to the spears; native soldiers were absorbed into his own army, when it suited his purpose.

The next year El Mahdi overcame the Egyptian garrisons at El Obeid, the capital of Kordofan, and killed them all, with the European officers in command. As a rule, Christian and Egyptian civilians, with their women and children, shared the fate of the garrisons. From El Obeid the Mahdi invaded Darfur, but returned to his capital to meet the Egyptian army which had been sent against him under General Hicks. The invaders to the number of 11,000 were surrounded, and mercilessly slaughtered. This in the fore part of November, 1883. Last year he wiped out the Egyptian garrisons along the Nile, above and below Khartoum, which stronghold was closely invested and at last captured, despite the heroic defense of General Gordon. With the fall of these fortified posts, particularly Khartoum, the Mahdi has come into possession of steamers, cannon, rifles, ammunition, and other military stores, in quantity sufficient for a severe and protracted campaign; and the failure and retreat of the British relief expeditions—if nothing worse than failure befalls them—completes the record of his military successes, and necessarily adds enormously to his prestige as prophet and warrior.

What the issue will be, time only can determine. False prophet or true prophet, El Mahdi commands the situation; and unless Great Britain is prepared to absorb Egypt and the Soudan, and undertake to establish an Ethiopian India in the heart of Africa, any attempt to punish him in Nubia or to dispute his pretensions in the Soudan will cost more than it will come to.

THE MECHANIC'S CAPITAL.

At this season of the year business men are accustomed to "take account of stock," that is, review their assets in detail and sum up the value of their stock in trade, to discover exactly how they stand, and what courses may be best for their future success in business.

Such is not the general custom of men depending for support solely or mainly on their power to earn wages. They are more apt to let things go as they have gone, unconsciously assuming that they have no assets, no stock in trade, and that it does not lie within their power to materially alter the conditions of their daily life and income, unless, it may be, to strike when their mates do for higher wages. Yet the poorest laborer has capital, the amount and value of which he can usually increase, sometimes greatly increase, with comparatively little care and effort; capital which from the nature of things must inevitably vanish as the years roll on, may be slowly, may be suddenly and utterly any day. Failing to recognize the existence and importance of such working capital, too may working men squander it thoughtlessly, while more allow it to waste away to nothing, with scarcely an effort to arrest, or lessen, or prevent its wastage or destruction, and without much effort to acquire other capital to fill its place.

Take, for example, the case of a young man beginning life as a laborer, and able to earn no more than a dollar a day. What capital has he to take account of?

Of visible stock in trade he may seem to have nothing, not even a shovel to dig with. Nevertheless, he has an actual capital equivalent, if rightly used, to a safe investment of from $5,000 to $10,000—capital that he may increase or diminish, throw away or multiply indefinitely, just as he chooses, just as readily and as surely as the average business man can squander or increase an equal sum invested in trade.

Ten thousand dollars in U. S. 3 per cents (now quoted above par, and accordingly reckoned by investors as desirable as well as safe) yield $300 a year, or, omitting Sundays and holidays, $1 a day. That is the amount earned by our young laborer. It is fair, therefore, to reckon his rude strength, and intelligence sufficient for simple labor, as worth as much to him as $10,000 in government 3 per cent bonds; and it is actually worth more to him than that amount of invested money would be if coupled with inability to earn his living by the use of his hands.

What young laborer, not a fool, would sell his two hands for $10,000? Or would, for that relatively small sum, exchange his vigorous bodily frame for the body of a paralytic?

Youth, health, and a capacity to do are elements of a working capital that many a millionaire would be glad to swap his millions for.

But these are not all the productive elements of a young workman's capital, though they are elements which too many squander without ever estimating their value until they are gone. Wages so small as $1 a day presuppose very little intelligence, very little skill, and no great responsibility. These, for wage-earning purposes, are factors of higher value; and the worker who adds them to his capital will soon find its productive value doubled, tripled, possibly multiplied many fold. And it is always possible for the young worker thus to increase his capital by adding to his knowledge and skill, and still more by proving his fitness for positions of trust and responsibility.

A larger knowledge of mechanics, finer workmanship, the ability to handle new tools, or the acquisition of a new art, which any young mechanic may gain by the improvement of a winter's evenings, may easily add a dollar to his daily wages, and accordingly may be counted as adding another ten thousand to his invested capital.

Since wages measure the worth rather than the severity of one's labors, and nothing adds so much to the worth of labor as intelligence, skill, and trustworthiness, it usually happens that the best paid labor is not the severest or most exhausting. Indeed, it often happens that a man's trusty character is by far the most valuable, because the most productive, part of his working capital, earning him two, five or ten dollars, where his brute capacity to toil would not bring more than one dollar.

In view of these obvious facts, it may not be impertinent in us, at this season, to suggest to our readers—those especially who are beginning life as mechanics—that it is a good time to look to their invested capital, to see what it amounts to, how it is invested, and how it can best be protected and increased.

WEBBED PULLEYS.

If there is no positive, particular advantage in the spoked or armed iron pulley over the center webbed pulley, there is no adequate reason why spoked pulleys should continue to be cast in preference to the plain webbed pulleys. Probably the only advantage urged is that the spoked pulleys are lighter; but there is no truth in this supposition; a webbed pulley can be cast that is not only stronger but lighter than a spoked pulley of the same diameter and width of face.

The advantages of the webbed pulley are easily seen. The patterns can be much more easily made, and more easily moulded. The web may be on one-half of the pulley, and the other half be merely the rim, with the half hub fitting the center of the web. The wooden pattern can be built cheaper webbed, and certainly the iron pattern can be more readily finished and fitted. It is no fool of a job to finish up the iron patterns for a spoke pulley, the spokes being made in halves.

The web of a good sized pulley—one of twenty-four inches diameter and six inches face—need not be more than five-sixteenths of an inch thick; perhaps a moulding for additional strength to run around the inside of the rim next the web may be added. This web would be manifestly lighter than six spokes, or arms, whether they be directly radial or curved.

If the balancing of a pulley is desirable, a web of half an inch thick would allow for turning and truing. In chucking for boring on a face plate, two or three half inch bolt holes through the web would be as convenient as the spaces between six spokes; and instead of having intermediate bearings, as the spoke pulley, on the face plate, the web would make a flat continuous bearing, preventing the chattering that is sometimes so inimical to good work.

An old moulder says that with webbed pulley patterns in place of the spoke patterns, there would be much less breakage from unequal shrinking in the mould than now.

A THRIFTY LIFE INSURANCE COMPANY.

The fortieth annual statement of the New York Life Insurance Company, which is published in another column, makes a very favorable showing, notwithstanding the depression of the last year in nearly all branches of business.

The New York Life Insurance Company has a surplus of several millions of dollars, and its officers and trustees are recognized as among our most substantial and trustworthy citizens.

This company issues all classes of policies, including non-forfeiture, non-contestable on account of suicide, Tontine investment policies, etc. Their rates for premiums, under their different classes of policies, are liberal, and we do not know of a safer company in which a person can insure his life than the New York Life.

© 1885 SCIENTIFIC AMERICAN, INC

COMPLETION OF WASHINGTON'S MONUMENT.

This great obelisk, of which the corner stone was laid nearly forty years ago, is at last completed, capped, and dedicated. The ceremony of deliverance to the President of the United States took place on the 21st of February last, and formed a brilliant event in the history of the national capital.

The structure has the distinction of being the highest spire in the world. It is in round numbers 597 feet in altitude above sea level. It is chiefly built of granite, faced with white marble. The shaft is 55 feet 1½ inches square at the base, walls 15 feet thick, and 34 feet 5½ inches square at the top, where the walls are 1½ feet thick. There is a central well 25 feet square. The total weight of the monument is 81,000 tons. In this week's SUPPLEMENT we give an official drawing of the structure, together with the report of Colonel Casey, the engineer in charge of the work, in which further particulars of the dimensions will be found. It is hinted in certain engineering quarters that the foundations of the structure are insufficient, and if not soon attended to, the monument will be likely to fall. The condition of the foundation forms a good subject for examination and discussion, and we trust it will receive attention by all who are qualified to judge of the matter.

THE ALASKA'S RUDDER.

On another page will be found illustrations showing the nature, place, and extent of the injury to the rudder of the steamship Alaska on her last trip to this port, together with description and dimensions of the new rudder lately made in this city.

The accident was a novel and peculiar one, and forcibly exhibits the suddenness with which unforeseen perils sometimes arise at sea.

The Alaska left Queenstown January 25, and experienced heavy weather from the start. The storm was especially severe on the night of Feb. 2, but abated the next morning, when a new danger arose. The ship, then about 80 miles southeast of Sable Island, suddenly refused to obey her helm, and it was found that her rudder was so broken as to be uncontrollable. In the main, as our illustrations will show, the rudder was intact; but from being a help to the ship it had become a source of grave peril, through being dashed from side to side as the ship rose and fell in the heavy sea. The officers of the ship exhausted their ingenuity in the effort to grapple with new problems which the broken rudder so suddenly presented, then proceeded to navigate the ship as well as they could without it. The sea was so heavy that the customary drag would not avail to steer the ship; and steering by means of the sails was but little more successful. It was impossible to keep the ship's head to the heavy seas, which broke over her and buffeted her about in a manner that would have foundered a less seaworthy craft.

After drifting helplessly for thirty-six hours, the Alaska sighted the steamer Lake Winnipeg, of the Beaver Line, which stood by until morning, and then came to the assistance of the disabled vessel. In the morning (Feb. 5) it was decided to use the Lake Winnipeg as a drag with which to steer the Alaska, and hawsers were passed from the one to the other as for ordinary towing. By deflecting the cables by means of the dragging steamer as described elsewhere, the same effect was produced as is obtained by shifting the helm. One of the cables parted during the next night, compelling the vessel to lie to until morning; but with this exception the improvised steering apparatus worked well, and the two ships proceeded slowly to this port, arriving off Sandy Hook on the morning of the 9th.

The Alaska had on board nearly three hundred passengers, whose safety with that of the officers and crew —to say nothing of the costly vessel and her freight— was imperilled by the accident, and remained in imminent peril for days.

The Alaska is one of the most admirably proportioned and fastest steamships afloat. Her gross tonnage is 8,000. Her engines are of compound inverted, direct-acting, cylinder type, the high pressure cylinder being 68 inches in diameter, and the two low pressure cylinders 100 inches diameter each. The indicated horse-power is 11,000, the highest one on a steamer in the world. The ship has four masts, and is steered by steam. She is built of iron in a series of water tight compartments, and is provided with the most modern methods for insuring comfort and safety at sea.

Yet, as we have seen, by the unexplained fracture of a relatively small piece of metal, this splendid structure, with her enormous power at perfect command, was almost as helpless as a log for many hours. Could anything have been done, with the appliances at her officers' command, to bring the broken rudder under control? The question is submitted to the ingenious readers of the SCIENTIFIC AMERICAN, as one practically worth considering. We should be happy to give space for any feasible suggestions that may be made toward a solution of the problems involved. It may be proper to observe that, had it been possible for the officers of the Alaska to devise a means of grappling and controlling the broken rudder, on the instant, it would have saved not only the present peril to the ship and her passengers, but the cost to her owners of a salvage charge of something like two hundred thousand dollars.

The problem is curious and practical. Inventive reader, how would *you* have gone about to solve it?

Whitworth Compressed Cast Steel.

The following is from the recent report to the President of the Gun Foundry Board:

Upon its first arrival in London, the Board was invited by Sir Joseph Whitworth to examine his works, but with the desire expressed that the visit should be postponed until the close of our foreign investigations. This request was, of course, readily acceded to, and it will be thus seen that previous to the visit to Manchester the members of the Board had received all the impressions that could be produced by viewing the operations at the chief steel factories in France and Russia, and the great factories of Sheffield, in England.

In speaking of the Whitworth establishment at Manchester as unique, and of the process of manufacture at that place as a revelation, reference is specially made to the operation of forging. As to the assorting of ores, and the treatment of metal in the furnaces, there is no intention to draw distinctions; but as to the treatment of the metal after casting, there can be no doubt of the superiority of the system adopted by Sir Joseph Whitworth over that of all other manufacturers in the world. The process here adopted has been kept singularly exempt from scrutiny. Even in the offices of the chiefs of artillery there can be found no information, within the knowledge of the board, which is at all satisfactory upon the subject. Whatever knowledge there is seems to come from hearsay—none from personal observation; and it is only from personal observation that the merits of the system can be fully appreciated.

The system of forging consists in compressing the liquid metal in the mould immediately after casting, and in substituting a hydraulic press for the hammer, in the subsequent forging of the metal.

The flask is made of steel, and is built up of sections united by broad flanges bolted together in such numbers as to accommodate the length of the ingot to be cast. All moulds are cylindrical in form. The interior of the flask is lined with square rods of wrought iron, longitudinally arranged, which form when in place a complete cylindrical interior surface. Where the square edges of these rods meet they are cut away, both on the inside and on the outside, and, at intervals of two inches, small holes are drilled through between the rods, forming a channel way from the interior to the exterior for the passage of gas and flame. The interior is then lined with moulding composition. The flange at the bottom of the flask, as well as that at the top, is perforated with small holes which act as a continuation to the perforations between the segments of the lining for the escape of gas.

The casting is made directly into the mould from the top. On the completion of the casting, the mould is moved (by means of a railway at the bottom of the casting pit, which is a deep trench running parallel to the position of the furnaces) to a position under the movable head of the press, which is allowed to descend until the top is in contact with the metal in the mould, and in this position it is locked; a shower of metal is induced, which ceases almost as soon as commenced, by the complete closing of the mould. The first impress felt by the metal is due to the weight of the head of the press alone. This pressure is gradually increased from below by hydraulic action, applied by four rams upon the table on which the flask rests, until the pressure exerted amounts to 6 tons per square inch. The interval from the commencement of the pressure until the maximum is reached varies with the size of the ingot, being for a 45 ton ingot as much as 35 minutes. During this time the flow of gas and flame from the apertures in the flanges of the flask, at top and at bottom, are continuous and violent, exhibiting the practical effect of the compression. This pressure is applied by the direct action of steam and pumping engines, and is indicated by a dial. At the end of this time the pump is taken off, and a uniform pressure of about 1,500 pounds per square inch is established by attaching an accumulator to the press, and allowed to remain until the metal is sufficiently cooled to insure no further contraction in the mould.

The contraction in length in the mould during the action of the pump, while the maximum pressure is being reached and sustained, amounts to one-eighth of the length of the ingot. After this effect has been produced, there is no farther advantage derived from the pressure in the way of eliminating impurities, but the contraction, in cooling, still goes on, and the pressure by the accumulator is considered necessary in order to follow up the metal as it contracts, for the purpose of preventing cracks being inaugurated at the end and on the exterior of the ingot by the adhesion of particles of the metal to the sides of the mould.

When cooled and reheated, the ingot is brought under the influence of the forging press. This press is hydraulic, with a moving head having the main hydraulic cylinder fixed in it, and it is provided with an arrangement of mechanism for raising and lowering the moving head of the press and for locking the same in any desired position. The press has four hollow pillars screwed part of their length, which are attached to the base of the press by nuts. On the top of the pillars is fixed a cast iron head or table supporting two hydraulic lifting cylinders, the rams of which are fitted with cross heads carrying four suspension bars. These bars pass through the moving head, and are connected at the lower ends by cross bars, which are fastened to the pressing ram. The moving head works between the base and the top or fixed head of the press, and is raised or lowered by the admission or exit of water from the under side of the rams of the lifting cylinders. The moving head can be firmly and rapidly locked at any height from the base which may suit the work to be operated upon. The moving head, as already mentioned, carries a forging or compressing cylinder, which forces a ram down upon the work. By attaching the compressing cylinder to, and making it part of the moving head, a short stroke can be employed when forging objects which may vary in size from a few inches to several feet in diameter.

This in general terms explains the working of the ram. The effect produced by it requires to be seen in order to be thoroughly appreciated, and is altogether different from that produced by the hammer. The heated ingot resists the blow of the hammer, but the insinuating, persevering effort of the press cannot be denied. The longer time (several seconds) during which the effort lasts is a great element in its successful effect. As pressure succeeds pressure, the stability of the particles is thoroughly disturbed and a veritable flow of metal induced, which arranges itself in such shape as the pressure indicates; the particles are forced into closer contact, and the whole mass writhes under the constraint which it is impotent to resist.

The board witnessed the operations of casting followed by that of liquid compression, the enlarging of hoops, the drawing out of cylinders, and the forging of a solid ingot. The unanimous opinion of the members is that the system of Sir Joseph Whitworth surpasses all other methods of forging, and that it gives better promise than any other of securing that uniformity so indispensable in good gun metal.

The latest exhibition of the wonderful character of the Whitworth steel has attracted great attention, and may be stated as indicating the present culmination of his success. From a Whitworth 9 inch gun, lately constructed for the Brazilian Government, there was fired a steel shell which, after perforating an armor plate of 18 inches of wrought iron, still retained considerable energy. The weight of the shell was 403 pounds, the charge of powder 197 pounds, and the velocity about 2,000 feet. The shell is but slightly distorted. The tests of the metal of which it was made show a tensile strength of 98 tons per square inch and a ductility of 9 per cent.

A New Light.

At the last meeting of the Physical Society, some "Lecture Experiments on Spectrum Analysis" were shown by Mr. E. Cleminshaw. The chief point in these experiments was the production of a brilliant light without the use of the electric arc. A small quantity of a solution of the salt to be experimented on is put into a flask in which hydrogen is being evolved by the action of zinc upon dilute sulphuric or hydrochloric acid; the bottle is provided with three necks, one being fitted with an acid funnel, one with a jet, and by the other is introduced a current of coal gas, or better, of hydrogen, by which the size of the flame can be increased and regulated. The jet, which is about one-eighth inch diameter, is surrounded by a larger tube, by which oxygen is admitted to the flame, the result being a brilliant light giving the spectrum of the salt substance, which is carried over mechanically by evolved hydrogen. The spectra of sodium, lithium, and strontium were shown upon the screen; and the absorption of the sodium light by a Bunsen flame containing sodium was clearly seen.

Notice to New Subscribers.

Most subscribers to this paper and to the SCIENTIFIC AMERICAN SUPPLEMENT prefer to commence at the beginning of the year, Jan. 1, so that they may have complete volumes for binding.

Those who desire it can have the back numbers of either edition of the paper mailed to them, but unless specially ordered, new subscriptions will be entered hereafter from the time the order is received.

Bound volumes of the SCIENTIFIC AMERICAN and SCIENTIFIC AMERICAN SUPPLEMENT for 1884 may be had at this office, or obtained through news agents.

All the volumes of the SCIENTIFIC AMERICAN SUPPLEMENT from its commencement, bound or in paper covers, may be had as above.

© 1885 SCIENTIFIC AMERICAN, INC

IMPROVED SHAFT TUGS.

In the accompanying engraving, Figs. 1, 2, and 3, and Figs. 4 and 5 represent two forms of shaft tugs for which letters patent have recently been granted to Mr. Henry F. Bock, of Lansing, Ill. In the first form the shaft loop consists mainly of two straps, between which the buckle and eye are held. The buckle is secured by having its tongue cross bar passed within the curved upper end of a metal plate, the lower part of which forms the base plate of the lock, which is held to the upper end of the loop by rivets. This construction is shown in the sectional view, Fig. 2. The plate takes the strain of supporting the thills off from the outer

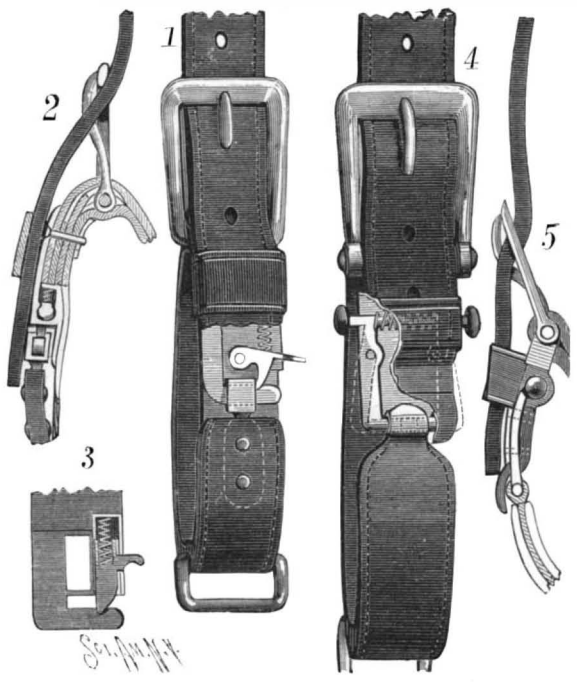

BOCK'S IMPROVED SHAFT TUGS.

strap, and insures the durability of the loop at this point. The outside plate of the fastening lies flat against the outer face of the turned-over end of the outer strap, and the same rivets serve to bind together the straps, the back strap loop, and the plates of the fastening. One side of the base plate is made thick, to form a strong bar, which has an arm extending across the fastening in such a position as to allow the passage over it of an eye held upon the opposite end of the loop. In a recess in the fastening is pivoted a spring catch, Fig. 1 (Fig. 3 is a modification of the catch device), whose point passes into a notch in the arm in front of the eye. Any effort of the eye to slip off from the arm will act the more surely to seat the point firmly in the recess. In harnessing, it is only necessary to pass the lower ends of the loops below the shafts to enter the latter within the loops. The eyes are then passed on the arms and locked. In Fig. 3 the catch slides in a casing, being forced outward by a spring.

In the second form the upper end of the fastening is hinged to the end of the loop, the same pin also serving to hold the buckle. Between the straps of the loop is a metal core, bent around to give the required shape to the loop. The end of the core which locks with the fastening has an eye, ranging transversely, that receives the ends of the catches from opposite sides. The catches are pivoted to the fastening, and their upper ends are pressed outward—thereby pressing

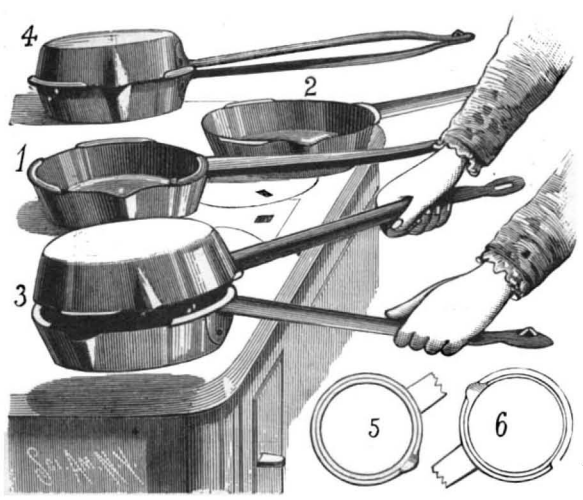

BOCK'S FRYING PAN.

the lower ends toward each other—by a spring placed in a bulged portion of the back plate. The lower end of this plate is bent outward to form a cup, to receive the eye of the loop and act as a guard. The upper end of each catch has a side projection, and by pressing them together the lower ends may be separated.

These loops are simple and durable, and can be quickly operated to secure or release the shafts without passing the ends of the shafts through them.

An Engineer's Story of a Brakeman.

The Chicago *Herald* gives the following graphic account of the experience of an engineer on one of our Western railroads as related by himself:

"Several years ago I was running a fast express. One night we were three hours behind time, and if there's anything in the world I hate, it's to finish a run behind schedule. These grade crossings of one horse roads are nuisances to the trunk lines, and we had a habit of failing to stop, merely slacking up for 'em. At one crossing I had never seen a train at that time of night, and so I rounded the curve out of the cut at full tilt. I was astonished to see that a freight train was standing right over the crossing, evidently intending to put a few cars on our switch. I gave the danger whistle, and tried to stop my train, but had seven heavy sleepers on, and we just slid down that grade, spite of everything I could do. Quicker than I can tell you, the brakeman of that freight train uncoupled a car just back of our crossing, and signaled his engineer to go ahead, which he did sharply, but barely in time to let us through. In fact, the pilot of my engine took the buffer off the rear car. Through that little hole we slipped, and lives and property were saved. Now, that brakeman was only a common railroader, yet he saw that situation at a glance. There wasn't time to run his whole train off the crossing nor even half of it—barely time to pull up one car length by prompt, quick work. He kept his wits about him as, I venture to say, not one man in a thousand would have done, and saved my reputation if not my life. He is now a division superintendent of one of the best roads in this country."

Shall We Sleep with Open Windows?

This question introduces a subject upon which there is a diversity of opinion, both among medical practitioners and individuals. "I have had no bad colds since I learned to sleep with my windows open," remarked a gentleman in the office of the *Medical and Surgical Reporter*, the other day. In reply, the editor says that the only "hard colds" he ever suffered from were contracted by sleeping in rooms to which the night air had free access.

The editor adds that it is well known that the bodily temperature sinks slightly during sleep; the physiological functions act with diminished activity; and hence the resistance of the economy to morbific influences is proportionately lessened.

But it is also well known that at night these influences are more potent and noxious. The air is charged with greater humidity; miasmatic and malarial poisons rise to higher levels, and extend with greater rapidity; the chill of the damp night air is penetrating and dangerous; the emanations from organic decay are more perceptible.

Against these the sleeper is less protected than in the daytime. He has divested himself of his woolen external clothing to put on cotton or linen, and lies between sheets of the same material, between which, at the tops and sides of the bed, the air gains ready access to his unprotected surface. If he is restless, he renders such access yet more easy.

A greater risk awaits him. A sudden fall in temperature at night is no unusual occurrence. In summer a thunder gust, in winter a shift of the wind to the north, often reduces the temperature ten to twenty degrees. The sleeper is unaware of this. He remains exposed to it with no further protection than he found agreeable at the higher temperature until he awakes chilled and stiff, perhaps with the seeds of a serious illness already sown.

These are such positive and unavoidable risks that we should counsel a delicate person to be exceedingly cautious how he ventured on the plan of open windows at night, however much has been said in its favor by popular hygienists.

FRYING PAN.

The engraving shows an improved double pan for cooking purposes, consisting of two sections, each of which has a handle and pan body forming a complete pan. The sections are made to engage with and disengage from each other by constructing the rim on the face of one pan body with extended side lips, and the rim on the other with inwardly bent-over flanges, within which the lips may be made to enter by suitably placing and turning one body upon the other; by reversing the turning action, the sections may be readily disengaged. This form provides for a close and locked fit of the two bodies together to constitute a double or shut pan, and for the separate use of each pan without having to couple or uncouple fastenings. The handles form, when united, a light hollow handle having a round or oval section; they are held together by a nipple formed in the flattened end portion of one engaging with an aperture in the end of the other. Instead of a series of flanges on the rim of one pan, there may be only one of a length of about half the circumference of the rim, the other pan being made with a lip extending wholly around the rim, as shown in Figs. 5 and 6.

This invention has been patented by Mr. Henry F. Bock, of Lansing, Ill.

SUPPORT FOR BUGGY TOPS.

An invention patented by Mr. August Witzel, of Deadwood, Dak., prevents the breaking of the back bows of buggy tops as the tops are let down, and also avoids the excessive shaking of the let down top and overstraining of its parts when the vehicle is traveling over rough roads. The top support and buffer consist of a jointed arm and a rubber buffer (shown in the right of Fig. 1) held between side flanges on the outer end of the arm. The short arm section is attached to the buggy by placing it upon the square portion of the stud fixed to the shifting rail, thus holding it against turning. On the stud, at each side of the arm, is an elastic washer, outside of which on the round part of the stud is a washer, beyond which the end of the top prop bar is loosely held by a nut, so as to turn as the top is raised or lowered. The outer end of the arm is connected by a link to the top prop bar,

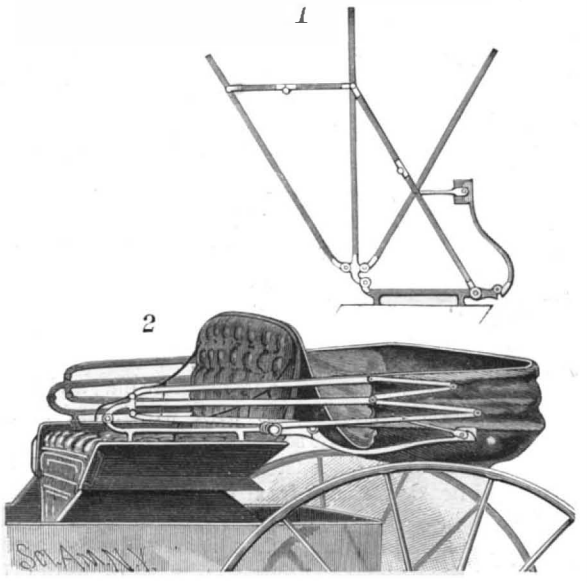

WITZEL'S SUPPORT FOR BUGGY TOPS.

so that when the top is raised the outer arm will also be raised and held by the bar; when the top is lowered, the shoulders at the joint will hold it rigidly in a horizontal position, and the back bow will fall upon the buffer at the end of the arm. This construction gives a substantial support to the top as it falls and afterward, so that it will not be shaken so much as when supported at the shifting rail stud.

STOVE IMPLEMENT.

The instrument shown in the engraving, lately patented by Mr. J. P. Welshans of Montezuma, Ind., is adapted for use as a poker and lid lifter, and for a fire kindler and torch. It is made of malleable cast iron, and consists of a handle portion formed with an eye and a hollow or tubular head terminating in a bent point. The head has side slots and an end opening in the upper part, through which it is filled with asbestos, or any suitable combustible material that will absorb oil may be used, cement being employed to keep the material in place. To use the implement for kindling fires, the head is plunged into oil and is then rolled in ashes; in this condition it can be ignited and inserted in the stove, or used as a torch for burning brush, caterpillars on trees, or for illumination. The rear portion of the head may be made to serve as a

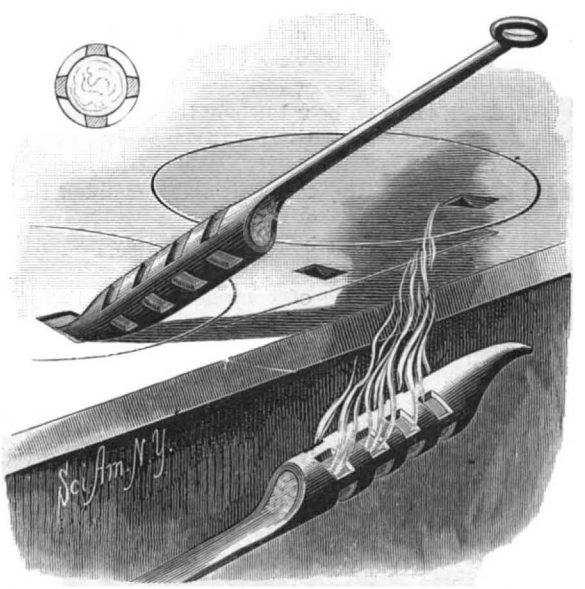

WELSHANS' STOVE IMPLEMENT.

reservoir to retain oil, which will be given out gradually.

ACCORDING to Dr. C. Brame (*Repertoire*, Dec., p. 537), oil of peppermint forms a useful application to burns, easing the pain immediately. The part burned is first immersed in water, and then the oil is painted on with a fine camel hair pencil.

© 1885 SCIENTIFIC AMERICAN, INC

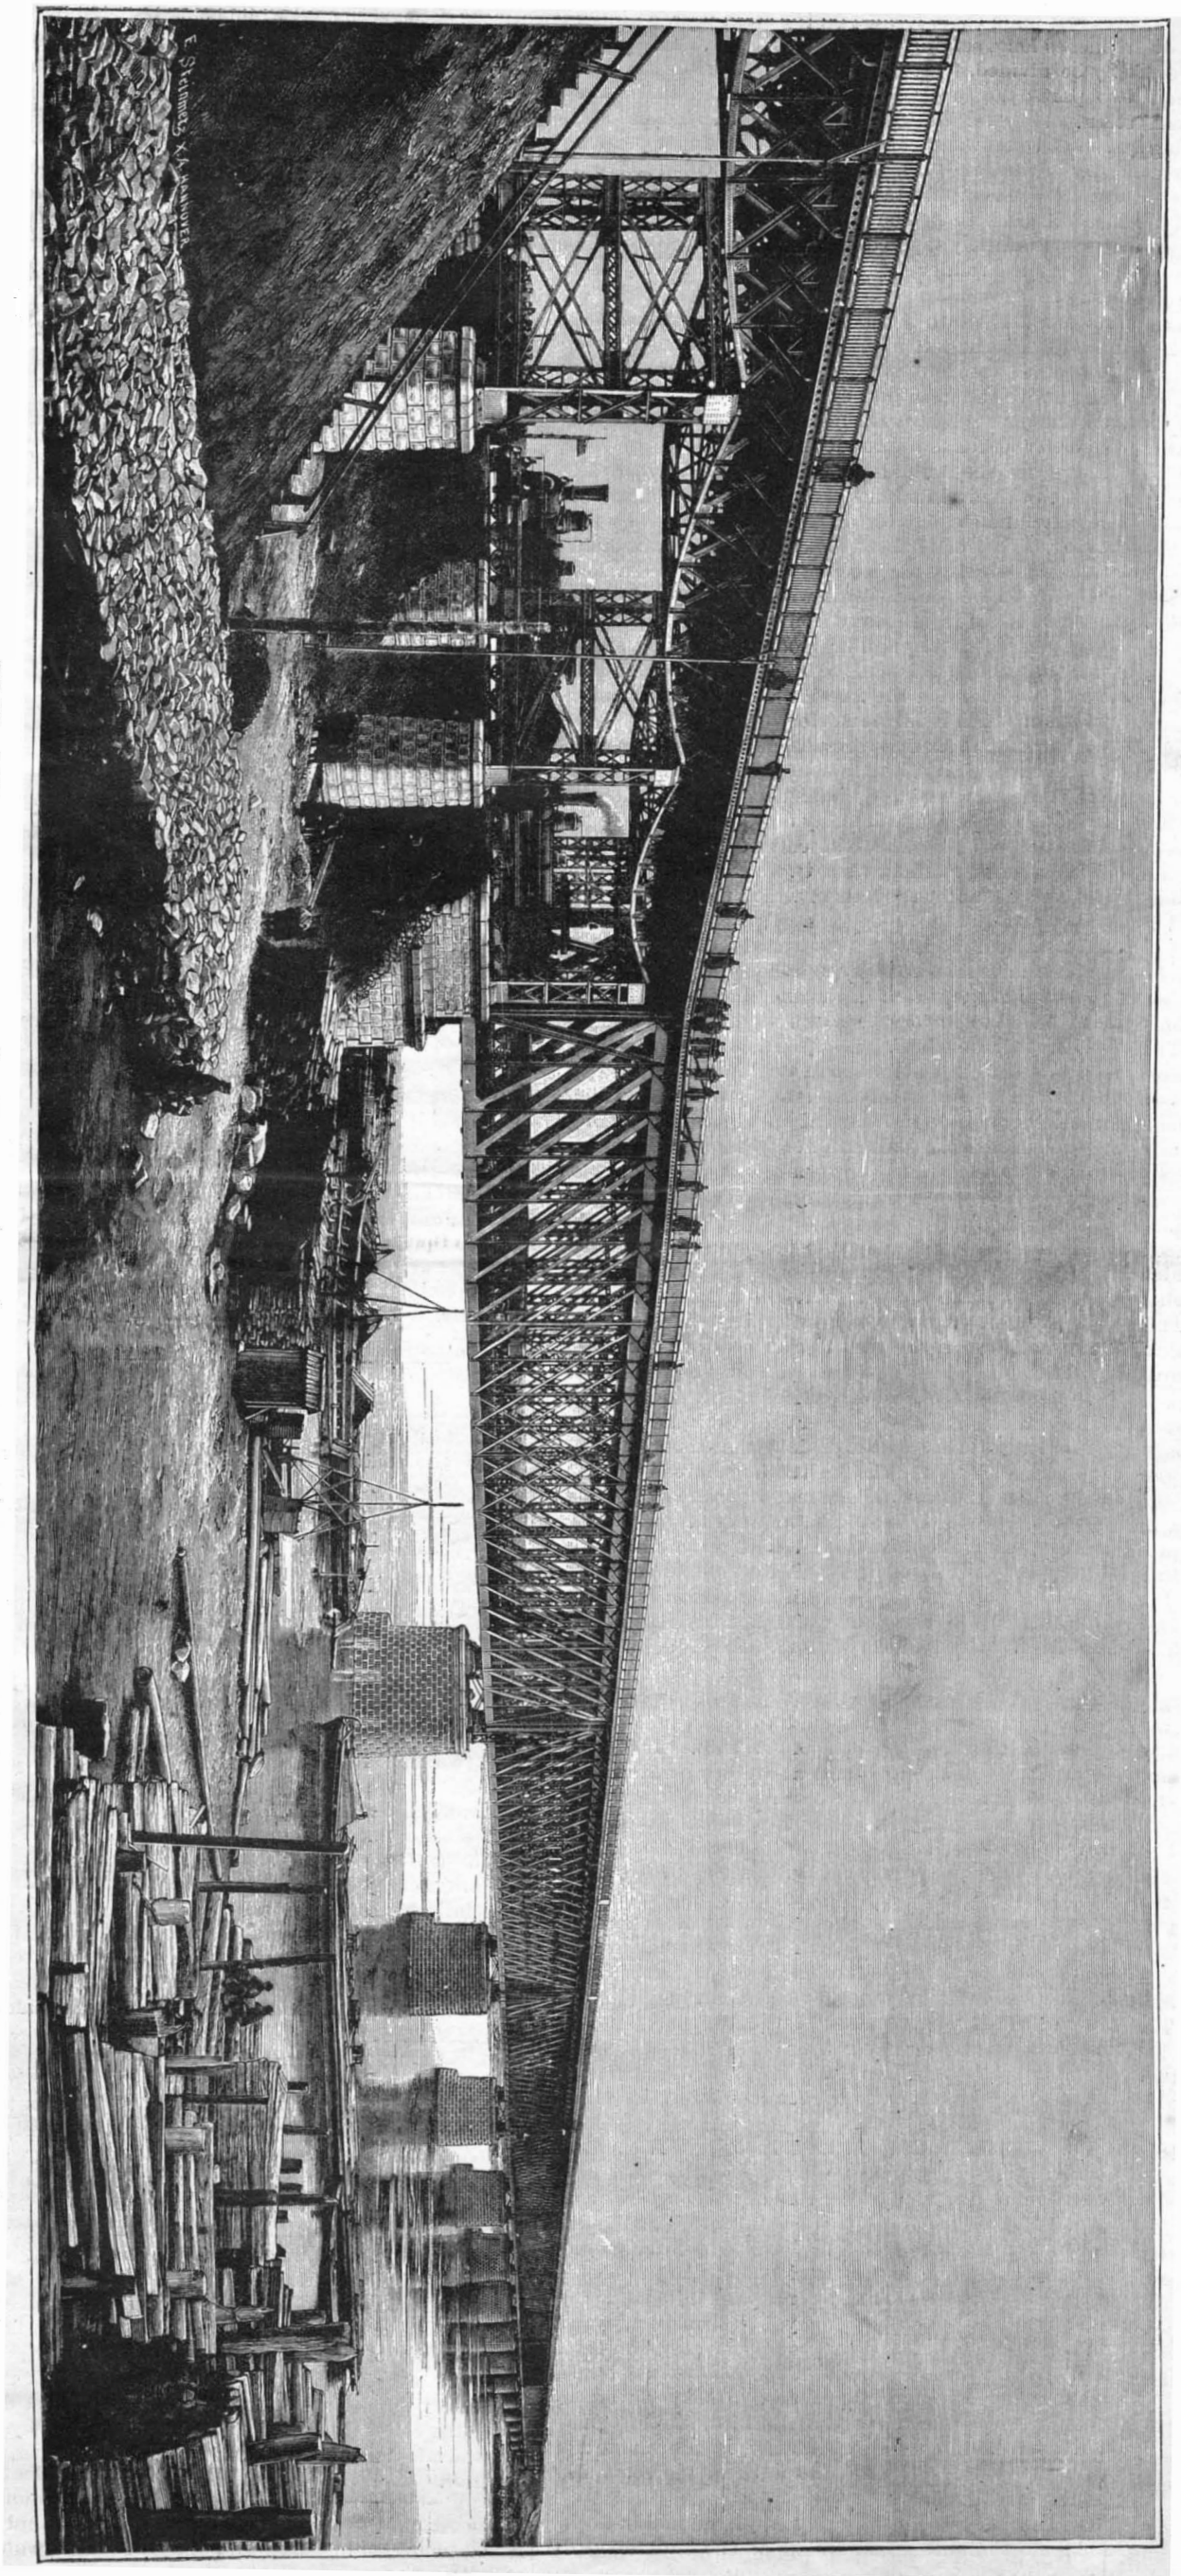

ROAD AND RAILWAY BRIDGE OVER THE RIVER DNIEPER, AT JEKATERINOSLOW, RUSSIA.

BRIDGE OVER THE DNIEPER.

We publish a perspective view of the new road and railway bridge over the Dnieper, at Jekaterinoslow, on the Tekaterine Railway, Russia. This imposing structure, with its approaches nearly three-quarters of a mile long, was designed by Professor N. Belelubsky, of St. Petersburg; the ironwork was made by the Brjonsk Iron Works, and erected under the direction of Chief engineer Mr. W. Beresin.—*Engineering.*

Steel Nails vs. Iron Nails.

According to the Chicago *Journal of Commerce*, the monthly meeting of the Western Nail Association, which was held at Pittsburg on Feb. 11, was not a stirring or enthusiastic gathering. There is little in the outlook of the nail trade in the near future that can be called exhilarating, either to the manufacturers or their employes. The price has ruled low for the past year, and the new card rate of $2.25 per keg, which was adopted by the association, little more than covers the bare cost of production. The most that can be said about the matter is that the demand for nails is fully up to the average, and the capacity for production is so much above the highest possible demand that prices must necessarily rule low. What is of more public importance, however, than the present or future price of cut nails is the positive and unmistakable indication that the business is undergoing a revolutionary process. The steel nail is to take the place of the common iron nail. Already one-half of the nails manufactured in Wheeling are made of steel, and the machinery and plant necessary for their manufacture is being erected in every nail center and at nearly every nail foundry. At first there were doubts and objections urged against their use, as there is to every new innovation. The heads flew off in driving, it was said, and carpenters did not believe they would hold in wood as well as the iron nail. A little more care in the manufacture has obviated the first objection, while experience has shown that the last is wholly groundless.

Under present conditions, steel nails can be made ten cents per keg cheaper than those made of iron, where the manufacturer has to purchase his ingots, and where he manufactures the latter himself, the difference in favor of the new nail is still greater. The effect of the new departure in this industry is likely to be more far-reaching than at first would appear probable. The necessary plant is very expensive, and its erection and general adoption will render practically worthless the vast outlay of capital now invested in the old-fashioned nail plant. It does away with the iron puddler and all his works so far as they have any relation to the nail business. Indeed, it is claimed that the puddler with his inflexible scale, which was the controlling element in fixing the prices of all the nail processes, is responsible for the introduction of the steel nail, and that his obstinacy has left him without an occupation in the nail business in the future. Whatever the reasons may be, and however they may affect the present capital invested in this great industry and men who carry it on, it is very certain, concludes the writer, that the steel nail has come to stay, and that in the course of the next five years it will have as completely supplanted the iron nail as the steel rail has its iron predecessor.

Changes a Half Century has Wrought.

When I was a boy, says Mr. George C. Stone, manager of the Vermilion Iron Mines, to a representative of *The Miller*, and that was forty-years ago—I became a clerk in a hardware store. There wasn't a knife, a pin, a lock, a door knob, a hinge, for sale of American make. Everything came from England. The pins were made of two pieces, one little bit of wire being wound around the head of the pin. It often slipped off, and became an unmitigated nuisance. The solid headed pin of to-day is an American institution, and it took a Yankee to make the machine that not only makes it, but at the same time sticks it into the paper it is sold on. The keys in those days for large door locks were huge crowbars six or eight inches long, and weighing a pound or more. You couldn't carry them in your pocket. All locks were of bolts and springs. The tumbler lock was unknown. These little keys we have nowadays—and they are an American device—show how much progress has been made in the use of iron. All the screws used to be imported, and the gimlet pointed screw of to-day, which bores its own hole, was an American innovation.

© 1885 SCIENTIFIC AMERICAN, INC

THE RUDDER OF A GREAT STEAMSHIP.

The steamship Alaska, of the Guion line, noted as being the quickest vessel on the Atlantic, left Queenstown January 25, and when off the Irish coast met heavy weather; the storm increased in violence until February 2, when it began to abate. On the following day it was found that the rudder had been broken. Owing to the rough water, an effort to steer by means of a drag failed, and sail was put on to keep her head to the wind. On the 4th, the steamship Lake Winnipeg was sighted, and on the next day the vessels were connected by two chain cables, about ninety fathoms long, leading from the Alaska's quarters to the Lake Winnipeg's bow, the arrangement of the cables being as shown in the upper view of our frontispiece. Communication between the vessels was maintained by signals—flags being used in the daytime and lights at night. When the Alaska wanted to go to starboard, the Lake Winnipeg was signaled to throw her bow to port; this movement drew the stern of the Alaska in the same direction, causing her to go forward to starboard; the reverse of this operation permitted the Alaska to move to port. During stormy weather, which followed, the cables parted, when the Alaska was steered with the sails until it became again possible to bring the cables into use. The vessels reached New York, February 9.

As soon as practicable the rudder was removed, when it was found to have been fractured at the lower part of the post; an irregularly shaped piece of the blade, between the first and second lugs, was missing. The rudder was also cracked at the second lug, and at a point a little above, and cracks were found in the upper cross rib of the frame, and in the outer rim, a few inches above the cross rib. As there was no way of attaching chains to the blade of the rudder, the complete severance of the two parts rendered it absolutely useless.

The old rudder consists of an iron frame or skeleton, having a length of about 44 feet, and an extreme width of 7 feet 9½ inches, the width of the blade proper at its widest point being 6 feet 9½ inches. The rudder post is 13 feet 2½ inches long, and terminates in a head 11¼ inches in diameter, formed with two longitudinal grooves to receive keys by which it is held to the center of the circle or wheel used to operate the rudder. The back or stock part of the frame is 9½ inches wide by 6½ inches thick; the curved or outer portion is 5¼ inches wide by 3¼ inches thick, and joins the stock at each end. In the lower part of the stock is a semicircular recess, 2¼ feet in diameter, which enables it to clear the outer journal of the propeller shaft as the rudder is moved from side to side. This circular portion is 10 inches wide, of the same thickness as the stock, and is united to the rim by a cross piece 7½ inches wide; just below the second lug is a cross piece 7 inches wide. Upon the back of the stock are four lugs or eyes placed 6 feet 4¼ inches apart, and provided with tapering holes in which the upper ends of the pintles fit. Upon the lower end of the rudder is a pivot 6½ inches long by 5½ inches in diameter, that works in a socket formed in a side projection of the stern post. The latter is a heavy iron column having a square cross section, and carrying the journal for the end of the propeller shaft and four eyes to receive the lower ends of the pintles. The two sides of the frame are covered with iron plates, the rivets in the curved rim passing entirely through, while those in the inner part are tapped into the stock. To prevent the plates from being dented or approaching each other, the open spaces in the frame are filled with wood. The weight of a rudder of this description is about 12 tons.

The new rudder—the frame of which was forged at the foundry of John Roach, and which was finished at the works of McCurdy & Warden, this city—while not varying in general dimensions from the old one, is essentially different, the changes resulting in increased strength in those parts which experience proved to be weak, and in providing a means for operating the rudder in case the rudder post should be broken. The amount of metal at the upper part of the blade has been increased, there are three cross ribs instead of two, and an eye has been formed on the rim at A (shown in the engraving of skeleton of new rudder), to which chains may be attached, should the other methods of moving the rudder become disabled. (It may be stated in this connection that it is customary in building rudders for first-class vessels in this country to provide a series of eyes upon the outer edge of the rudder, so that it could be used even under the most unfavorable of conditions.) The covering plates are seven-sixteenths of an inch thick, the seam being about in the middle of the blade; they are secured by rivets, seven-eighths of an inch thick, spaced 6 inches apart, and extended clear through. The interior spaces are filled with wood.

Extreme accuracy is required in the pivoting of these great rudders, as a simple bolt extending loosely through each pair of eyes, or a single rod passing through all, would not allow the rudder to so quickly and reliably perform all the movements expected of it; and would, besides, increase the wear of the joints without facilitating the work of repair. The rudder eyes rest upon those formed on the stern post, a pintle, 26 inches long, serving to hinge each pair. The pintle may be divided, for convenience in describing it, into two parts; the lower portion—that which enters the stern post eye—is 5¾ inches in diameter, 12 inches long, and is covered with a brass sleeve. The upper portion tapers toward the top, which is threaded to receive a nut; the base of the taper is 5 inches and the top 3¾ inches in diameter. The holes in the eyes on the rudder are accurately tapered to fit the pintles.

Placing the rudder in position is a comparatively easy task: the pintles are put in the rudder eyes, and the nuts screwed down tightly; the head is then carried through the rudder hole in the deck, and the rudder raised until the lower ends of the pintles are free to swing above the stern post eyes. The rudder is guided until the pintles hang suspended directly over the eyes, which they enter as the rudder is lowered.

There are six methods of steering, all of which depend upon the rudder remaining in a perfect condition. The hand and steam steering gear is shown in the engraving. The rudder head is keyed to the center of an iron beam, which extends across a wheel placed a few inches above the deck. This wheel, about 12 feet in diameter, is made of heavy iron plate, and upon its outer surface is a rectangular groove formed by angle irons; just above this groove is an angular one. Immediately forward of the wheel is a double engine, still forward of which is the hand steering gear.

On the engine shaft is a small pinion gearing with a cogwheel on a shaft directly below; this shaft carries a pinion gearing with a large wheel mounted on a shaft extending across (longitudinally of the ship) the frame below the engines. The rear end of the shaft has a beveled pinion meshing with two beveled wheels, one at either side, and the shafts of which make an angle a little greater than 90 degrees. Upon each of these shafts is a drum formed with a spiral groove, in which run the chains that work in the upper or angular groove on the rim of the wheel. The other ends of the chains are attached to powerful springs secured to the opposite side of the wheel. The journals of each of the large beveled gears are made in one casting, bolted to the deck. The springs serve to take up all shock, which would otherwise be transmitted to the gearing, during the sudden striking of the rudder by a wave. This apparatus can be instantly thrown out of gear, without stopping the engines, by moving a lever located in front of the engines.

On the hand wheel shaft are two hand wheels, between which is a pinion meshing with a wheel on a shaft below; the second shaft has a pinion in gear with a wheel on a shaft carrying a chain wheel. A chain running in the rectangular groove leads from one side of the wheel to a pulley, from which it passes to a pulley revolving in a vertical plane, and located in front of the chain wheel over which the chain passes and returns to the large wheel along a similar route. On the shaft of the chain wheel is a sliding clutch by which the hand steering mechanism may be thrown in or out of gear by the simple movement of a lever.

In the steam chest between the engine cylinders is a valve, the shifting of which changes the direction of motion of the engines. Beneath the piston rods is a small shaft, on one end of which is a beveled pinion. A slight movement of this shaft serves, through the intermedium of a lever, to shift the valve. Meshing with this pinion is a second one mounted upon the end of a vertical rod, which is conducted to the wheel house, located in the forward part of the ship. It will be seen that the steam steering gear can be operated from the wheel house. Meshing on one side of the pinion on the shaft moving the lever is a third pinion, the shaft of which leads to a standard where it terminates in a beveled pinion meshing with a similar one on a shaft placed at right angles to the first. The other end of this shaft is held in a standard, on top of which is a dial, the index finger of which shows the distance to either side which the shaft has revolved, and consequently the exact position of the rudder. On the dial are the words "port" and "starboard." The end of the shaft projecting beyond the side of the dial box is squared to receive a hand wheel, which may be used to shift the valve in case the rod leading to the wheel house should fail to work.

The signals from the wheel house would then be communicated through means of a dial placed in a conspicuous position, on the wall of the compartment, so as to be clearly seen by the man at the small hand wheel. In the center of the dial is a pointer moved by wires extending to the wheel house. In the center of the top of the dial is the word "course," and to the right are the words "steady," "starboard," and "hard;" on the left are the words "steady," "port," and "hard." There are also dials in the wheel house to show the position of the rudder. Should all the devices we have described become disabled, the ship could still be steered by chains attached to the wheel, led through openings in the side walls of the room and guided to a winch.

On February 26 the Alaska was placed in dry dock, and a most minute examination of the hull failed to detect any signs of damage resulting from the severe treatment she experienced while being buffeted by the waves.

EXTINGUISHER FOR LAMPS.

The extinguishing plate is hinged to a narrow strip of spring metal, the ends of which are so formed that the strip can be slipped over the end of the wick tube, as shown in Fig. 1. When in a raised position, the plate is prevented from falling backward by an arm projecting from the hinge and moving with the plate, coming against the wick tube. Upon the under side of the plate is secured a little piece of metal, the weight of which causes the plate to fall forward as the wick is drawn down.

When the wick is raised, it presses against the plate and holds it in a vertical position. The plate makes the flame spread and burn more evenly than it otherwise would, thus producing a much better light. When the wick is turned down, the plate falls forward upon it, instantly extinguishing the flame, and the coal that may remain upon the wick is smothered out, so that the smoke and disagreeable smell produced by ordinary lamp burners when the light is blown out are avoided; the danger of explosion, which sometimes is a direct

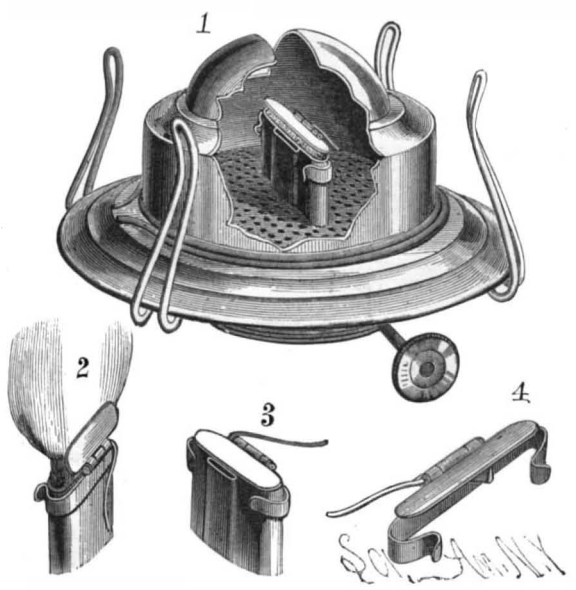

MILLEN'S EXTINGUISHER FOR LAMPS.

result of blowing down the chimney, is also done away with.

Additional particulars may be obtained from the inventor, Mr. William Millen, of 431 East 83d Street, New York city.

Cutose.

Cutose, the substance which covers and protects the aerial organs of plants, approaches the fatty bodies in its properties and composition, though distinct from them in certain other respects. Cutose resists the action of energetic acids; it is insoluble in dilute alkalies; neutral solvents have no action upon it, but it is modified by oxidizing agents and boiling alkaline liquids. With nitric acid it yields at first resinous bodies, and afterward suberic acid. Alkalies, and even alkaline carbonates, at a boiling heat dissolve cutose, split it up, and convert it into a kind of soap, soluble in water and insoluble both in excess of alkali and saline solutions. Baryta, strontia, and lime effect the same decomposition. Under the influence of bases, cutose gives rise to two new fatty acids, the stereocutic and the oleocutic. The former acid differs from all known solid fatty acids. It is white, fusible at 76°, almost insoluble in cold alcohol and ethers, scarcely soluble in boiling alcohol. Its true solvents are benzol and glacial acetic acid. On boiling this acid with dilute alkalies, we obtain gelatinous salts insoluble in water. These two acids, when once modified, acquire new properties, which approximate them much to the primitive cutose. They form a neutral substance, which on treatment with caustic alkalies experiences a kind of saponification.—*MM. E. Fremy and Urbain.*

How to Fill a Boiler.

"I filled this boiler when we first started without a pump, and from a well, or reservoir, below the level of this floor." This from an engineer of a stationary, who is a very capable man. "Well, I suppose you used buckets," was the reply. "No, the boiler filled herself." The boiler was new and had just been located, the connections made, and all was ready for a start except the filling of the boiler with water. The force pump had not been connected, and, in fact, had not been placed, when the engineer thought it well to fill his boiler. He built a fire of light stuff in the furnace, after putting in a few pails of water, connected hose with the water reservoir, and after the fire had burned down he opened the connection, and the water came in with a rush, the creation of a vacuum impelling the inrush of the water.

RECENTLY, at Louisville, Ky., after several hours of dark fog, a drenching shower took place, during which small fishes—minnows—fell to the ground.

© 1885 SCIENTIFIC AMERICAN, INC

Correspondence.

How Water May Flash into Ice.

To the Editor of the Scientific American:

Three times during the winter I have seen water instantaneously converted into ice. I have read that water could be reduced to a temperature lower than 32° F., and still not form ice, and have seen water raised above 212° F. which, when agitated, suddenly exploded with such force as to nearly empty the vessel containing it. The instantaneous formation of ice I saw in a large tin pail partly filled with water. There was ice on the floor, cups partly filled with water held thick coverings of ice, but the water in the pail was as clear as crystal. Intending to dip a cupful, I accidentally struck the edge of the pail, and quick as a flash of light there shot from the sides of the pail, toward the center, long, slender needles of ice, beautifully marked on their edges. These needles in a few seconds grew until the water, for an inch or so below the surface, was closely packed with these delicate shoots, which, when my cup reached them, easily shattered.

W. J. R.

Palmyra, N. Y.

[The peculiar phenomenon of the spasmodic setting of crystals is well known and familiar to chemists. It is beautifully shown in microscopic crystallization. Under the microscope the crystallic needles are plainly seen to shoot out like the arrow from a bow. In some species of fungus the same spasmodic effect is noticed in the development of the spores.

Its cause probably lies in the power of the attraction of cohesion, which in this class of phenomena is a resisting power to a change of condition.—ED.]

The Nature of Electricity.

In two lectures recently delivered before the Royal Institution, Prof. O. J. Lodge, F.R.S., endeavored to explain to crowded audiences the modern views of the real nature of electricity. It was often said, he remarked, that we did not know what electricity was, and the statement was still largely true, but it was not so true as it was twenty years ago. Some things were beginning to be known about it, and though modern views were tentative, and might well require modification, nevertheless some progress had been made, and it was not unsuitable at the beginning of a new year of progress and discovery to try and set forth the position of thinkers on electrical subjects at the present time.

It had been discovered by Faraday and Clerk-Maxwell how like the behavior of electricity was to that of an incompressible fluid or liquid. One was not thereupon justified in asserting that electricity was a liquid, but it was perfectly certain that it behaved in many respects exactly like one, and it was, therefore, a step necessary to be made to understand and grasp the analogy between electricity and a liquid—in other words, to develop a liquid theory of electricity. Let them imagine a fish in the deep sea; he was surrounded and permeated by water, but must be completely unconscious of its existence. For a fish near the surface even to postulate the existence of water from the effects of currents and waves would be an act of scientific discovery analogous to our discovery of the existence of the atmosphere; but for a fish in the serene depths of the ocean the discovery of water would be an almost impossible one.

Now, we were living immersed in electricity in precisely the same way, but we were in a more favorable position for discovering its existence, because it behaved for the most part more like a liquid entangled in some elastic medium or jelly than like a freely moving liquid. Substances in which it could freely move about were called conductors; substances in which it was entangled were insulators or dielectrics. Conductors must be regarded as holes and tubes in the jelly, permitting storage and transfer. The jelly was such as only to resist the motion of electricity; it permitted the free locomotion of ordinary matter. The existence of these two classes of bodies, conductors and insulators, had enabled the human race with difficulty at length to discover the existence of this all-permeating liquid. An electrical machine was to be regarded as a pump which could transfer the fluid from one cavity to another; thus charging one conductor negatively, the other positively. Charge was to be regarded as either excess or defect from the normal supply of fluid, causing a strain.

Electrical attraction and repulsion were all explicable by the strains thus set up in the surrounding elastic medium or jelly. The increase of the capacity of a conductor by bringing an earth-connected body near it was accurately representable by thinning the elastic coat surrounding a cavity; and a hydrostatic model of a Leyden jar could be easily made with an elastic bag inside a rigid vessel, with pressure gauges for electrometers; this behaved in all respects exactly as a Leyden jar—exhibiting discharge by alternate contacts and everything. Discharge was typified by a relaxing of the strain and by twisting of the dielectric medium in some place. Certain phenomena connected with discharge suggested obscurely that what we called negative charge was not merely a defect of supply, but was a supply of something of an opposite kind—that there were, in fact, two electricities, positive and negative, which combined together into a neutral liquid. It might be that the other was then composed, and that what we called an electric current was really the simultaneous transfer of the true components of this liquid in opposite directions, and that strains in dielectrics were due to attempted shear of the other. The phenomena of electrolysis strongly suggested and supported this view.

Was any other motion possible to a liquid? Yes, a whirling and vibrating motion. By coiling up a conductor so as to get an electrical whirl, we discovered that we had produced a magnet, and all the phenomena of magnetism could be developed on the hypothesis that magnets consisted of such electrical whirlpools. One whirl had the power of exciting another in neighboring conductors, and these so excited whirls were repelled. In this way could be explained the phenomena of diamagnetism. A disk of copper at the end of a torsion arm was repelled by a magnet until the current induced in it had died away, which was very soon in that particular case; but currents in molecules might, for all we knew, last for ever until actively destroyed. Atoms were already endowed with perfect elasticity—why not with perfect conductivity too?

Finally, electricity in vibration, if rapid enough, constituted light; and it was easy to see that on this hypothesis conductors must be opaque, and that transparent bodies must insulate, which agreed with observation. If a ray of light were passed along a line of magnetic force, it ought to be twisted, as was shown by the pertinacious experimental power of Faraday before the fact could be understood and before the scientific world was ready to receive it. The profound significance of this fact was first perceived by Sir William Thomson, and stated by him in a most powerful and remarkable note, and upon this Maxwell founded his electrical theory of light.

"I have endeavored," added the lecturer, "to give you pictorial and mechanical representations of electrical phenomena, and thus to lead you a step in the direction of the truth; but I must beg you to remember that it is only a step, and that what modifications and addenda will have to be made to the views here explained I am wholly unable to tell you."

Power for Wood Working Tools.

BY WM. LEE CHURCH.

I recently had occasion to make some indicator tests of power in planing mills. As there is a very general misapprehension of the actual power consumed by wood working tools, some of the results may be instructive. The power given is in every instance the *net power of the tool itself*, exclusive of the friction of the shafting. The power for wood working tools is usually a vague estimate from the belt transmission, and is liable to great error. The following results are, on the contrary, actual measurements under the conditions obtaining, and may be relied on as such, however much at variance with preconceived ideas.

The first test was made at the mill, and by the courtesy of Anson Eldred & Son, Fort Howard, Wis. Power: One 14 x 14 inch Westinghouse engine, 280 revolutions.

Total friction of shafting and engine	21·00
No. 38 Sturtevant exhaust fan, 1,000 rev	18·06
14 inch rip saw, cutting 1 inch stuff	5·33
14 inch matcher, on 6 inch pine	21·25
60 inch circular re-saw, splitting 12 inch pine	5·38
24 inch matcher, on 10 inch pine	7·66
Edger, 18 inch saws, one cut, in 2 inch pine	7·68
24 inch circular re-saw, splitting 6 inch pine	5·30
Double siding planer, rabbeting and surfacing two 6 inch pine strips, both edges	11·20
30 inch double surfacer, dressing 24 inches wide	17·00
12 inch moulder sticking one piece 2½ inch ogee batten	12·33

It will be noted that the 24 inch matcher, on 10 inch stuff, required less power than 14 inch matcher on 6 inch stuff. The reason of this lay in the fact that the feed was slower on the larger machine.

The following results were from the mill of F. Blakesley, Schenectady, N. Y. Power: One 10 x 10 inch Westinghouse engine, 339 revolutions:

	Horse Power.
Friction of engine and shafting alone, net	8·97
One No. 31 Sturtevant exhaust fan	8·64
12 inch matcher, on 6 inch spruce	15·21
Same running empty	10·01
24 inch single surfacer, dressing 24 inch spruce	9·75
Roger's No. 2 four side moulder, sticking 2 x 1¼ inch pine	7·28

The following small tools were taken in a group in actual operation:

One 12 inch rip saw, one 16 inch cross cut saw, one 3 side sticker, one tenoning machine, one dovetail and boring machine, one band saw, one gig saw, one 12 inch cross cut saw	aggregate net 7·02

A further experiment was made to determine the power required to start a planer from a state of rest. The engine, shafting, and blower were first indicated alone, showing 8·97 horse power; the belt was then shifted on a 24 inch double surfacer, and a continuous curve taken until full speed was obtained. The maximum power required to start the planer was 31·2 horse power net, the difference of 18·72 horse power being the amount of power required to develop the speed of the tool over that required to maintain the speed when reached. The above test was, of course, made with the planer running empty.

The above line of experiments indicates that more power is absorbed in driving ordinary planing mill machinery empty than is required to actually dress the lumber.—*Wood and Iron.*

The Band Saw.

A writer in the *Northwestern Lumberman*, who claims to have had fifteen years' practical experience in using band mills, says:

We have been using the band sawmill for sawing logs for the last fifteen years with unvarying success, and at no time have we used a band mill—and we have used nine or ten of them—that had not a sawing capacity of 20,000 feet of 1 inch boards per day of ten hours, and at times we have sawed 30,000 feet of soft wood in ten hours. As to its average capacity, we sawed 6,000,000 feet in one year with one machine, running part of the time day and night.

It has been a great wonder to me that the live, shrewd Northwestern lumbermen have gone on from year to year, for at least the last ten years, without seeing and testing the advantages of the band saw in the manufacture of lumber economically, as regards both the lumber saved and the power required to manufacture a given quantity of boards from a given quantity of logs—scale measure—in a given length of time.

A 60 horse power engine will run three band sawmills with a capacity of 20,000 or 25,000 feet each, per day, with a surplus of power to run the necessary edgers and cut-offs to trim the lumber. Take this as a starting point, then say the mills average 20,000 feet each, and you have 60,000 feet per day of ten hours. On this amount you save in saw kerf—the band saw taking only one-twelfth of an inch—over the ordinary circular saw in use, at least 2,000 feet on each 10,000 feet sawed, which would make 12,000 feet, or one-fifth more lumber from what goes into sawdust, for which in some cases furnaces are erected to burn, the "hells" costing more than one band sawmill.

This 12,000 feet destroyed would at least be worth $10 per thousand, or $120, which is lost per day—or $24,000 in a season's sawing of 200 days. This $10 per thousand is a low estimate for first-class pine lumber, as a considerable proportion would be uppers worth 50 per cent more, which would make it at least $30,000 lost (or saved) in 200 days' sawing.

For instance, say three mills cost $6,500—put up and started, exclusive of power; you would still have a nice little margin of $23,000 on 200 days' sawing, and also have your mills.

To the mill men who value the lives of their men—and we know both the humane and thrifty do—we say we know of fifty band sawmills in use that have never, for the last ten years, fatally injured a man.

Another advantage in the use of band sawmills in pine or any other kinds of lumber: you can saw a taper log or a partly rotten log, and get all the good lumber out of it there is in it, which you cannot do with a gang saw.

Disinfecting Rags by Steam.

Importations of rags are now permitted where the rags are subjected to a process of disinfection. The process, as conducted by the Paper Stock Disinfecting Company of New York, is as follows: The apparatus consists of a large air-tight box, into which each bale of rags is drawn by means of five screws, which at the same time make five perforations from end to end of the bale. When this is completely inclosed in the box, the opening is closed, and superheated steam is injected through the screws, which are hollow and perforated with holes which permit jets of steam to penetrate through the rags in every direction. An escape in the upper part of the box is provided with a bath intended to intercept the passage of any disease germ into the air. Most germs of life are killed at a heat of 212 or 215 degrees, but the steam employed in this process is raised to 330. An exposure of four or five minutes to this degree of superheated steam heats the bale so that it takes two hours for it to fall below the germicide point of 212. The actual effect of this operation has been recently proved in a most satisfactory manner under auspices which give the results obtained a scientific value. The experiments were conducted under the eye of Major Sternberg, U. S. A., with disease germs (cholera and smallpox) brought by him from the Johns Hopkins University. They were inserted in the interior of two bales of rags, one of which, for the sake of making a comparative test of sulphurous acid and superheated steam, was subjected to treatment in the same apparatus with the former agent, and one with the latter. The germs were then collected, and returned to the Johns Hopkins University, where Major Sternberg found by inoculation of rabbits that the germs treated by superheated steam had been killed, and did not communicate disease, while those treated with sulphurous acid were fatal to the subjects inoculated.

© 1885 SCIENTIFIC AMERICAN, INC

A GREAT ELECTRIC MACHINE.

We illustrate a machine which has just been completed by Mr. James Wimshurst, one of the consulting engineers to the Marine Department of the London Board of Trade, in his own private workshop, and which is, undoubtedly, the most powerful and efficient electrostatic machine in existence. This apparatus, says *Engineering*, has been constructed for and presented to the Science and Art Department at South Kensington by Mr. Wimshurst, the cost of the raw material being defrayed by the Department.

On reference to the illustration, it will be seen that the form of this machine is nearly identical with the smaller type which we illustrated and described two years ago, its points of difference lying in its size and in the construction of the supporting parts. The diameter of the circular plates of the great machine is 84 inches, of plate glass three-eighths inch in thickness, and weighing 280 pounds each. Each of these disks is pierced at its center with a hole, 6½ inches in diameter, and is firmly attached to a gun metal boss, 15 inches in length, carrying the disk at one end and a pulley at the other, and which is bored so as to run freely on an iron tube, 3 inches in diameter, this tube being supported at each end by strong oak trusses, rising from a firm base, also of oak, and which is fitted with lockers at each end, for holding spare parts and accessory apparatus. The heads of the two trusses, or A frames, consist of massive castings of gun metal, which are so shaped as to hold the hollow iron tube and the ebonite rod to which the collecting combs and discharging terminals are attached. The iron tube projects at each end beyond the trusses, and to the projecting ends are attached the brass "neutralizing" rods, which terminate in light wire brushes, shown in the illustration.

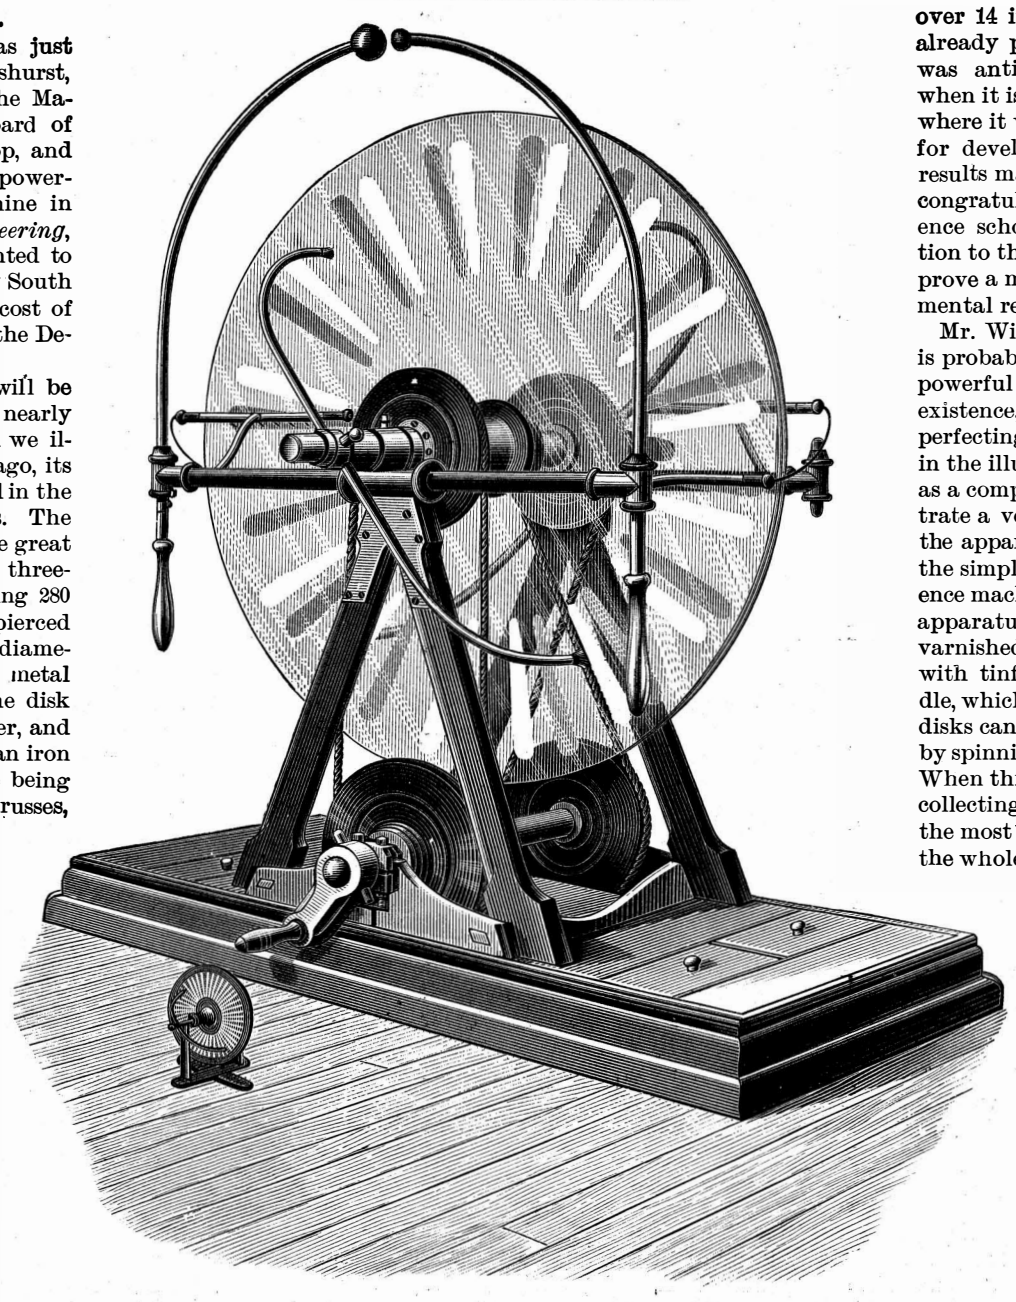

THE WIMSHURST SEVEN FOOT DUPLEX ELECTRIC MACHINE.

To the disks, which are well varnished with an alcoholic solution of shellac, are attached, at equal angular distances apart, radial sectors of tinfoil, sixteen on each disk. These sectors are 19 inches long, and have a mean width of 1·65 inches, thus having an area of 31·35 square inches. There is thus on each plate a metallically coated area of 500 square inches, or a thousand square inches on the two disks together.

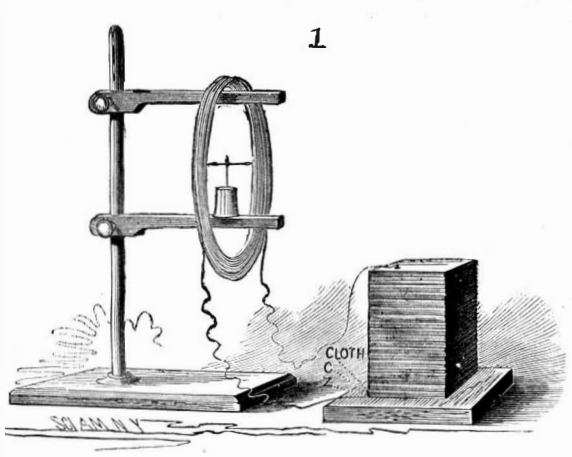

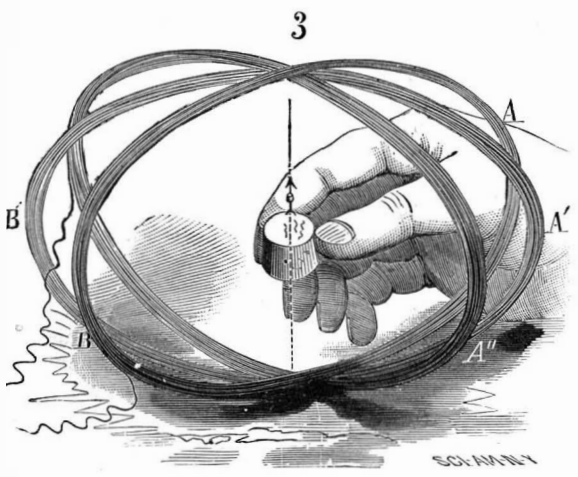

The apparatus may in principle be regarded as a sort of double-acting "Nicholson's revolving doubler," the sectors on the one disk acting as inductors on the other, and *vice versa*, and that the extraordinarily high efficiency of the machine is probably due to the fact that both plates contribute charges of electricity to the collecting combs, and that the sectors on the one disk act as inductors and as carriers respectively to those on the other when they approach the best positions for those respective actions to take place.

The collecting combs are attached to the discharging terminals, as shown in the engraving, by interchangeable brass rods, some being straight, while others are bent, so that their positions with respect to the horizontal diameters of the disks may be varied within a range of about 16 inches, that is to say, between about 8 inches above and 8 inches below the horizontal diameter. The discharging rods or terminals are constructed of brass tubes, 1¼ inches in diameter, and are fitted with terminal balls of different diameters, which are also interchangeable. The distance of these balls apart—and therefore the striking distance of the spark discharge—can be varied by the glass handles with which the discharging rods are fitted at their lower ends, and as these handles have their attachment in a hinge joint, they can be used as levers wherewith to turn the terminal rods around a vertical axis, and thus to vary the distance between their upper ends.

The two disks are rotated in opposite directions by the lower driving gear, shown in the figure; this consists of a horizontal spindle fitted with a winch handle at each end, and carrying a pair of oak pulleys which are connected respectively to the two pulleys attached to the disks by endless cords, one of which, being crossed, causes one disk to be rotated in the opposite direction to the other; and as the height of the bearings of the lower spindle is adjustable, the driving cords can always be maintained perfectly tight.

The principal characteristics of this form of electrostatic machine, and to which its exceptionally high value as a laboratory instrument is due, are (1) that it is readily self exciting in almost every condition of the atmosphere; (2) that the polarity of the apparatus never changes, as it is so liable to do in other forms of induction machines; (3) that the charge is very large compared with the area of the glass employed in the disks; and (4) the small cost at which the machine may be constructed.

Although the great machine which we illustrate in this notice was working in a workshop in which there was a steam engine and boiler at work, and consequently with a considerable quantity of water in the atmosphere, and although it was closely surrounded with lathes and shafting and other metallic conducting bodies, not only did it pick up its charge even before a complete revolution was made, but kept up a constant stream of discharge sparks between its terminals of over 14 inches in length. The results have already proved far more satisfactory than was anticipated before it was tried, but when it is set to work at South Kensington, where it will be under far better conditions for developing its full powers, still higher results may be expected. We may, indeed, congratulate Professor Guthrie and the science schools generally on this new acquisition to the physical laboratory, which must prove a most valuable instrument for experimental research.

Mr. Wimshurst has in his laboratory what is probably the largest collection of the most powerful electrostatic induction machines in existence, having worked for several years in perfecting this class of apparatus. We have in the illustration introduced (partly to serve as a comparison of size and partly to illustrate a very interesting and typical form of the apparatus) a sketch of what is perhaps the simplest and the cheapest electric influence machine ever constructed. This little apparatus consists simply of two disks of varnished glass, 12 inches in diameter, fitted with tinfoil sectors, and mounted on a spindle, which can be held in the hands, and the disks can be rotated in opposite directions by spinning them with the finger and thumb. When this is done—although there are no collecting combs or discharge conductors—the most brilliant effects can be produced, the whole apparatus literally bristling with electric discharges immediately the rotation commences, and one of the most remarkable and not the least valuable features of this beautiful little instrument lies in the fact that it can be constructed in a good, salable, and workmanlike manner and sold at a very small charge.

INTERESTING ELECTRICAL EXPERIMENTS.

To the Editor of the Sci. Am.:

Judging from the interest exhibited by the young people in our public library, on the arrival of the SCIENTIFIC AMERICAN, that readers of that class might find the details of some simple experiments acceptable, I send a description of two such, which can be made without much outlay, with simple, easily attainable materials, and which may even possess some interest for older persons.

FIRST EXPERIMENT.

At any tin shop or coppersmith's can be procured, for a trifle, scraps of sheet copper, zinc, and iron, and at any tailor's a few remnants of cloth or flannel. The other materials needed are about twenty-five cents' worth of No. 22 insulated copper wire and a small magnetic needle, costing perhaps 50 cents; both of which

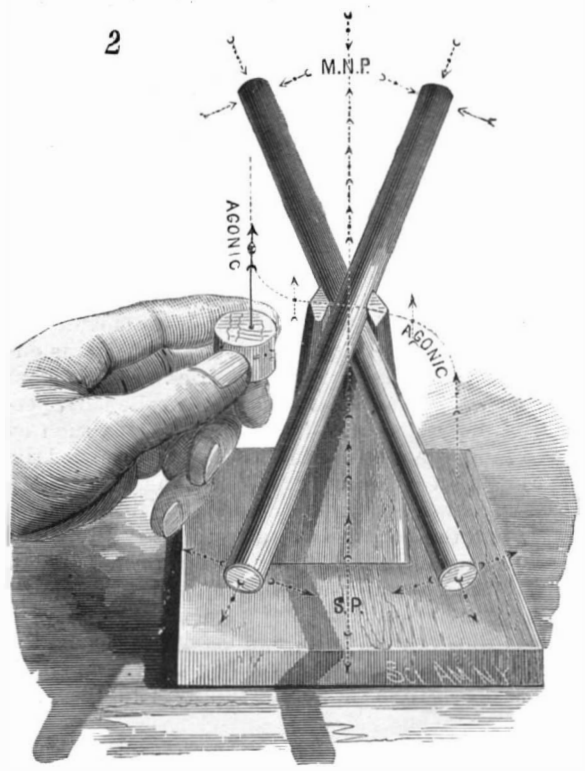

investments may be considered permanent, as the needle and wire can be used for many other interesting experiments. The only additional requirements are a handful of common salt, or, if preferred, one or two cents' worth of commercial sulphuric acid, which, to prevent accident, may at once be mixed slowly with ten times as much water.

The young experimenter may now cut the zinc and

© 1885 SCIENTIFIC AMERICAN, INC

copper and cloth into pieces of about two inches square, dipping each piece of cloth into a saucer containing the dilute sulphuric acid. He is now ready to commence piling, on a small block of wood, a square of zinc, then of copper, then of the moistened cloth, until he has from five to ten pairs or more as he may desire, finishing with a square of copper. Instead of the dilute acid, common salt may be sprinkled on both sides of the cloth after moistening with rain water, and the pile then constructed as before. Also, instead of zinc, strips of sheet iron may be used, although the resultant voltaic pile will not be so strong, in other words, have as much electromotive force.

On a wooden stand, similar to a filter stand with two arms, let the coil of wire hang from the upper arm, and the magnetic needle rest in the middle of the coil on the lower arm. To make the movements of the needle more apparent, remove it from its box, and let it oscillate on a stout sewing needle thrust through a cork and placed, as stated, in the center of the coil.

If now the ends of the coil of wire are so placed that one is under the lowest zinc of the pile, in full contact, while the other end of the coiled wire is pressed flat on the upper or last copper square, the needle in the coil will tend to set itself at right angles to the plane of the coil. By reversing the wires, and placing the end which rested on the copper, now in contact with the lower zinc, etc., then the needle will be reversed also, although still coming to rest at right angles to the plane of the coil of wire, or so-called current of electricity.

One source of interest, connected with this experiment, is the fact that it may aid us in understanding the declination of the needle, which varies as the plane of the electrical current varies. It may also aid in our understanding certain dynamical phenomena, by suggesting that the salt water from the ocean (rendered strong brine by evaporation on reaching heated portions of the earth's crust) may occasionally penetrate deep fissures, and there encounter metals such as native gold, copper, magnetite, etc., besides other more readily oxidizable metals, or those prompt to unite with the chlorine of the salt; thus giving rise to electro-chemical action, and furnishing electromotive force for some seismic phenomena.

Diagram No. 1 is subjoined, to make the above experiment more intelligible.

SECOND EXPERIMENT.

Two bar magnets (costing perhaps 50 cents, and useful for many other interesting experiments) are placed across each other, on a block of wood, as in diagram No. 2, with the S. or unmarked ends of each diverging some 23° respectively to the east and west of the geographical north.

Presenting the small magnetic needle, mentioned in experiment No. 1, while held in the hand successively to the north and south ends of the bar magnets, also to points midway between the two influences, it will be found that, besides the four areas of greatest intensity, near the ends of the magnets, there are curved lines, resembling the agonic, or lines of no variation on our globe, anywhere along which the needle will point to the true north, as indicated in diagram 2. There will also be found a point (resembling the magnetic north pole in Boothia Felix) north of which the magnetic needle will turn its marked end to point due south, while south of that point it will turn its marked end due north. An examination of the phenomena exhibited in this experiment may enable the student to understand the general principles of the declination or variation of the magnetic needle (at many places on our globe) from the geographical north and south; especially when he considers that the same effect may be produced by currents of electricity, if, as in diagram 3, the plane of the main so-called current be successively in A B (solstitial), then in A′ B′ (equatorial), and finally in A″ B″.

The current A B would necessarily, if strong enough, according to Oersted's discovery, and as shown in experiment 1, produce the same effect, on a small needle, which would be effected by the bar magnet that points in the diagram 2½ to the west of the geographical north. The current A′ B′ would produce an effect equivalent to bringing the two bar magnets together; and the current A″ B″ would, in the same manner as if the two bars were made again to diverge, restore the attractive influence (exerted on a small needle) to the region occupied, in diagram 2, by the magnet which points east of north.

RICHARD OWEN.

New Harmony, Ind., December 31, 1884.

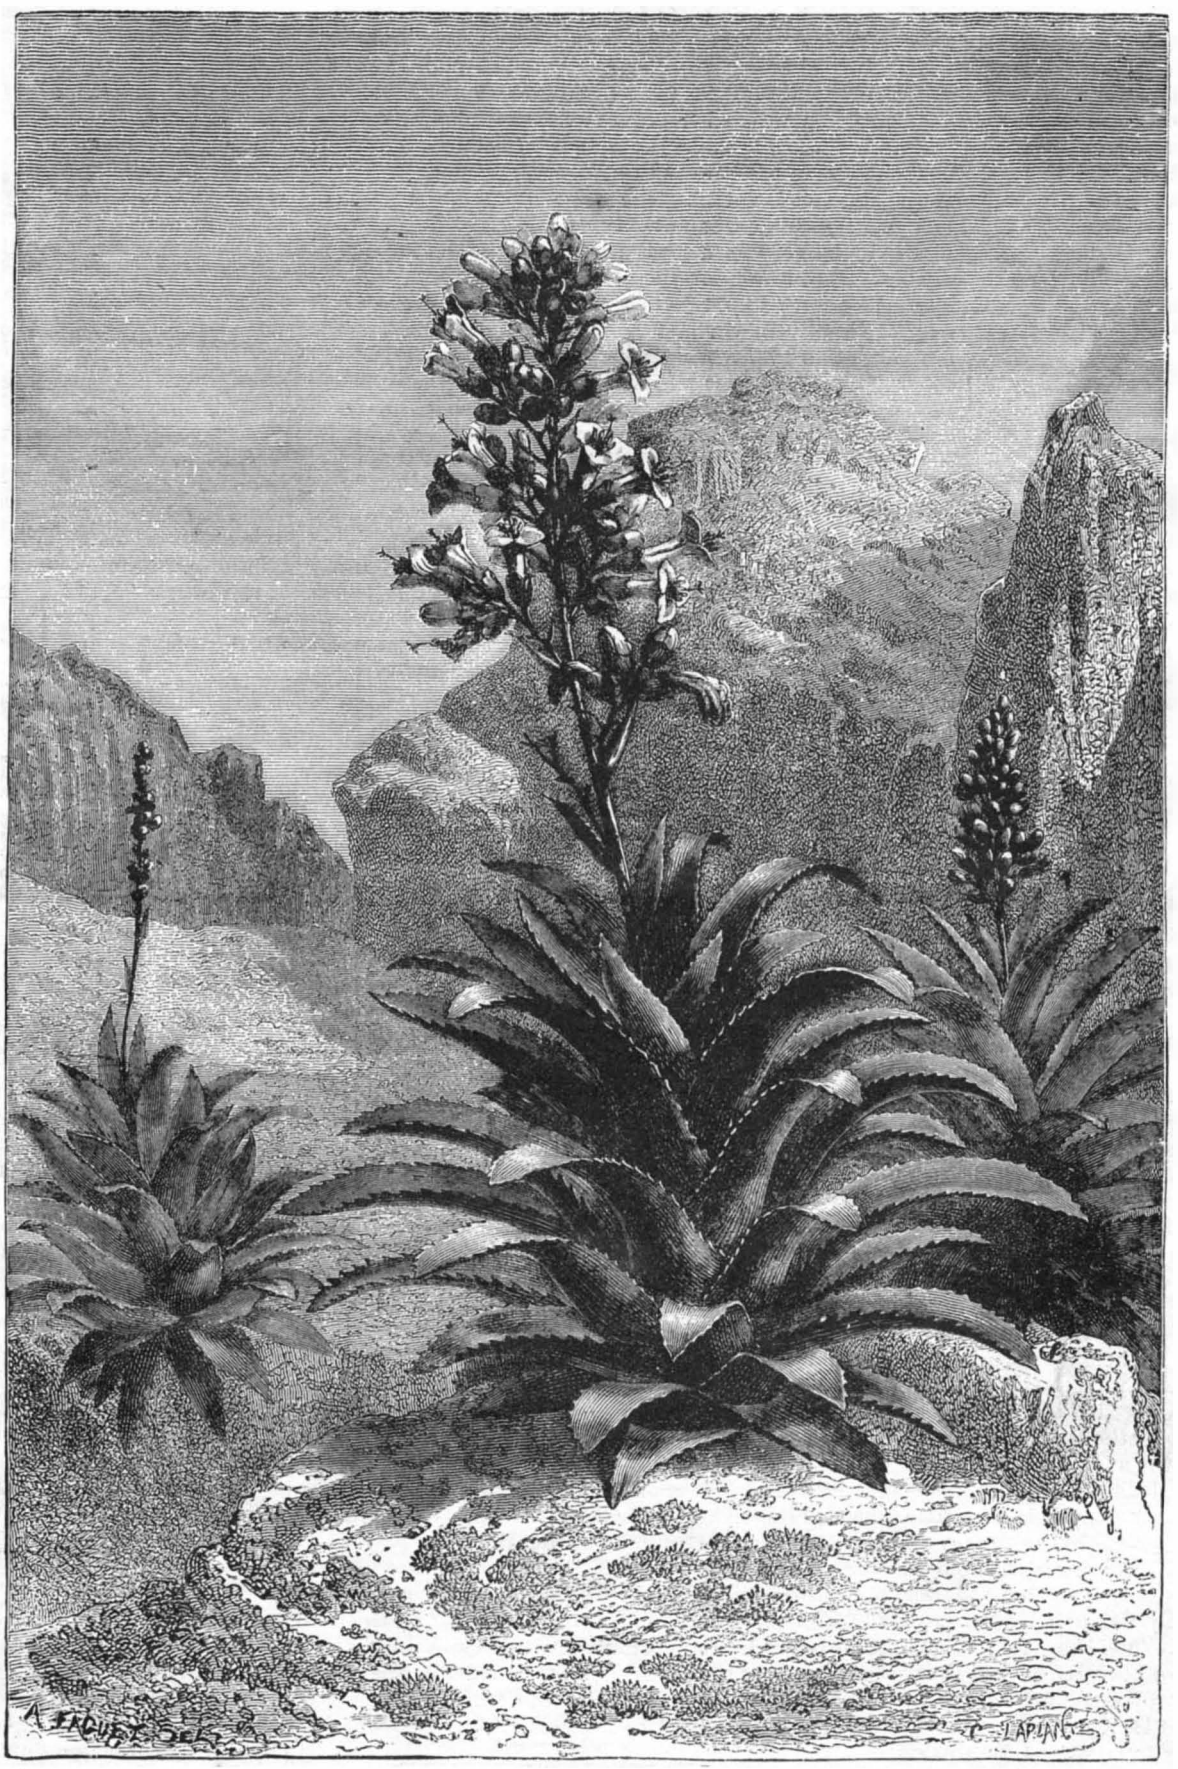

ÆCHMEAS AT HOME.

A Chance for American Bridge Builders.

It will be seen from an advertisement in another column that the Colonial Government of New South Wales, Australia, is about to build a new and splendid steel railway bridge, for which proposals are now invited. The bridge structure will be 2,900 feet long; the foundations are to be sunk 120 feet below the bed of the river, in water 50 feet deep.

ÆCHMEAS.

Everywhere there are evidences that a growing interest is being taken in bromeliaceous plants—an interest that should be encouraged, leading, as it inevitably must, to the introduction into English gardens of a large number of beautiful and eminently useful plants of easy cultivation. England alone among European countries where horticulture prevails has hitherto been practically without Bromeliads as ornamental indoor plants.

Next to Billbergias, the Æchmeas are the most useful among genera comprised in the Bromeliad order, although there are several species of Tillandsia and of Vriesia which are of exceptional beauty. Of the genus Æchmea nearly sixty species are described by Mr. Baker in his recent monograph of the genus, of which about a dozen are known in gardens, both in England and in Continental countries. For the following descriptions of these cultivated species I am largely indebted to Mr. Baker's monograph, prepared from living specimens in the Kew collection, and, therefore, more easily understood by horticulturists than any account could be when based on only herbarium specimens. The habit of Æchmeas is generally vasiform (*i. e.*, the leaves clasp tightly by their bases, so as to form a deep cup or vase) with long, leathery, green, spine margined leaves and central flower scapes. In most of the species the flower scape is clothed with large, bright colored bract-leaves, which are often much more ornamental than the flowers themselves. These latter are much smaller than those of Billbergia, and are red-purple, blue, yellow, or nearly white.

Like all the Bromeliads, Æchmeas are natives of distinctly tropical countries, where, either clothing tree trunks in exposed sunny places, or growing upon the ground, they are often met with in abundance.

In the accompanying illustration a rare and interesting species, viz., Æ. paniculata, is shown growing on the ground in a rocky, moist situation. This species is not known to be in cultivation, nor has it been seen wild for many years. It is one of the handsomest of the genus, and should it be again found in the Peruvian Andes, where it was first discovered by Pavon in 1794, its introduction into English gardens would be most desirable.

Æ. BRACTEATA.—A common plant in the West Indies, growing upon trees in sunny positions. Leaves spiny, with broad, sheathing bases, lorate. Height of plant, 2 feet. Flower scape, 1½ feet long, three parts of which are clothed with bright-red sheathing bracts, 3 inches to 4 inches long, the fourth and upper part bearing a branching panicle of numerous small yellow flowers. A large boat-shaped bract subtends and half envelops the lowermost flower branches. A gorgeously colored plant, owing its attractions chiefly to the brilliant red of the large bracts and the contrast between them and the green foliage and the bright yellow flowers. (Syn., Billbergia exudans.)—*Loddiges' Cabinet*, t. 801.

Æ. DISTICHANTHA.—A Brazilian species, with long ensiform foliage, the base of which is broad and sheathing, margins spiny, back of leaves striped with gray. Height of plant, 2½ feet. Flowers in branching panicles about 3 feet long, much crowded, and subtended by bracts; the latter and pea-like flower-buds bright crimson; flowers when open purplish, almost clear blue on first opening. The flowers are succeeded by berries

© 1885 SCIENTIFIC AMERICAN, INC

of a bright red tipped with purple, which remain fresh and attractive for several weeks. (Syn., Billbergia polystachya.)—*Botanical Magazine*, t. 5,447.

Æ. VEITCHI.—A species from New Granada, introduced by Messrs. Veitch in 1874, by whom it was distributed under the name of Chevalliera Veitchi. A small plant of erect vasiform habit, with dark green, channeled, spiny-edged foliage, 18 inches high. Flowers on a stout scape, which is about as tall as the foliage and erect, crowned by a compact head or cone of pointed bracts and small flowers, bright scarlet in color. —*Botanical Magazine*, t. 6,329.

Æ. MARIÆ REGINÆ.—One of the handsomest of the genus when in flower. In habit it resembles the last described species, differing in the leaves spreading more and in the flower scape being clothed with bright red reflexing bract leaves, which are 4 inches long by 1 inch in width, margined with spines. The flowers are collected in a cone-like head, the calices being white and urn-shaped, through which the small egg-shaped violet colored corolla protrudes. It is a native of Costa Rica, where it is used at the feast of Corpus Christi for the decoration of the altars in the churches. Its local name is Flor de Santa Maria, from which the scientific name has been taken. Introduced by Messrs. B. S. Williams & Co. The richly colored bracts, which spring from a scape covered with white tomentum and crowned with a cone of white and violet, are strikingly attractive, while in the purple-tinted foliage there is sufficient beauty to give this plant a charm even when not in flower. The flowers are usually borne in the spring, about April.—*Botanical Magazine*, t. 6,441.—*The Garden.*

On Some Causes of Earthquakes.

BY RICHARD A. PROCTOR.

It has been noticed that the Spanish earthquakes have been followed by hurricanes, and many are asking how earthquakes can cause hurricanes. "When an earthquake is succeeded by a hurricane," says the *New York Tribune,* "the inference must be that if the occurrence of the windstorm is more than a coincidence, it must be caused by a profound atmospheric change of pressure, such a change as could only be produced probably by an electrical storm of exceeding violence." This I only quote to show how the question has been raised on the American side of the Atlantic. Of electricity, one may say what Laplace said about the theory of special interference of the Almighty as an explanation of unusual phenomena—"*Ca explique beaucoup de choses.*" It does not seem to have been noticed that the Spanish earthquakes followed a remarkable series of Atlantic storms, and that these earthquakes have continued since the great hurricanes occurred which drove the *Tribune* to the all-explaining electrical theory.

If we consider the matter with a little attention, we shall cease to wonder that great atmospheric disturbances excite subterranean activity. The effects of what seem slight changes of atmospheric pressure must in reality be enormous in modifying the pressures underneath the earth's crust. The barometer often ranges half an inch in height without any great hurricanes following. Taking such a change as this, and supposing that over an area as large as the British Isles, and with the seas between them—say, in round numbers, 100,000 square miles—the barometer stands at 29¼ inches, while on either side, over a similar area, the barometric column has an average height of 28¾ inches; let us consider what difference of pressure is involved, and what are the changes produced if the barometric column is raised half an inch over the British area, and lowered by half an inch over the adjacent areas. The pressure of the air on a square inch, when the barometer stands at 30 inches, is nearly 15 pounds, so that a fall of half an inch (one-sixtieth of thirty) means a reduction of pressure by nearly a quarter of a pound to the square inch. (Or, of course, we may leave the air out of the question, and simply weigh half an inch of mercury in height on a square inch base; this will be one 3,456th part of a cubic foot of mercury, and every one knows that a cubic foot of mercury weighs 848 pounds; the 3,456th part of 848 × 16 ounces is $3\frac{25}{27}$ ounces.) Now in a square yard there are 1,296 square inches, and in a square mile about 3,000,000 square yards. Therefore, at a quarter of a pound to the square inch, the pressure on a square mile amounts to 324 times 3,000,000 pounds, and the pressure on 100,000 square miles to no less than 97,200,000,000,000 pounds. This is 1-54 part too great, because the pressure on a square inch is only 53-54 of 4 ounces. Knock off then a 54th part, getting for the actual difference of pressure due to a half inch rise or fall of the mercurial barometer 95,450,000,000,000 pounds, or in round numbers 42,600,000,000 tons. Can it be supposed to be a slight matter if, as frequently happens, such an enormous pressure as this is thrown upon the area of the British Isles and the seas around and between them, in the course of a few hours, while adjacent areas are relieved of a corresponding weight, and then a few hours later the adjacent areas are oppressed by having many thousands of millions of tons extra weight thrown upon them, while the pressure on the British Isles is diminished in the same tremendous degree? We hear it sometimes described as a remarkable thing that great barometric changes are followed by signs of disturbances in British mines; but when we see that only a moderate and normal change of atmospheric pressure means many thousands of millions of tons added to the pressure on the earth's crust in and around Great Britain, or deducted from that pressure, the wonder seems rather to be that changes so slight are produced by pressures so enormous.

Now, the disturbed areas in the hurricanes of last December were very much larger than those I have just considered, and the differences of atmospheric pressure much more remarkable. The areas of diminished pressure were probably not less than 500,000 square miles, and the surrounding areas of increased pressure fully as large, while the range of the barometer was in some cases fully two inches. This would make the weights added to and taken away from the disturbed areas, sometimes very quickly, no less than a thousand billions of tons. Can we wonder if parts of the earth where the crust is relatively weak and unstable should show the effects of such tremendous changes of pressure as these?

But this is not all. The seas respond to the action of mighty hurricanes, not only by being tossed in to waves (which in the open sea are mere risings and fallings of masses of water not themselves carried along), but by being carried in large masses before the winds. Every one knows how a moderate tide is changed into a very high tide by favoring winds, while an expected very high tide becomes a moderate tide when the wind opposes the influx of the water. Along a shore line such as that presented by the Spanish Peninsula toward the west, the water must often be raised two or three feet above its normal level by the action of long continued strong winds from the west. Now, consider one hundred miles of shore line, and the effects of a rise of the sea by only one foot on account of westerly hurricanes, that rise extending only ten miles out to sea. We have, then, a thousand square miles of water one foot deep as the extra pressure upon the crust under that shore line. This gives 27,000 millions of cubic feet of water, each cubic foot weighing 1,000 ounces, or in round numbers about 750 millions of tons of extra water thrown on a shore line only a hundred miles in length. Along 800 miles the additional pressure would be 6,000 millions of tons. This, it will be observed, is very much smaller than the effect due to changes of atmospheric pressure over such an area as the British Isles, but the extra pressure per square mile is nearly twice as great on account of a foot rise in water as on account of a half inch rise of the mercurial barometer. (In the above computation I have taken a cubic foot of water as 1,000 ounces. As a matter of fact, a cubic foot of sea water weighs considerably more, averaging 64½ pounds instead of 62½ pounds—the weight of a cubic foot of fresh water.)

But the rise in the water level due to hurricanes is merely an addition to the rise due to the tides. An extra foot or two due to long continued shoreward winds, added to several feet due to high spring tides, would signify tens of thousands of millions of tons of increased pressure on the Spanish and Portuguese shore line. Moreover, an addition of this enormous weight on one side of a certain definite coast line, while on the other side of this shore line no change at all occurs from this cause, cannot but be a most potent disturbing cause—in a region, too, where the very existence of a shore line indicates irregularity in the structure of the earth's crust beneath.

I take it, then, that we may fairly consider that the external action exerted upon the earth's crust, as the tidal wave sweeps upon a shore line, as winds heap up the seas there, and as atmospheric pressure increases and diminishes—especially during the progress of great storms—must play a most important part in producing subterranean disturbances. At every moment of time millions of millions of tons of matter, in the form of water and air, are being flung hither and thither over the surface of the earth. Can we wonder if, apart from interior causes of disturbance, the crust shows signs of occasional fluctuation?—*Newcastle Weekly Chronicle.*

Proposed Garbage Burning in New York.

To get rid of the ashes and garbage collected in the streets of New York city now requires thirteen dumping stations on the water front and a fleet of scows to carry the refuse to sea, where it is dumped. The quantity so disposed of amounts to about three thousand cubic yards daily, and, in unfavorable conditions of weather, or when those in charge are seeking to shirk their duty, the scows are often dumped so their contents help to fill up the channels of New York harbor. The question of providing a better way of getting rid of this refuse has been a serious one for years, and there is a sum of $50,000 of the regular appropriation which can be expended to this end. It is now proposed, under this provision, to construct furnaces or ovens at or near one of the dumping stations to try and burn up the refuse. The first apparatus will be rather an experimental one, until its economy and the effect of such an incineration factory upon the neighborhood can be determined.

Discovery of the Specific Germ of Diphtheria.

At a recent meeting of the Clinical Society of the New York Post Graduate School, Dr. M. Putnam-Jacobi called attention to the very elaborate and possibly epoch-making investigations, regarding the parasitic nature of diphtheria, which have been made by Loffler.

The result of experiments, conducted with these new bacilli, is summed up by Loffler as follows: They were found in thirteen cases of diphtheria with fibrinous exudation; they lay in the oldest part of the membrane, and penetrated farther toward the tissues than the other bacteria; products of the cultures of them, carried to the twenty-fifth generation, when inoculated under the skin of Guinea pigs and small birds, kill the animals, after the production of a whitish or hæmorrhagic exudation at the point of infection, and extensive subcutaneous œdema. The inner organs remain intact, as do those of diphtheritic patients. Pseudo-membranes were generated by inoculation of the trachea of rabbits, chickens, and pigeons, or of the vagina of Guinea pigs. There are then also evidences of several vascular legions, manifested by hæmorrhagic œdema, by hæmorrhages into lymphatic glands, and effusions into the pleural cavity. The bacilli, he says, have thus the same effects on the animal organism as the diphtheritic virus.

The bacillus which would thus suddenly assume so much of importance to the human race is considered to be identical with the bacillus of diphtheria described by Klebs at last summer's International Medical Congress; and it is a significant fact that two experienced investigators should have thus arrived independently at similar conclusions. The micro-organisms in question are motionless rods, partly straight, partly curved, about the length of the tubercle bacillus but double its breadth, coloring intensely with methyl-blue potassa solution, discoloring again with diluted iodine, except at the two extremities. They are found deep in the tissues, where they are supposed to develop a poison which decays the surrounding tissues, paralyzes the blood vessels, causing congestions, exudations, and finally paralysis of nerve centers and death.—*Medical Record.*

Equilibrium of Forces.

An instrument to illustrate the conditions of equilibrium of three forces acting at a point was lately exhibited at the Physical Society, by Mr. Walter Baily. This instrument consists of a circular disk of soft wood, from the back of which an axle projects. The disk is provided with a graduated circle, and its center marked by the intersection of two fine lines upon a small mirror. Three compound threads, each consisting of two threads connected by a short piece of elastic, are knotted together, the free end of each being fastened to a pin. Two of these pins are stuck into the disk at such a distance from the center that the knotted ends cannot reach the center without stretching each thread, and the remaining pin is then adjusted, so that this condition is fulfilled.

There are now three forces in equilibrium acting at the knot. The angles between their directions are obtained from the readings of the graduated circle where it is crossed by the threads. To determine the magnitude of these forces, the axle of the disk is held horizontally and turned till a thread is vertical, the pin is then removed, a scale pan attached to the end of the thread, and weights added till the knot is brought back to the center. This is repeated with the other threads. It was found possible to show the proportionality of the forces to the lines of the opposite angles with an error not exceeding 1 per cent.

A New Size.

For finishing raw or bleached cotton tissues, particularly for light shirtings, also for starching and dressing warp yarns and skein yarns, instead of the so-called vegetable glue a mixture of potato starch with soda lye is often successfully used; or the soda lye may be replaced by chloride of magnesium. The latter composition is preferable, as the former must be pretty strongly alkaline to preserve its strength. The way of operating is as follows: 50 pounds potato starch are stirred into a sufficient quantity of cold water until all lumps are dissolved, and brought to a boil, when 50 pounds of chloride of magnesium are gradually added under constant stirring, and finally one-half pound hydrochlorie acid. After one hour's boiling, clear lime water is stirred in until the mass is no longer acid. After another hour of boiling, an artificial glue is obtained. This size, which must be perfectly neutral before using it, is very cheap and serviceable in finishing silks and woolens. The goods assume a fine luster, and even in washing the finish is not easily destroyed. Wheat starch, corn starch, etc., may also be used; potato starch, however, has the greatest tendency to form an insoluble combination with chloride of magnesium and lime. This mass is used in cases where gum, dextrin, or paste used to be employed; it is no substitute for animal glue, however.—*Woch.*

© 1885 SCIENTIFIC AMERICAN, INC

ENGINEERING INVENTIONS.

A railroad tie has been patented by Mr. William H. Knowlton, of Pottsville, Pa. This invention relates to a metallic tie of special construction, the form of which may be considerably varied, and which may be rolled in iron, steel, or other malleable metal, or cast.

A pile driver has been patented by Mr. Joseph W. Putnam, of New Orleans, La. It is of that class of pile drivers used for railway building, and therefore mounted on a truck or platform car, being so constructed and arranged that a pile may be readily driven vertically or obliquely, a pivoted platform being combined with hinged leaders connected by a double joint with a triangular iron frame, with various other novel features.

AGRICULTURAL INVENTIONS.

A cultivator has been patented by Messrs. Oliver S. Presbrey and Aaron Nall, of Moriah, N. Y. The teeth are attachable as desired, and are so held to their work by a clamp that they will yield on striking a large stone or other obstacle, and thus prevent breaking; they may also be so arranged in a group as to form a shovel plow.

A wheel cultivator has been patented by Mr. William P. Brown, of Zanesville, O. This invention relates to a former patented invention of the same inventor, in which the plow beams were provided with a resilient flexible joint, and with a lifting spring and draught connection that tended to draw the plows into the ground, and covers a further development of the idea and improvement in the construction.

MISCELLANEOUS INVENTIONS.

A camera stand has been patented by Mr. William H. Lewis, of New York city. This invention relates to improvements in portable tripod stands, and covers certain features of construction of the folding legs and means for retaining them in connection with the top or base that receives the camera.

A combined grain separator and smutter has been patented by Mr. Harry L. Martin, of Lancaster, Pa. This invention covers a novel construction and arrangement of parts for a machine to facilitate the cleaning of wheat and other grain, and promote thoroughness in such cleaning.

A folding barrel has been patented by Mr. George F. Knapp, of St. Louis, Mo. This invention provides means whereby the center of the barrel may be securely held while either end is adapted to be opened to examine the contents, and so the hoops may be locked securely or readily unlocked.

A feeding device for carding machines has been patented by Mr. Ernst Gessner, of Aue, Saxony, Germany. This invention provides a device for taking away or feeding regularly and evenly, from a receptacle or bulk box, wool or other fibrous material, carrying it forward to some desired place, or delivering it to another machine, in even amounts.

A rubber stamp hand printing machine has been patented by Mr. Robert Gaiger, of West Hoboken, N. J. It is made with end plates slotted to receive an inking roller, and connected by a socket bar with one or more spring-supported plungers carrying the stamp, and operated by cams with which are connected slotted arms carrying the inking roller.

A stock feeder has been patented by Mr. Elias R. Harman, of Lincoln, Neb. This invention covers a special construction and arrangement of parts for a stock feeder which shall have a separate trough for each animal, and so that all the troughs can be filled uniformly and rapidly, the troughs being easily kept clean.

A sheep stock has been patented by Mr. Francis M. Swartz, of Jacksontown, O. The construction is such that the weight of the sheep pulls on straps and causes hinged side boards to so close down upon him as to make him hold himself, when necessary, for tagging or other purposes, and so that if he struggles he will only be held the more closely.

A machine for sawing stone has been patented by Mr. Valentine G. Barney, of Charles City, Iowa. This invention covers improvements on a former patented invention of the same inventor, the improvements especially relating to devices for feeding the sand and water mixture upon the block of marble or stone, and devices for mixing the sand and water.

A clip for vehicle axles has been patented by Mr. Edmund N. Hatcher, of Columbus, O. The body or strap portion of the clip is of sheet metal of suitable thickness, and of a size to serve as a hood to exclude water and dirt from under the skein body, and to sustain the collar band against endwise pressure, the bolts for the clip bar being welded to the body, and the device forming a combined hood and clip.

A machine for heading bolts has been patented by Mr. John Stacker, of West Winsted, Conn. It is a bolt making machine with devices for upsetting the wires and forming the head in one heat, and for automatically pressing and pinching together the dies for holding the wire while it is being upset, for separating the dies afterward, and pushing out the completed bolt.

A shield for scarfs has been patented by Mr. Gustave Selowsky, of New York city. The shield has a raised central portion on its inner face, this portion being integral with the body of the shield, and having a button hole with a metal lining, so the shield can be used with buttons with different sized heads, and will adapt itself to the varying distance between the button and the top of the collar band.

A cooking stove has been patented by Mr. Charles F. Hanneman, of Ahnapee, Wis. This invention relates to baking ovens with a vertically adjustable bottom plate, and means for admitting steam into the oven, and provides improved arrangements for raising and lowering the oven plate, and improved construction of the steam generator and discharger, making an oven specially adapted for baking bread in the most perfect manner.

A sealskin sack, dolman, and ulster block has been patented by Messrs. Phillip Weinberg, Louis Clark, Jr., and Egbert Winkler, of New York city. It is made with three or more boards secured to each other at their adjacent edges and attached at their ends to end boards, the adjacent edges of two or more of the boards being tapered, with other features, to facilitate the working of the skin as the edges are successively tacked to the block as the work progresses.

A vehicle shaft has been patented by Messrs. John Scott and Amos S. Scott, of Caln Township, Pa. It provides for three horses being hitched on shafts usually arranged for one horse, two thills having a triple tree pivoted on a cross piece of the same, a single tree on the middle and one on each end of the triple tree, and there being straps passed around the ends of the double tree and through loops on the sides of the thills.

A sectional non-conductive covering for tubes has been patented by Mr. William M. Suhr, of New York city. It is formed of two semi-cylinders of plaster of Paris, asbestos, and sawdust, covered on the outside with a layer of felt, which in turn is covered by a layer of thick paper, the covering being formed in sections and delivered dry and hardened ready for application, so a large quantity of pipe can easily be covered in a short time.

A sand and water pump has been patented by Mr. Valentine G. Barney, of Charles City, Iowa. The pump cylinder has a piston fitting closely at its upper end and loosely at the lower end, the piston having a series of apertures extending from the top to the loosely fitting part, to conduct water through the piston into the cylinder to form a sleeve of water around that part of the piston fitting loosely in the cylinder, to prevent wear of the piston.

A panel raising machine has been patented by Mr. Julius Lobnitz, of Madisonville, O. This invention covers improvements in contrivances for mounting, adjusting, and operating the cutter heads, also improvements in the cutters, in the table, and in the contrivance of the chip breaker and the gauges for controlling the work, the advantages being, among other things, to lessen the power required and make smoother work.

A door or window screen has been patented by Mr. Obadiah G. Newton, of Trenton, Mo. Netting is secured to the inside of the frame, and grooves are formed in the netting, in the bottom of which grooves are apertures through which the flies can escape, triangular blocks being placed in the ends of the grooves and in recesses in the frame, to make it easy for flies to escape from a room, but difficult for them to enter.

A mechanism for converting motion has been patented by Mr. Jethro E. Pencille, of Kendall, Pa. It is a lever mechanism combined with a piston and crank shaft, a short piston movement being made to operate a crank of much greater length, to give increase of leverage and power, the device being especially designed for use in connection with a steam engine, and generally applicable for converting rectilinear into rotary motion.

A boot or shoe has been patented by Mr. John Hansen, of Maryville, Mo. The upper is formed of three layers, the middle one consisting of oil tanned and crimped bladder; the bottom edge of the upper layer is turned outward to form a second welt, on which the usual welt is placed, and then sewed to the upper, and at the same time is sewed to the sole with the upper, the counter being placed on the outside of the back leather, and a back stiffener over it, which extends above the counter and over the side seams.

A coffee and tea pot stand has been patented by Mr. Charlie Gracey, of Summit, Miss. It is made to hold the pot securely, and facilitate tilting it, a basket being pivoted between two standards, with slots in the rear and front of the basket for receiving the spout and the handle of the pot, and with apertured lugs through which a pin can be passed, which is also passed through the pot handle to keep the pot in place, while a lamp can be held in the cross piece of the standards.

A guide setter for sewing machines has been patented by Cornelia T. Freeman, of Elizabeth, N. J. The graduated plate has a pivoted pointer for designating the position of the cloth guide, so in case the work is suspended, and the machine used for other stitching, the guide may be easily and accurately readjusted to resume work; the graduated plate also has a stud on its under surface to enter an orifice in the cloth plate for insuring the proper parallelism of plate and cloth guide with the feed of the machine.

NEW BOOKS AND PUBLICATIONS.

TUNNELING UNDER THE HUDSON RIVER. By S. D. V. Burr. Twenty-seven Plates. John Wiley & Sons, New York. Price $2.50.

Although work on this great enterprise has been suspended since July 20, 1883, there are probably as many who are confident of the final success of the Hudson River tunnel (to connect New York and Jersey cities) as there were, in all the early years of the undertaking, that the East River Bridge would be completed. There have been, altogether, some 2,500 feet of the tunnel actually built, at a cost of about $1,100,000, and, at the rate at which work was being pushed at the time of suspending operations, the whole tunnel could be completed, barring any further accident, in two and a half years. Just what has been done, with a description of the obstacles encountered, the experience gained, the success achieved, and the plans finally adopted for the most rapid and economical working, are lucidly described by Mr. Burr, while numerous plates of working drawings are given, which add to the value of the volume. The author's opportunities for thorough inspection were favorable from almost the very beginning of the enterprise. The general plans according to which the tunnel has thus far been built are new, and in this volume engineers have the opportunity of thoroughly understanding them.

Business and Personal.

The charge for Insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

Experienced designer and builder—18 years on watches and watch machinery—desires situation after March first. References or samples. Address G. S. Heath, Lock Box 61, Thomaston, Conn.

Models, Mills, Gauges, and Reamers in any quantity. Interchangeable Tool Co., 313 North 2d Street, Brooklyn, N. Y.

Manufacturers supplied with Pumps for every service by Valley Machine Works, Easthampton, Mass.

Any person wishing to sell the back volumes of SCIENTIFIC AMERICAN, complete, beginning with 1845, or the volumes from that year to 1862, may find a customer by addressing Alpha, Box 773, New York.

Patent for sale cheap. Described on p. 83. F. Bone, Lebanon, O.

Small Size Universal Milling Machine. Price, $700; f. o. b. Best in the market. Send for circular. Brown & Sharpe Mfg. Co., Box 469, Providence, R. I.

Upright Boring Mills, 6 and 8 foot swing. New designs. Pond Machine Tool Co., Worcester, Mass.

Scarfs.—Any size or length made on one machine. Lamb Knitting Machine Co., Chicopee Falls, Mass.

All Scientific Books cheap. School of Electricity, N.Y.

Blake's Patent Belt Studs are the strongest and best fastening for Leather or Rubber Belts. Greene, Tweed & Co., N. Y.

Air Compressors, Rock Drills. Jas. Clayton, B'klyn, N.Y.

A lot of new Chucks of all sizes, slightly damaged, at half price. A. F. Cushman, Hartford, Ct.

The Best Upright Hammers run by belt are made by W. P. Duncan & Co., Bellefonte, Penna.

Iron Planer, Lathe, Drill, and other machine tools of modern design. New Haven Mfg. Co., New Haven, Conn.

The leading Non-conducting Covering for Boilers, Pipes, etc., is Wm. Berkefeld's Fossil Meal Composition; ¾ inch thickness radiates less heat than any other covering does with two inches. Sold in dry state by the pound. Fossil Meal Co., 48 Cedar St., N. Y.

Machinists.—Spring Calipers and Dividers, with patent washers, made by J. Stevens & Co., Box 28, Chicopee Falls, Mass.

Try our Corundum and Emery Wheels for rapid cutting. Vitrified Wheel Co., 38 Elm St., Westfield, Mass.

The Providence Steam Engine Co., of Providence, R. I., are the sole builders of "The Improved Greene Engine."

Every variety of Rubber Belting, Hose, Packing, Gaskets, Springs, Tubing, Rubber Covered Rollers, Deckle Straps, Printers' Blankets, manufactured by Boston Belting Co., 226 Devonshire St., Boston, and 70 Reade St., New York.

Experimental Machinery Perfected, Machinery Patterns, Light Forgings, etc. Tolhurst Machine Works, Troy, N. Y.

Whistles, Injectors, Damper Regulators; guaranteed. Special C. O. D. prices. A. G. Brooks, 261 N. 3d St., Phila.

Brush Electric Arc Lights and Storage Batteries. Twenty thousand Arc Lights already sold. Our largest machine gives 65 Arc Lights with 45 horse power. Our Storage Battery is the only practical one in the market. Brush Electric Co., Cleveland, O.

The Cyclone Steam Flue Cleaner on 30 days' trial to reliable parties. Crescent Mfg. Co. Cleveland, O.

For Steam and Power Pumping Machinery of Single and Duplex Pattern, embracing boiler feed, fire and low pressure pumps, independent condensing outfits, vacuum, hydraulic, artesian, and deep well pumps, air compressers, address Geo. F. Blake Mfg. Co., 44 Washington, St., Boston; 97 Liberty St., N. Y. Send for catalogue.

Stationary, Marine, Portable, and Locomotive Boilers a specialty. Lake Erie Boiler Works, Buffalo, N. Y.

Wanted.—Patented articles or machinery to manufacture and introduce. Lexington Mfg. Co., Lexington, Ky.

"How to Keep Boilers Clean." Book sent *free* by James F. Hotchkiss, 86 John St., New York.

Mills, Engines, and Boilers for all purposes and of every description. Send for circulars. Newell Universal Mill Co., 10 Barclay Street, N. Y.

Presses & Dies. Ferracute Mach. Co., Bridgeton, N. J.

For Power & Economy, Alcott's Turbine, Mt. Holly, N.J

Steam Boilers, Rotary Bleachers, Wrought Iron Turn Tables, Plate Iron Work. Tippett & Wood, Easton, Pa.

Send for Monthly Machinery List
to the George Place Machinery Company,
121 Chambers and 103 Reade Streets, New York.

If an invention has not been patented in the United States for more than one year, it may still be patented in Canada. Cost for Canadian patent, $40. Various other foreign patents may also be obtained. For instructions address Munn & Co., SCIENTIFIC AMERICAN patent agency, 361 Broadway, New York.

Guild & Garrison's Steam Pump Works, Brooklyn, N. Y. Steam Pumping Machinery of every description. Send for catalogue.

Hydraulic, Piston, Valve Rod, and all kinds of Steam and Water Packing. Greene, Tweed & Co., 118 Chambers St., N. Y.

Nickel Plating.—Sole manufacturers cast nickel anodes, pure nickel salts, polishing compositions, etc. Complete outfit for plating, etc. Hanson & Van Winkle, Newark, N. J., and 92 and 94 Liberty, St., New York.

Supplement Catalogue.—Persons in pursuit of information of any special engineering, mechanical, or scientific subject, can have catalogue of contents of the SCIENTIFIC AMERICAN SUPPLEMENT sent to them free. The SUPPLEMENT contains lengthy articles embracing the whole range of engineering, mechanics, and physical science. Address Munn & Co., Publishers, New York.

Machinery for Light Manufacturing, on hand and built to order. E. E. Garvin & Co., 139 Center St., N. Y.

Drop Forgings, Billings & Spencer Co., Hartford, Conn.

Munson's Improved Portable Mills, Utica, N. Y.

Mineral Lands Prospected, Artesian Wells Bored, by Pa. Diamond Drill Co. Box 423, Pottsville, Pa. See p. 62.

Catalogue of Books, 128 pages, for Engineers and Electricians, sent free. E. & F. N. Spon, 35 Murray Street, N. Y.

We are sole manufacturers of the Fibrous Asbestos Removable Pipe and Boiler Coverings. We make pure asbestos goods of all kinds. The Chalmers-Spence Co., 419 East 8th Street, New York.

Clark's Rubber Wheels. See adv., page 78.

Steam Hammers, Improved Hydraulic Jacks, and Tube Expanders. R. Dudgeon, 24 Columbia St., New York.

Emerson's ☞ Book of Saws free. Reduced prices for 1885. 50,000 Sawyers and Lumbermen. Address Emerson, Smith & Co., Limited, Beaver Falls, Pa.

Hoisting Engines, Friction Clutch Pulleys, Cut-off Couplings. D. Frisbie & Co., Philadelphia, Pa.

Barrel, Keg, Hogshead, Stave Mach'y. See adv. p. 78.

Lane's Patent Anti-friction Steel Door Hanger and Track. Lane Bros., Box 276, Poughkeepsie, N. Y.

Blacksmith Drilling Machines for ⅛ to ¾ inch diameter, $22.50. Pratt & Whitney Co., Hartford, Ct.

Catechism of the Locomotive, 625 pages, 250 engravings. Most accurate, complete, and easily understood book on the Locomotive. Price $2.50. Send for catalogue of railroad books. The Railroad Gazette, 73 B'way, N. Y.

For best low price Planer and Matcher, and latest improved Sash, Door, and Blind Machinery, send for catalogue to Rowley & Hermance, Williamsport, Pa.

C. B. Rogers & Co., Norwich, Conn., Wood Working Machinery of every kind. See adv., page 78.

The Porter-Allen High Speed Steam Engine. Southwark Foundry & Mach. Co., 430 Washington Ave., Phil. Pa.

Stephens' Pat. Bench Vises and Planer Chucks. See adv., p. 76.

Young Men! Read This!

The VOLTAIC BELT Co., of Marshall, Mich., offer to send their celebrated ELECTRO-VOLTAIC BELT and other ELECTRIC APPLIANCES on trial for thirty days, to men (young or old) afflicted with nervous debility, loss of vitality and manhood, and all kindred troubles. Also for rheumatism, neuralgia, paralysis, and many other diseases. Complete restoration to health, vigor, and manhood guaranteed. No risk is incurred, as thirty days' trial is allowed. Write them at once for illustrated pamphlet free.

Split Pulleys at low prices, and of same strength and appearance as Whole Pulleys. Yocom & Son's Shafting Works, Drinker St., Philadelphia, Pa.

Notes & Queries

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters, or no attention will be paid thereto. This is for our information, and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all, either by letter or in this department, each must take his turn.

Special Information requests on matters of personal rather than general interest, and requests for **Prompt Answers by Letter,** should be accompanied with remittance of $1 to $5, according to the subject, as we cannot be expected to perform such service without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Minerals sent for examination should be distinctly marked or labeled.

(1) K. A. R. asks how to tin or galvanize small iron castings. A. Clean the iron castings (or forgings) from scale, sand, and other adherent coating; dip them in a bath of muriatic acid and water—one part by measure of acid and four of water—and immerse them in a bath of melted zinc (spelter); no tin is required. Take them out, and violently shake off the dripping metal. Some use a dip of powdered resin after the acid bath, and before the immersion in the liquid zinc. Block tin melted may be used in the same way as zinc, if you prefer it to zinc.

(2) A. G. H.—The stars twinkle when the atmosphere is disturbed by unequal temperature or the commotion of strata of the atmosphere having different temperatures. You may see a fair illustration of the reality of this phenomenon by looking at a distan light across a hot stove. The twinkle of a star to the eye is the same as the dancing of the star in the field of the telescope, which Newton failed to mention. Stars have their hardest dances in the largest telescopes, when the condition of the atmosphere is favorable. Planets of large visual size do not appear to twinkle, but their telescopic definition is destroyed from the same cause that makes the stars twinkle to the eye or dance in the telescope.

(3) F. L. asks for information: 1. As to the process of canning fruit without being boiled, such as we see in the large groceries put up in large bottles? A. The processes of canning fruit when not dried all involve some sort of heating or partial cooking. The canners claim that there is nothing peculiar about it. With experience there comes a certain amount of skill which cannot be imparted by furnishing receipts. 2. The method of ironing collars and cuffs in the Chinese style? A. The Chinese method of laundrying is given in answer to query 2 on page 330 of SCIENTIFIC AMERICAN, for May 26, 1883. 3. The composition of the baking powders by parts, that is, their ingredients? A. Take:

Powdered cream tartar	30 oz.
Soda bicarbonate	15 oz.
Flour	5 oz.

All well dried; mix thoroughly, and keep dry.

(4) W. S. asks if there was any substance or composition known which would form a glaze for pottery or baked earth, vitrifying at a low heat (between boiling water and melting lead). A. Perhaps the following will answer: Take 100 parts washed sand, 80 parts purified potash, 10 of niter, and 20 of slaked lime, all well mixed, and heated in a black lead crucible, in a reverberatory furnace, till the mass flows into a clear glass. The goods are to be slightly burnt, dipped in water, and sprinkled with the powder.

(5) W. C. M. asks: 1. Whether or not ordinary bricks expand when saturated with water; and if so, the most simple means of ascertaining the fact and demonstrating the same to an unbeliever? A.

© 1885 SCIENTIFIC AMERICAN, INC

Bricks probably do expand very slightly under water as an effect of capillary attraction, but in such an infinitesimal degree that it would be difficult to show without very delicate measurements. 2. Where he can ascertain as to the action of moisture in its effect upon solids as an expansive force? A. We do not know of any special treatise on this subject exclusively, but any general work on physics has more or less bearing on the matter.

(6) E. C. C. writes: In the SCIENTIFIC AMERICAN of Dec. 6 is an article entitled "A Chance for American Inventors," with regard to cleaning the henequin fiber. There are a good many inquiries as to what henequin is; the nearest we can place it is from Hena. Will you say what it is, what it is like, its growth, etc., that will be of benefit to inventors, and perhaps growers of the plant? A. You are right as to origin of word; it is a species of hemp grown principally in Yucatan, and there called Sisal grass, though it is also a native of Mexico, Honduras, and Central America, and has been introduced in Florida. There are two varieties in Yucatan, the *yashgui*, of better quality, and the *sacgui*, giving larger yield. It is easily cultivated on dry and stony land. The annual yield of clean fiber is about a ton to an acre. The native mode of preparing the fiber is to scrape away the pulp from each side of the leaf with triangular strip of hard wood, then washing and sun drying, a very slow and toilsome process.

(7) M. A. M. asks for the form of application of steam in process of feather curling, also what foreign substance, if any, is used in steaming to keep them curled for a long time? A. The process of curling feathers consists in heating them slightly before the fire, then stroking them with the back of a knife, and they will curl. The steaming is for the purpose of cleansing the feathers, as it is necessary to first soften them; and we do not know of any substance used for holding the curl on good feathers, though many substances might be suggested for cheap ones.

(8) E. W. writes: A locomotive has six drive wheels connected to piston on middle or center wheel. Is there more pressure on the rail under center wheels by means of piston pushing down and lifting up while in motion? Or is the pressure all alike on six drive wheels? The wheels all connected together by rods. A. The push and pull of the piston rod is compensated by being attached to the frame of the engine. It lifts the frame when pushing down on the wheel, and *vice versa*, making a slight tendency to rock the engine. There is no perceptible variation in the pressure from the action of the rod. All the wheels bear as near alike as the set of the springs and evenness of track will allow.

(9) B. W. G. asks how to fix an iron pump that has burst in the late cold snap; the crack is 12 or 14 inches long. A new head would cost about $12, so I wish to mend the old one. A. If only a split cylinder, it may be hooped with iron bands bolted on. Otherwise we could not advise without seeing the pump.

(10) P. V. S. asks how the large ocean steamers, for instance such as steamer Ems, of North German Lloyd, running between Bremen and New York, obtain during the passage their supply of water for the use of their boilers? A. Sea-going steamers use salt water. Many have surface condensers arranged for saving the steam used, by condensing and returning it to the boilers as fresh water.

(11) S. K. E. asks the value of the half dollar of 1824. A. The coin is worth 50 cents. 2. If there is any method by which to transfer the ink from small newspaper cuts, etc., to glass slides for magic lanterns? A. We presume you refer to the following, which was devised by Leclerc of Paris: Glass which is thinly silvered is coated with a very thin coat of asphalt. This is done by dissolving Syrian asphalt, such as is sold by photographic dealers, in benzine, and coating the glass with the solution without exposure to direct sunlight. A photographic cliche is laid upon the asphalt coat when dry, and the whole then exposed to the rays of the sun, which will render the asphalt, wherever the latter is exposed, insoluble. The protected asphalt coating is then washed away with benzine, and the silver coating below it with nitric acid, while the drawing or pattern will appear in silvered lines and figures upon the glass.

(12) L. L. F.—The melting point of lard is generally determined by melting it and placing a thermometer in the liquid; a reading is made when the first signs of crystallization appear. The acid test differs, and is determined by titering a given quantity of lard dissolved in alcohol with a standard solution of caustic alkali.

(13) G. H. H. asks: What chemicals or liquids can be put into quart bottle or small box to reduce the temperature in said box say to freezing or nearly so at any season of the year, and would last the longest without renewing or much attention? A. We do not know of any permanent freezing mixture. An excellent compound consists of equal parts water and ammonium nitrate. In the SCIENTIFIC AMERICAN for June 21, 1884, a table of freezing mixtures is given in answer to query 4.

(14) A. B.—To make candied banana the fruit is prepared separately, and allowed to absorb as much sugar as possible from a strong sugar sirup, then it is dipped from time to time into a concentrated sirup made from crystallized sugar, and afterward dried on wire screen. The dipping is continued until crystallization is satisfactory.

(15) W. F. S. asks (1) the number of horse power a 4x4 engine is rated at 300 revolutions. A. Your engine, with 50 pounds mean pressure upon the piston, or from 65 to 75 pounds in boiler, at the rate stated, will be equal to 4 horse power. 2. What size boat and size and pitch of propeller is it adapted for? A. Size of boat 25 feet long, propeller 20 inches, with 4 feet pitch. 3. Will a coil boiler pass inspection, and where can I get estimate of cost, or learn how they must be constructed? A. A coil boiler will pass inspection if properly constructed. Write some of our advertisers for estimates.

(16) W. L.—The motion given to one jumping from a moving car involves no paradox. The conditions are the same as in making a sudden stop when running, viz., bracing the body, and inclining it from the direction of motion. In the case of the rapidity of ascent and descent of a bullet fired into the air, the friction of the air constantly holds a retarding influence upon its velocity, both while ascending and descending, while gravity only retards its ascent and accelerates its descent. The friction of the air upon the bullet is in proportion to its velocity, no matter in which direction it moves.

(17) F. G. C. writes: 1. At a temperature of 50° Fahr. *below* zero, what would be the length of an iron rod which at 100° *above* zero is exactly 100 ft. long? Of a brass rod? Of a copper rod? A. A bar 100 ft. long from +100° to −50° will contract:

Iron.....1·18 in. and be 99 ft. 10·82 in. long,
Brass.....1·87 in. and be 99 ft. 10·13 in. long.
Copper.....1·72 in. and be 99 ft. 10·28 in. long.

2. Is the decrease in length the same for every degree of decrease in thermometer? A. With copper and iron the contraction is supposed to slightly increase with the fall of temperature in the lower part of the scale, or below 212°. 3. What are the alloys, what *per cent*, and how is per cent determined (*i. e.*, by weight, bulk, or value), and of what value are the alloys in U. S. coins? A. Alloys are made by weight. The standard for gold and silver coin is 900 parts pure metal and 100 parts alloy in 1,000 parts by weight. 4. Why does the frost on window panes, no matter how many in a sash, always melt at the *top* first? A. Because the room is warmest at the top. 5. What causes the different forms of crystallization on windows, very large designs bordering on very small ones? A. Because of the different conditions of intensity of cold and moisture of the air of the room. 6. Does *dry* wood shrink or expand by heat and cold? A. Yes; almost infinitesimally. 7. Why is it that in heating a large room (40 x 60 x 20, with furnace), I find it quite difficult—almost impossible—to raise the thermometer above 50° Fahr., while to raise it from 0° to 50° is comparatively easy? A. Because from 0° to 50° is nearer the outside temperature than any required temperature above 50°. 8. Is solid ice affected by cold or *heat (not above 25° Fahr.)*, and if so, in what manner? A. Ice expands and contracts by change of temperature in the same manner as other solid bodies. 9. What is the heaviest substance known, and what is its specific gravity? A. Platinum; specific gravity, 21·5; hammered, 22.

(18) O. S. asks for a compound (metals preferred) that will melt under 150 degrees Fahrenheit.

A. Tin. .....12 parts.
Lead.....25 "
Bismuth.....50 "
Cadmium.....13 "
Mercury.....10 "

(19) J. C. B.—There is no difference in the length of the American and British standard yard.

(20) A. F. A.—French chalk has been used to draw figures on sheets of mica, and then when breathed on will show the drawing white; when the mica is dry it cannot be seen. The same process is probably applicable to slate.

(21) A. A. B.—The etching on railroad lanterns is probably done by the sand blast process. The ordinary process of etching on glass is described in SCIENTIFIC AMERICAN SUPPLEMENT, No. 313.

(22) P. A. S.—A very fair imitation of cider may be produced by using the following receipt: 25 gallons soft water, 2 pounds tartaric acid, 25 pounds New Orleans sugar, 1 pint yeast. Put all the ingredients into a clean cask, and stir them up well after standing twenty-four hours with the bung out. Then bung the cask up tight, add 3 gallons spirits, and let it stand forty-eight hours, after which time it will be ready for use.

(23) A. C. S. asks how many metals there are that have a specific gravity more than that of gold, and their names and specific gravities. A. Gold has a specific gravity of 19·3, iridium 22·4, osmium 22·5, platinum 21·5.

(24) C. W.—Swansea in South Wales, and Cornwall in England, are the principal centers for reducing the low grade ores of copper, silver, and gold. The addresses of the various works may be obtained through our Consul at Liverpool or London.

(25) J. H. E. asks: Which size coal, used in a hot air furnace for heating houses, will give the most heat, same number of pounds being used—"furnace," "egg," or "nut?" Why? Which is the most economical? A. We do not know that there is any more heat in a ton of coal whether it be the furnace, egg, or nut. When there is no difference in price, convenience of attendance upon the furnace is a consideration in favor of the larger coal. The frequency of firing and waste through the grate of unconsumed nut coal with its larger percentage of dust is against its economy for heating furnaces. Which size is best in each instance depends on the furnace and the work it is expected to do.

(26) R. M. F.—Chloride of antimony has been much used for browning gun barrels. Mix with olive oil to a thin creamy consistency. The barrel to be made perfectly clean and free from rust spots or grease, then covered evenly with the mixture, and left until the proper shade is produced, when it may be washed with common soda and water, and rubbed smooth with boiled linseed oil.

(27) R. B. P. writes: I have a large amount of muslin that has been used with stencil colors for review exercises. Though the paints are water colors, they will not wash off. How can they be removed from the muslin? A. First wash with alcohol, then with dilute oxalic acid, followed by ammonia; this will suffice to remove all coloring material. A chlorinated solution of soda likewise will be found satisfactory for removing the coloring.

(28) C. S. C. writes: I have a small side wheel steamer, 40 feet long, 9 feet wide, 3 feet deep, flat bottom, sharp at each end, runs on 14 inches of water. What should be the diameter of wheel and what width bucket, and how many runs per minute? How deep should bucket dip? The length of bucket is 2 feet; engine, 8 horse power. What speed will she make? A. Wheels 9 feet diameter, 3 feet bucket, dip 1 foot at light draught. We could not predict the speed with any certainty; 5 or 6 miles per hour may be accomplished.

(29) E. L. H.—Metallic silver with a frosted surface is the nearest approach to a pure white substance that is a good conductor of electricity, what you require, that we know of. The bisulphate of mercury battery and the chloride of silver battery are both powerful and constant. The bichromate of potash battery is powerful, but not so constant. For light currents the Trouve battery, which is practically dry, is very successful. There is no metal that will prevent the formation of a spark in the commutator of an electric motor. The spark depends in a great measure upon the construction of the motor. In motors made on the principle of the continuous dynamo, there is very little spark.

(30) S. S. W.—Your inquiry has already been answered in the SCIENTIFIC AMERICAN, but, in addition to the reply then given, we would say that a common method of removing paint and varnish from wood is to soften it by means of a flame (gas or alcohol), or by means of a hot iron held near, but not in contact with, the wood. When the paint is thus softened, it may be readily removed from the surface of the wood by means of a broad, thin scraper.

(31) J. G. H. asks: What speed should a 7 inch emery wheel have while truing it with a diamond? A. Thirty to 50 revolutions per minute for a 7 inch wheel.

(32) J. T. asks: 1. Has electricity any difference of action (conductibility excepted) upon wool, jute, and linen? A. We believe not. 2. Has anything been published upon it? If so, where can it be procured? A. See any recent works upon electricity or physics.

(33) H. C. R. writes: I wish to make an iron die to stamp sheet brass. Can I make a deposit of iron on a plaster form coated with plumbago, and then back the deposit up with brass or other metal? If it can be done, what kind of battery should I use, and how should I make the solution? A. We think you will be unable to make iron dies in the manner proposed.

(34) G. F. H.—We think that there is very little difference between the dynamos of lamps of prominent makers. We advise you to write to all of the manufacturers and get their descriptive circulars.

(35) R. L. G.—The opaque lantern or wonder camera is simply an ordinary magic lantern adapted to use ordinary pictures and solid objects instead of the transparent views. The light is concentrated upon the face of the object, and the image is projected by reflected light instead of transmitted light. You will find description of the opaque lantern or wonder camera, and on making inks, in back numbers of the SUPPLEMENT.

(36) C. E. B. asks: 1. What composes the requirements of a locksmith, and what is the opening for one learning the trade? A. Locksmiths, nowadays, are not regarded as first class mechanics. Years ago, when intricate locks and keys were made by locksmiths, it was regarded as a very important and difficult trade; but now a locksmith is required to do little else than to repair broken locks or to fit ordinary keys. 2. How much of No. 16 cotton covered wire does it require to wind the magnets of dynamo machine described in SUPPLEMENT, No. 161? A. From two to three pounds. 3. How must I change the commutator to make a motor of it? A. If the commutator is arranged properly for a dynamo, it ought not to require changing when the machine is used as a motor. 4. Must there be a battery used to excite the magnets in starting machine? A. Generally no; but if the iron of the field magnet is absolutely devoid of polarity, the magnet must be either placed in the magnetic meridian or it must be excited by means of a battery.

(37) E. B.—We think that you will experience much difficulty in covering your boat frame with galvanized iron. Life boats are made of galvanized iron, but the strakes are pressed to shape with a powerful hydraulic press. We think you would do better with wood planking. Linseed oil is preferred for both framing and planking. Upon this you may paint any desired color, using boiled linseed oil only.

(38) G. T. E.—Brass springs must be made of what is called spring brass. If made of annealed brass, they cannot be hardened except by hammering.

(39) C. & C. write: If an engine is run 400 revolutions with 40 pounds pressure, will you have more power by running 600 revolutions with the same pressure? A. Theoretically, yes, provided the boiler will supply steam in proportion. To do this requires more fuel, that costs more money. As these high speeds are impracticable we do not recommend them.

(40) W. M. C.—No one knows whether electricity occupies space, in the sense that physical objects do.

(41) F. N. D. asks if a cast iron gas main will rust on the inside, when it is in constant use for supplying gas, if water that is made to absorb all the salt that it will hold is run through it? The water does not stay in pipe, but runs off at once. A. We think that the application of salt water in the manner proposed would not secure any beneficial result.

(42) J. F. C.—Balloons other than silk may be made of very fine muslin or paper for experimental purposes. Hydrogen gas will lift about 2 pounds to the cubic yard.

(43) G. H. W. writes: I have made an electric machine like the one described in SUPPLEMENT, No. 161; it works well as an electric machine, but I want to make a motor of it. I wound the armature with No. 20 wire instead of 18, because I had the wire. Will you please tell me how I can make a motor of it? I have changed the commutator and tried every way, used one battery to charge the field magnets and three on the armature, but no good. Would it be better to wind the armature with finer wire, if so, what number? A. Your armature would be better if wound with coarser wire, say No. 16, for a motor. You should connect up your armature and field magnet so that the battery current passes through the armature and field magnet in series; then a slight change in the adjustment of the commutator would probably enable you to succeed when using your dynamo as a motor. The commutator may be adjusted so that the dynamo will need no change when used as a motor.

(44) H. M. N. asks: What is the easiest method of polishing irregular curved surfaces of castings? How are copper or brass faucets, pipes, etc., polished? A. This kind of polishing is usually done by means of polishing belts and cloth wheels supplied with suitable polishing powder.

(45) Test for oleomargarine.—In the issue of January 31, answer to correspondents, No. 73, told how to tell oleomargarine from butter. The way is not handy to use as a test. Try this simple and infallible test: Stir a little—half a teaspoonful or less—of the suspected butter in enough sulphuric ether to dissolve it. By the time the grease is dissolved the ether will have been evaporated, and the residuum will show, to smell or taste, whether it is butter, lard, or tallow. Five cents' worth of ether will suffice for several tests.

(46) E. F. K.—The running of the feed pipe through the fire chamber to the back end of the boiler is dangerous. When the injector is not running, the intense heat of the fire chamber generates steam in the pipe, forcing the water out and into the boiler, and allows the pipe to become red hot. In a short time it will split or burn out, and let the water out of the boiler when you can least afford it. Better run the pipe outside the setting and through the back wall, or if you wish to heat the water, make a small coil and place in the smoke flue, so as to take up some of the waste heat of the chimney. Put a check valve next to the boiler feeding at the front.

(47) J. F. S. asks (1) for some reference to published authority, and where obtainable, upon electroplating, such as will enable a good mechanic having some practical knowledge of electricity, chemistry, and batteries to make such batteries, tanks, solutions, etc., as are required in the business of electro-plating with gold, silver, and nickel? A. You will find considerable information given on this subject in SCIENTIFIC AMERICAN SUPPLEMENT, No. 310, under the title of "Electro-Metallurgy." Among the works one of the most recent and complete is "Galvanoplastic Manipulations," by W. H. Wahl. Price $7.50. 2. Is molybdate of ammonia the simplest and best test for sulphur? A. Molybdate of ammonium is generally used as a test for phosphorus. For sulphur, treat the solution with a little nitric acid, heat, and add barium chloride; a white pulverulent precipitate of barium sulphate is indicative of the presence of sulphur.

(48) L. S. asks if an engine 2x3 is suitable for running a canoe 14 feet 8 inches by 27 inches beam; how much power would such engine develop at 40 pounds steam? Would a boiler 12 inches diameter and 13 inches high, made of three-sixteenths inch galvanized iron with heavy copper heads and heated with gasoline, give enough steam for above engine, and would boiler be strong enough? If above dimensions are wrong, please set me right, also as to the make of a light and strong boiler. What size 3 blade screw is best? Also what would speed of canoe be? A. At 200 revolutions per minute, your engine would develop one-third horse power. Your proposed boiler is not large enough. Should be 14 inches diameter, 20 inches high, with twenty-five 1 inch tubes, with the outside of the shell covered into the heating chamber. Better make the boiler of plain iron three-sixteenths inch shell, ¼ inch heads. Tubes expanded in heads. A 12 inch screw will be as large as can be used to advantage. Knowing nothing of the construction or weight of canoe, we can only estimate speed at 5 miles per hour.

(49) C. G. B.—The sudden turning on of steam at high pressure to heating pipes is dangerous to the pipes and fittings. The pipes always contain more or less water when cold, and the sudden accumulation of water of condensation from the inrushing steam upon the cold pipes accumulates water that cannot be instantly drained away; and as water is comparatively a solid body, it dashes along the pipes under the force of the incoming steam, producing concussions like hammering upon the pipes, and in its confined condition produces great strain upon the pipe and fittings, often bursting forth.

(50) W. B. M.—You may return the water of condensation to the boiler under the conditions that you name. You will need 1¼ inch pipe from boiler to near the radiators, and distribute to radiators with 1 inch pipe. The return to boiler may be 1 inch pipe, with ¾ inch branches to each radiator. Only ordinary valves upon the radiators, with a check valve near boiler. If you have air valves upon each radiator and a small blow-out valve near the boiler, so as to get rid of the air in the return pipe when you turn steam into the heating pipes, you will need only one precaution in its management, viz., always remember that the water returns by gravity only, which makes it necessary to keep the steam at the full boiler pressure upon the radiators, otherwise the water will back up into the radiators until the proper gravitating balance is obtained. No throttling of the steam at the boiler valve will succeed with a gravity system.

(51) S. H. asks (1) how to apply loadstone to steel to give it the strongest attractive power. A. You can neither impart to a strong magnet a strong attractive power by the application of loadstone nor increase the power of the loadstone by the application of a strong magnet. 2. Is this the strongest attractive power known? A. An electro-magnet properly constructed and supplied with a suitable current exerts the strongest attractive power. 3. Does magnetic steel retain its power permanently? A. Yes, if it is vibrated or heated. 4. Does rubbing steel to a permanent magnet give it the same power as applying loadstone? A. Yes.

(52) F. A. McL.—Your motor operates by the attraction of the excited armature for the iron of the magnet, and the armature induces magnetism in the cores of the magnets, and as a consequence you get an induced current in the wire of your field magnet.

© 1885 SCIENTIFIC AMERICAN, INC

(53) W. S. W. asks (1) how heavy an object will the strongest magnet to be procured raise four inches, holding magnet that distance from object? A. We do not know that the limit of the power of an electric magnet has ever been determined. Probably with sufficient outlay for electric generators and for the material of the magnet, you would be able to raise several tons a distance of four inches. 2. What would be the size of the magnet? A. This would be entirely a matter of experiment. 3. Where can I procure the strongest horseshoe magnet, or is the horseshoe the strongest permanent magnet? If not, what is? A. The strongest permanent magnets in the market are what are known as the machine magnets. You can buy them from any of our dealers in electric supplies. 4. What metal would the magnet have the most attraction for? A. For a permanent magnet, chrome steel is considered the best; for an electro-magnet, there is nothing superior to the softest iron. 5. What would be the cost of such a magnet? A. It is impossible to say.

(54) E. E. D. asks: Is it a fact that if a tank of water be weighed, and a fish of say 10 pounds placed in the tank, the weight will not be increased? A. If the amount of water is undiminished, the weight of the vessel will be increased by the weight of the fish.

(55) F. B.—Brass is seriously affected by mercury; copper is less affected; and iron is not affected at all. A common way of transporting mercury is by the use of iron flasks.

(56) J. M. A.—Your experiment producing electricity from a cat is quite old.

(57) L. H. asks for a polish with which tool handles, stocking bulbs, and small turned woodwork generally can be quickly and cheaply polished while in the lathe. A. A mixture of boiled linseed oil 2 parts, alcoholic shellac varnish, 1 part, well shaken together and applied sparingly with a cloth to the revolving work, will produce a fine polish.

(58) G. W. H. asks: 1. Would a top weighing one pound while at rest, weigh less while revolving at the rate of 10,000 revolutions a minute? A. The top would weigh the same under all circumstances. 2. Would a one pound weightweigh less at equator than at the poles? A. The difference would be very slight.

(59) C. V. asks how to make a shunt between the armature and field magnets, on a plating dynamo. A. Connect the terminals of your field magnet with your brushes. Unless your field magnet has a high resistance it is not adapted to a shunt, as most of the current from the armature would pass through the wires of the field magnet.

(60) D. E. B. writes: Suppose a cone-shaped piece of steel be placed on the positive and negative ends of a horseshoe magnet, thus joining them and continuing to a point; will that point be negative orpositive? A. If the magnet is perfectly balanced, and the armature is symmetrical and of homogeneous material, the point will be neutral.

(61) C. L. P. writes: I have two second-hand magnetos Will they ring bell on a line one mile long? Also, do they depreciate in efficiency by use? Suppose three magnetos in the houses A, B, and C; can any two houses communicate without ringing the bell at third house? Thus: B can call either A or C, but can A call B without calling C, or *vice versa*? A. Your magnetos should be capable of ringing bells on a line much more than a mile in length. If the magnets are of good quality, the machine should mantain its efficiency indefinitely. You cannot communicate in the manner suggested without having what is known as an individual call.

(62) H. W. B. asks: What size electro-magnet and with what size and quantity wire should it be wound in order to get the best results with five cells of gravity battery? A. Make the cores of your magnet ¾ inch in diameter and 6 inches long. Wind half the length of each arm with No. 20 wire to a depth equal to the diameter of the core.

(63) C. H. M. asks why a person will take cold quicker lying down on a bed than if sitting up—yet when they get into or go to bed, they are warmer than while sitting up. A. If you are correct in your statement, it is probably because more vital energy is put forth by people who are not lying down, and in bed one is generally protected by additional clothing.

(64) D. L. asks how to connect two electric bells (not magnetos) on one wire; the line is about ¼ of a mile long. Intend to use spring keys, but cannot figure out how to connect. When the key is pushed, the bell at the other side is to ring, or both. A. Use what is known as back contact keys, and ground the ends of your line through the back contacts and through the bells; take your battery current through the lower contact. If you desire to use a closed circuit, you may place your battery keys and bells directly in the circuit. In this case the keys will be normally closed, as in the ordinary telegraph circuit.

MINERALS, ETC.—Specimens have been received from the following correspondents, and examined with the results stated.

E. N. J.—No. 1 appears to be a clay containing shiny particles of mica. No. 2 is a rock consisting principally of the mineral hornblende. No. 3 is a hard silicious rock containing iron silicates as coloring materials.—H. J. B.—The specimens are ordinary clay colored by means of iron oxide, and have no value in New York. In the absence of a better material in your immediate vicinity, it is quite possible that you might be able to utilize them.—E. H.—The sample appears to be gold bearing quartz. The sulphurets are of iron, and possibly lead and silver. The specimen we should consider of value. The expense of an assay would be $5.00.—H. S. D.—The specimen is calcite, or crystallized limestone, and of no commercial value.—H. P. D.—The specimen is too light for kaolin, and is not sufficiently plastic to be of value for the making of pottery. It is probably a mixture of magnesia with clay.—H. P. B.—The mineral sent is staurolite.—A. D. —The specimen is of no value; it contains too much iron. The white variety of long fiber is the most sought after.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted,

February 17, 1885,

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]

Aerial navigation, vessel for, E. F. Falconnet..... 312,344
Air brake for locomotives and railway cars, C. A. Bass..... 312,245
Air forcing apparatus, O. Miliard..... 312,371
Air in malt houses, etc., apparatus for circulating and attempering, L. J. Wing..... 312,597
Alarm mechanism and apparatus for operating the same, W. M. Pease..... 312,504
Arch bars, machine for making, C. Alkins..... 312,244
Armpit shield, W. Betty..... 312,370
Awl for attaching buttons, R. & O. Miller..... 312,491
Axle clip, vehicle, E. N. Hatcher..... 312,465
Axle trimming tool, W. R. Sharp..... 312,521
Axle, wagon, A. E. Parker..... 312,502
Banjo, S. Gibbs..... 312,457
Barrel, folding, G. F. Knapp..... 312,475
Bars, machine for bending the ends of, A. Andersen..... 312,547
Battery. See Secondary battery.
Bed lounge, E. Burgess..... 312,327
Bicycle, E. G. Latta..... 312,277
Bit. See Bridle bit.
Blanket, J. Broadhead..... 312,323
Bleaching compound for jute paper stock, etc., P. Souders, *et al*..... 312,323
Block. See Building block. Sealskin sacque, dolman, and ulster block. Toy block.
Board. See Drawing board.
Boiler. See Steam boiler.
Bolt heading machine, J. Stacker..... 312,399
Boot or shoe edge trimmer, S. K. Knox..... 312,360
Boot or shoe lasting machine, C. Dancel..... 312,335
Boots or shoes, device for putting on, C. Blohm... 312,321
Boots or shoes, nailing apparatus for lasting, M. Brock..... 312,550
Boring and reaming tool, combined, W. E. Hill... 312,350
Bottle cover, siphon, C. T. Grosjean..... 312,562
Bottle stopper, F. Burns..... 312,328
Brake. See Air brake. Vehicle brake.
Breweries, apparatus for treating the refuse from, F. W. Wiesebrock..... 312,592
Brewers' grain, preserving, F. W. Wiesebrock.... 312,593
Bridle bit, H. S. Squier..... 312,397
Buckle, trace, W. Lerchen..... 312,567
Building block, S. T. Trumbull..... 312,305
Bung hole cutter, J. Kirby..... 312,359
Burglar alarm, F. Politz..... 312,508
Burner. See Gas burner. Vapor burner.
Button fastener, H. J. Weldon..... 312,309
Cable grip, J. H. Polhemus..... 312,507
Cable tramway, C. M. Huson..... 312,273
Camera stand, W. H. Lewis..... 312,363
Candles, apparatus for automatically extinguishing, L. C. Pinel..... 312,291
Cans, closing kerosene and other, H. Miller..... 312,372
Capsule cutter. J. Krehbiel..... 312,361
Car brake, C. E. Candee..... 312,429
Car coupling, J. T. Gilchrist..... 312,345
Car coupling, W. J. Hutson..... 312,353
Car coupling, J. F. Leech..... 312,362
Car coupling, R. S. Wheeler..... 312,310
Car door fastening, J. Kinzer..... 312,357
Car door lock, J. Kinzer..... 312,358
Car, dumping, W. J. March..... 312,282
Car, hand, J. Milliron, Jr..... 312,572
Car, street, M. A. Cutter..... 312,556
Car wheel, T. C. Elvin..... 312,263
Carburetor, air or gas, J. M. Palmer..... 312,289
Carding machine feeding device, E. Gessner..... 312,456
Carding machines, fleece dividing attachment for, J. S. Bolette..... 312,424
Carpet fastener, M. F. Strathy..... 312,402
Carriages, canopy holder for children's, A. G. Snell..... 312,395
Carrier. See Egg carrier.
Case. See Packing case. Toilet case.
Cauterizing apparatus, F. M. Roy..... 312,512
Cherry pitting machine, J. McVickar..... 312,370
Chimney cowl, W. E. Cooper..... 312,553
Churn power, J. A. Lawrence..... 312,278
Chute, portable, Hinds & Mace..... 312,468
Clamp. See Floor clamp.
Clamping device, adjustable, G. W. Zeigler..... 312,419
Clasp. See Pencil clasp.
Clip. See Axle clip.
Clip yokes, machine for making, W. S. Ward..... 312,534
Clock synchronizing apparatus, J. A. Lund..... 312,482
Clutch, friction, A. L. Stanford..... 312,400
Coffee berries, roasted, A. Schilling.....312,515, 312,516
Coffee mill, Milligan & Chaumont..... 312,493
Coffee roaster, C. Palitsch..... 312,376
Column, cast iron, P. H. Griffin..... 312,349
Comb. See Electro magnetic comb.
Combing machines, stop motion device for wool, J. Holden *et al*..... 312,271
Corking and filling machine, C. H. Dresser..... 312,448
Corner iron, T. Lumsdon..... 312,481
Coupling. See Car coupling.
Cultivator, T. Meikle..... 312,489
Cultivator, Presbrey & Nall..... 312,382
Cultivator attachment, J. E. Mitchell..... 312,574
Cultivator, harrow, Tuttle & Benedict..... 312,531
Cultivator, wheel, W. P. Brown..... 312,425
Curtain fixture, P. Von Lackum..... 312,532
Cutter. See Bunghole cutter. Capsule cutter.
Cutting and marking, convertible implement for, I. M. Pribyl..... 312,292
Damper, automatic stove, D. J. Dunn..... 312,449
Damper mechanism, clock for governing, J. A. Lakin..... 312,477
Door hanger, E. T. Prindle..... 312,294
Door or window screen, O. G. Newton..... 312,374
Door securer, E. A. Bullock..... 312,426
Drawing board, F. Weber..... 312,535
Drill. See Rock drill.
Ear drum, artificial, J. H. Nicholson..... 312,577
Ear tube, H. E. Waite..... 312,308
Edger, gang, W. A. Campbell..... 312,250
Egg carrier, J. A. Berry..... 312,319
Electric lighting, circuit for systems of, W. M. Thomas..... 312,589
Electric lights, apparatus for treating carbons for incandescent, E. A. Colby..... 312,552
Electrical reporting, receiving instrument for, W. M. Pease..... 312,503
Electro-magnetic comb, W. T. McGinnis..... 312,487
Electrotype plate and holder, A. W. Marshall..... 312,569
Elevator. See Portable elevator.
Elevator gate, automatic, R. Lade..... 312,276
Engine. See Gas engine. Single-acting engine.
Evaporator. See Sorghum evaporator.
Fan attachment, H. P. Watts..... 312,413
Farm gate, D. A. Dickinson..... 312,442
Farm gate, J. K. Wilmot..... 312,311
Feeder, stock, E. R. Harman..... 312,462
Fence, barbed, G. De Walt..... 312,440
Fence, barbed wire, F. D. Ford..... 312,454
Fence post, J. L. Smolley..... 312,524
Fencing, die for making barbed, A. P. Thayer..... 312,404
Fertilizer distributer, N. A. Currie..... 312,334
Fertilizer distributer and cultivator, H. A. Campbell..... 312,329
Filter, J. Mallie..... 312,281
Filter, F. X. Spitznagel..... 312,527
Firearm, breech-loading, Hurst & Schultz..... 312,564
Fire escape, portable, H. Wettstein..... 312,415
Fireiron stand and support for coal vases, combined, G. Russell..... 312,513
Flood gate, H. T. Day..... 312,437
Floor clamp, T. A. Southwick..... 312,526
Fluids, apparatus for the conveyance of, J. F. Bennett..... 312,318
Fruit jar, J. B. Wilson.....312,595, 312,596
Fruit picker, Brown & Alcorn..... 312,326
Furnace. See Glass melting furnace.
Furnace ash pan and screen, R. S. T. Cissel..... 312,331
Furnace door, W. O. Nightengale..... 312,578
Furnace grate, J. A. Price..... 312,293
Furnace grate, boiler, C. H. Holt..... 312,472
Galvanic element, A. Dun..... 312,339
Galvanic elements, apparatus for emptying and charging, A. Dun..... 312,340
Garter, C. C. Shelby..... 312,297
Gas apparatus, W. M. Casler..... 312,431
Gas burner, A. B. Lipsey..... 312,279
Gas burner, B. Martin..... 312,367
Gas engine, L. H. Nash.....312,494, 312,496 to 312,498
Gas engine igniter, L. H. Nash..... 312,499
Gas mains, detecting leaks in, G. Westinghouse, Jr.....312,541, 312,542
Gas mains, detecting leaks in, G. Westinghouse, Jr. (r)..... 10,561
Gas pressure regulator, L. G. Francis..... 312,560
Gas regulator or governor, J. H. Luther....312,483, 312,484
Gas under pressure, system for distributing, Hoeveler & McTighe..... 312,470
Gas works, discharging tar from hydraulic mains in, A. Hutchison..... 312,565
Gate. See Elevator gate. Farm gate. Flood gate.
Gate, C. L. Burden..... 312,427
Gate, H. H. Clement..... 312,432
Gate, A. H. Hatmaker..... 312,466
Gate, W. R. Pitt..... 312,380
Glass lamps, etc., mould for, J. M. Wood..... 312,312
Glass melting furnace, G. H. Benjamin..... 312,422
Glass, window, J. G. Pennycuick..... 312,290
Gluing slate and other frames, machine for, C. C. Shepherd..... 312,391
Gluing table, Clemons & Bower..... 312,433
Grading machine, road, R. Long..... 312,480
Grain adjuster for binders, A. Nichless..... 312,576
Grain binder, automatic, P. F. Hodges..... 312,469
Grain binding machine, W. Butterfield..... 312,428
Grain separator and smutter, combined, H. L. Martin..... 312,369
Graining machine, J. Decker..... 312,260
Hanger. See Door hanger.
Harrow, E. P. Clay.....312,254, 312,255
Harrow, J. & J. McIndoo..... 312,570
Harrow, G. W. Siddons..... 312,523
Harrow and seeder, combined, Corbin & Hill..... 312,554
Harrow, sulky, C. La Dow..... 312,476
Harvester, Dutton & Eickemeyer..... 312,450
Hay rake, horse, A. W. Force..... 312,453
Hay tedder and rake, combined, S. L. Denney..... 312,336
Heel burnishing machine, A. L. F. Mitchell..... 312,573
Hog ringing device, Drais & Hegler..... 312,445
Hoist, steam, C. Bezancon..... 312,423
Holder. See Rein holder. Sash holder. Stencil plate holder.
Horseshoe calks, treating stock for, C. H. Perkins..... 312,505
Hose patch, G. W. Towle, Jr..... 312,406
Ice cream freezer, T. A. Naylor..... 312,287
Incandescent light, O. B. Fahnehjelm..... 312,452
Inhalers, gas mixer for, L. M. Davis..... 312,435
Injector, O. Westphal..... 312,591
Insect powder gun, C. & E. E. Chinnock..... 312,252
Insecticide, J. B. Hoag..... 312,270
Insulated electrical conductor, Thomas & Frost.. 312,405
Iron. See Corner iron.
Jack. See Lifting jack.
Jar. See Fruit jar.
Joint. See Railway rail joint.
Journal bearing for car axles, C. E. Candee..... 312,430
Kettle attachment, W. W. Lamme..... 312,478
Key, J. H. Zeilin..... 312,545
Ladder, flexible extension, J. I. Ivester..... 312,354
Lamp, W. W. Batchelder..... 312,317
Lamp burner, E. J. Hale..... 312,267
Lamp collar, A. Rincklake..... 312,385
Lamp cut-out, electric, W. M. Thomas..... 312,529
Lamp extinguisher, I. & S. Weinstein..... 312,414
Lamp, hanging balanced electric, T. T. Smith..... 312,394
Lamp, safety, W. J. H. Ryder..... 312,584
Lamp, student, S. Russell..... 312,514
Lamps, lighting, S. E. Miller..... 312,285
Lantern, E. F. Cash..... 312,551
Last, E. E. Dutton..... 312,558
Latch, door, T. J. Morgan..... 312,575
Lathe for turning handles, H. Sheldon..... 312,298
Lathe for turning irregular forms, G. H. Ober..... 312,288
Lead and iron plate, combined, J. Makin..... 312,485
Leather to a uniform thickness, machine for reducing, W. W. Hubbard..... 312,272
Leg cord, artificial, M. Spring..... 312,396
Level, J. W. Atkinson..... 312,548
Level, rod plumbing, W. Gurley..... 312,266
Life raft, Cone & Groves..... 312,256
Lifting jack, J. Barrett..... 312,316
Light. See Incandescent light. Skylight.
Logs, apparatus for collecting scattered, A. McDougall..... 312,486
Loom shuttle, J. C. Sergeson..... 312,520
Lubricator, M. McMullin..... 312,283
Magnet, electro, E. F. Recordon..... 312,511
Mechanical movement, alternating reversing, C. C. Burton..... 312,249
Metal bars, apparatus for bending, J. H. Thomas..... 312,303
Metallic strips, machine for spirally winding, Tyrrell & Shipley..... 312,590
Mill. See Coffee mill. Roller mill.
Mirror, adjustable, T. F. Lynch..... 312,568
Motion, mechanism for converting, J. E. Pencille..... 312,378
Motor, J. A. Vlean..... 312,307
Net, mosquito, F. H. Holden..... 312,471
Nut lock, P. M. Crocker..... 312,555
Oils, manufacture of linseed and other, H. T. Yaryan..... 312,418
Oils, oxidizing linseed and other, J. W. & F. R. Hoard..... 312,351
Ores for amalgamation and desulphurizing the same, preparing, C. R. Squire..... 312,586
Ores for amalgamation, treatment of, C. R. Squire..... 312,587
Ox shoe, H. Hotchkiss..... 312,352
Packing case, J. C. Bauer..... 312,421
Paint, transfer, Kennerley & Creighton..... 312,474
Panel raising machine, J. Lobnitz..... 312,364
Pannier and bustle, J. Schoenhof..... 312,518
Paper bag machine, Cotton & Hewes..... 312,257
Paper machine stuff regulator, C. Young..... 312,314
Paper making machines, pulp vat for, J. F. Seiberling..... 312,390
Paper, manufacture of tarred, M. Ehret, Jr..... 312,451
Partition and ceiling, fireproof, C. Mettam..... 312,284
Pencil clasp, R. P. Scott..... 312,296
Photograph burnisher, C. Dorey..... 312,337
Photographic camera shutter, C. Prosch..... 312,581
Picker. See Fruit picker.
Pile driver, J. W. Putnam..... 312,582
Planter, corn, G. M. Williams..... 312,594
Planter, cotton seed, R. B. Smith..... 312,393
Plow, W. A. Estes..... 312,559
Plow, G. O. C. Srygley..... 312,298
Plow, reversible, J. L. Delano..... 312,438
Plow, sulky, L. M. Brock..... 312,324
Portable elevator, S. W. Rowell..... 312,387
Potassium, manufacture of ferro-cyanide of, H. Bower..... 312,248
Power. See Churn power.
Pressure regulator and cut-off, G. Westinghouse, Jr..... 312,543
Printer's rule, A. D. Stern..... 312,302
Printing machine, W. Scott..... 312,389
Printing machine, rubber stamp hand, R. Gaiger..... 312,455
Propeller, marine speed, J. S. Post..... 312,381
Pulverizer, T. C. D'Spain..... 312,338
Railway chair, street, B. F. Curtis..... 312,259
Railway, electric, L. Daft..... 312,557
Railway frog, W. H. Dickson..... 312,443
Railway rail joint, I. J. Miller, Jr..... 312,490
Railway tie, W. H. Knowlton..... 312,566
Rake. See Hay rake.
Reed plates and reeds, manufacture of, M. Bray.. 312,322
Regulator. See Gas regulator. Gas pressure regulator. Watch regulator.
Rein holder, C. Schoch..... 312,517
Rein spring, check, Champlain & Winans..... 312,330
Revolving stand, E. R. H. Teeter..... 312,528
Rice, flake, J. F. Gent..... 312,265
Roaster. See Coffee roaster.
Rock drill, C. S. Westbrook.....312,537, 312,538
Rock drill, hand power, L. W. Tracy..... 312,304
Rock drill, steam, J. C. Githens..... 312,348
Rock drill support, C. S. Westbrook.... ....312,539, 312,540
Rock drills, rotating feed for steam, J. C. Githens..... 312,346
Rock drills, rotatory feed for, E. E. Quimby..... 312,383
Rock drills, rotatory feed for steam, J. C. Githens..... 312,347
Rock drilling machines, support for, J. B. Waring..... 312,412
Rock pulverizer, D. C. Ebaugh..... 312,343
Roller mill, Smith & Cochrane..... 312,392
Ropes and yarns, manufacturing tarred, A. W. Montgomery..... 312,286
Salt grainer, R. M. Hunter..... 312,563
Sash fastener, F. M. Case..... 312,251
Sash fastening, J. C. Hibbs..... 312,268
Sash holder, Aurand & Scherer..... 312,315
Sash raising and lowering device, window, Eitel & Hunt..... 312,262
Saw, drag, M. O. Smith..... 312,299
Scale, weighing, C. Richtmann..... 312,583
Scarf shield, G. Selowsky..... 312,519
Scraper, road, A. Woolsey..... 312,313
Screen. See Door or window screen.
Sealskin sacque, dolman, and ulster block, P. Weinberg *et al*..... 312,536
Secondary battery, J. W. Swan..... 312,599
Separating or concentrating materials of different specific gravities, apparatus for, A. E. & W. L. Crow..... 312,333
Separator. See Grain separator.
Sewing linings or sweat bands into hat bodies, mechanism for, J. A. Locke..... 312,280
Sewing machine, R. H. Hawthorne..... 312,467
Sewing machine, J. W. Post..... 312,509
Sewing machine bobbin winder, J. H. Palmer..... 312,501
Sewing machine ruffler, M. G. Turner..... 312,306
Shaft and pulley bearing, combined, G. Gerdom... 312,561
Sheep stock, F. M. Swartz..... 312,403
Sheet delivery apparatus, L. C. Crowell..... 312,258
Sheet metal pipe, manufacturing, J. F. Starr, Jr.. 312,301
Shingle planing machine, T. S. Disston..... 312,444
Shutter, fireproof, C. F. Brigham..... 312,549
Shutter worker and slat operator, combined, T. H. Smith..... 312,300
Sifter, ash, B. H. Cook..... 312,434
Single-acting engine, L. H. Nash..... 312,495
Skylight, Seton & Conolly..... 312,585
Slag buggy, W. B. Devereux..... 612,439
Sled propeller, G. T. Sampson..... 312,388
Sleigh, bob, J. Roraback..... 312,386
Smoke consuming attachment for lamp and other chimneys, C. Martin..... 312,368
Soda water apparatus, F. R. H. Thomas..... 312,588
Solder, machine for making wire, Young & Dyer..... 312,598
Sole, reversible cork, D. S. Yeoman..... 312,544
Sorghum evaporator, D., Jr., & S. Rather..... 312,510
Spring. See Rein spring.
Stand. See Revolving stand.
Staple, J. Haight..... 312,460
Starch, etc., apparatus for drying, W. Duryea..... 312,341
Starch manufacture, etc., apparatus for drying the by-products of, W. Duryea..... 312,342
Steam boiler, J. O. Draper..... 312,447
Steam boiler, A. Pifre..... 312,379
Stencil plate holder, H. E. Richter..... 312,384
Stone, artificial, J. D. King..... 312,356
Stopper. See Bottle stopper.
Stove, cooking, C. F. Hanneman..... 312,461
Stove fire grate, J. Doheny..... 312,261
Stud for gloves, etc., spring, Mead & Pierce..... 312,571
Sunshade and umbrella, C. Drake..... 312,446
Surgical needle, G. Wackerhagen..... 312,408
Suspenders, Freeman & Overmeyer..... 312,264
Switch board, H. E. Waite..... 312,410
Telegraph, railway car, L. J. Phelps..... 312,506
Telephone, J. Lowth.....312,365, 312,366
Telephone, W. R. Miller..... 312,492
Telephone, T. Wallace..... 312,533
Telephone transmitter, H. E. Waite..... 312,409
Tenoning and boring machine, R. Triller..... 312,530
Tie. See Railway tie.
Tile, illuminated, E. N. Higley..... 312,269
Timepiece, C. S. Lewis..... 312,479
Toilet case and satchel, combined, L. Johnston.... 312,355
Tongue support, wagon, W. Bench..... 312,246
Torpedo, T. Nordenfelt..... 312,579
Toy block, J. B. Anderson..... 312,420

© 1885 SCIENTIFIC AMERICAN, INC

Tramways, device for loading and unloading, C. M. Huson 312,274
Tube. See Ear tube.
Twist drills, machine for making, G. R. Stetson 312,401
Type writing machine, J. C. Allen 312,546
Valve, steam, W. C. McKinnis 312,488
Vapor burner, C. V. Best 312,247
Vaporizer and fumigator, G. S. Goodhart 312,459
Vehicle brake, F. C. Day 312,436
Vehicle breeching attachment, J. C. Williams 312,416
Vehicle spring, A. H. Dickey 312,441
Velocipede, C. H. & J. I. Veeder 312,407
Velocipede, A. E. Wallace 312,411
Velocipede, T. B. Jeffery 312,473
Velocipede, railway, C. H. Copp 312,332
Vessels, decreasing the frictional resistance to, F. D. Owen 312,500
Wagon, dumping, G. W. Reed 312,205
Wall of buildings and other structures, W. H. Orr 312,375
Walls, constructing hollow brick, H. Harwood 312,464
Watch case, anti-magnetic, C. K. Giles 312,458
Watch regulator, D. H. Church 312,253
Water closet bidet attachment, J. L. Mott, Jr 312,373
Wheel. See Car wheel.
Wheel for belts or cables and means for driving them, C. M. Huson 312,275
Whip socket, Shorkey & Rush 312,522
Wire annealing apparatus, L. Williams 312,417
Wire, barbed, H. C. Hart 312,463
Wire splicer, P. A. O'Malley 312,580
Zincographic press bed, J. Brooks 312,325

DESIGNS.

Bas relief, A. Langenbahn *et al* 15,835
Cane or umbrella head, F. J. Kaldenberg 15,849
Carpet, E. Fisher ..... 15,817 to 15,829
Carpet, E. Fisher 15,848
Carpet, C. W. Swapp ..... 15,840 to 15,846
Carpet moulding, I. Holzmark 15,832
Filament, M. M. M. Slattery 15,839
Fireplace front, E. T. Schoonmaker ..... 15,836 to 15,838
Jar or bottle, Scott & Bryar 15,813
Needlework holder, F. Benjamin 15,812
Pail, lard, F. A. Walsh 15,847
Plow beam, O. A. Essig 15,814
Scarf, made-up, T. J. Flagg 15,830
Spoon handle, C. T. Grosjean 15,831
Stove, parlor or heating, R. D. Andrews 15,810
Type, font of printing, C. H. Beeler, Jr 15,811
Upholstery fabric, J. Ferguson 15,815, 15,816
Upholstery fabric, D. B. Kerr 15,833, 15,834

TRADE MARKS.

Bats, lawn tennis, A. G. Spalding & Brothers 11,956
Bats of all kinds, balls, Indian clubs, croquet mallets, and dumb-bells, A. G. Spalding & Brothers 11,957
Cottons, printed, dyed, colored, bleached, and unbleached, J. S. Bernheimer & Bro 11,948
Paper, writing, Chapin & Gould 11,949
Lamps, reflector, D. R. Williams 11,954
Liquid for beautifying and preserving the nails, S. P. Zacharie 11,955
Soap for laundry and general purposes, Procter & Gamble ..... 11,959 to 11,963
Spectacles and eyeglasses, J. King 11,958
Twine used for binder attachments for harvesting machines, Truman & Isham 11,953
Waterproof clothing, D. Jannopoulo 11,952
Whisky, brandy, and gin, Childs & Co 11,950
Whisky, rye and bourbon, S. C. Herbst 11,951

A printed copy of the specification and drawing of any patent in the foregoing list, also of any patent issued since 1866, will be furnished from this office for 25 cents. In ordering please state the number and date of the patent desired, and remit to Munn & Co., 361 Broadway, New York. We also furnish copies of patents granted prior to 1866; but at increased cost, as the specifications, not being printed, must be copied by hand.

Canadian Patents may now be obtained by the inventors for any of the inventions named in the foregoing list, at a cost of $40 each. For full instruction address Munn & Co., 361 Broadway, New York. Other foreign patents may also be obtained.

Advertisements.

Inside Page, each insertion - - - 75 cents a line.
Back Page, each insertion - - - $1.00 a line.
(About eight words to a line.)
Engravings may head advertisements at the same rate per line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

Woodworking Machinery.
For Planing Mills, Furniture and Chair Factories, Car and Agricultural Works, Carriage and Buggy Shops, and General Wood Workers. Manufact'd by **The Egan Company, Cincinnati, O., U. S. A.**
Full assortment of Perin Saw Blades.

HOW TO BECOME **"Quick at Figures."**
A collection of valuable Rules and Short-cuts for business calculations. It includes and fully explains the famous LIGHTNING METHOD OF ADDITION, and the Sliding Method of Multiplication, besides many other valuable contractions by which results are obtained rapidly and correctly. It commences where the text-book leaves off. Price $1, postpaid. THE WOODBURY CO., (P. O. Box 3608.) 105 Summer St., Boston, Mass.

CATALOGUES FREE TO ANY ADDRESS
TOOLS OF ALL KINDS TOOLS
GOODNOW & WIGHTMAN, BOSTON

PATENT FOR SALE Dr. Blethen's Soft Rubber Nose Shields for Eyeglasses. An invention for comfort. 43 Market St., Lynn, Mass.

Syracuse Malleable Iron Works

The New Catalogue of Valuable Papers
contained in SCIENTIFIC AMERICAN SUPPLEMENT, sent *free of charge* to any address.
MUNN & CO., 361 Broadway, N. Y.

Standard Thermometers.
Accurate, Legible.
SIZES OF DIALS, 5 and 8 INCHES.
FOR SALE BY THE TRADE.
Manufactured and Warranted by the
STANDARD THERMOMETER CO.,
PEABODY, MASS.
General Agents,
FAIRBANKS' SCALE HOUSES
In all the principal cities of the United States and Canada.

ROP HAMMERS
Punching Presses
DIES AND OTHER TOOLS
For the manufacture of all kinds of SHEET METAL GOODS, DROP FORGINGS, &c.
Stiles & Parker Press Co.
Middletown, Conn.

EVAPORATING FRUIT
Full treatise on improved methods, yields, profits, prices and general statistics, FREE.
AMERICAN MAN'F'G CO.
"BOX R," WAYNESBORO, PA.

Clark's Steel Cased Rubber Wheel,
FOR ROLLER SKATES.
For use in dwellings, public halls, etc. Will not chip or injure common floors. Noiseless. Genl. Agent.
M. C. Henley Skate Mfg., Richmond, Ind.

WE WILL SELL until MARCH 1st, OUR
$9 ORGUINETTE FOR $5
WITH ROLL MUSIC.
MAMMOTH CATALOGUE OF MAGIC LANTERNS, Musical, Electrical, &c., WONDERS, sent FREE.
HARBACH ORGAN CO. PHILAD'A, PA.
SUN TYPE WRITER $12, Practical Machine.



THE CELEBRATED
RACINE BOATS and CANOES,
ALSO ALL KINDS OF
LAPSTREAK BOATS.
We build to order anything in the boat line.
THOS. KANE & CO., (BOX F.)
137 and 139 Wabash Ave., CHICAGO.

PHONOGRAPHY, or Phonetic Short Hand. Catalogue of works by Benn Pitman and Jerome B. Howard, with alphabet and illustration for beginners, sent on application. Address:
PHONOGRAPHIC INSTITUTE, Cincinnati, Ohio.

THE DINGEE & CONARD CO'S
BEAUTIFUL EVER-BLOOMING
ROSES
Our Great Specialty is growing and distributing **ROSES**—we deliver strong Pot Plants, suitable for *immediate* bloom, safely by mail at all Post Offices. **5 Splendid Varieties,** *your choice*, all labeled, for **$1; 12 for $2; 35 for $5; 100 for $12.** Also
OTHER VARIETIES 2, 3, & 10 FOR $1
according to value. Send for our **New Guide,** 76 pp elegantly illus. and choose from over **500** finest sorts
Address, **THE DINGEE & CONARD CO.,**
Rose Growers, **West Grove, Chester Co., Pa.**

TIGHT & SLACK BARREL MACHINERY A SPECIALTY
JOHN GREENWOOD & CO.
ROCHESTER N.Y.

GOLD CHLORINATION IN CALIFORNIA.—An interesting paper by F. D. Browning, E.M., describing the mode of chlorinating gold as practiced in Grass Valley, Cal.—The ore and its treatment. Milling, roasting, chlorinating, leaching and precipitating. Extraction of silver. Preparation of reagents. The mill. The chlorination works. Illustrated with 20 engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 445. Price 10 cents. To be had at this office and from all newsdealers.

BURPEE'S FARM ANNUAL FOR 1885 FREE
Tells all about the **BEST SEEDS.** 120 pages, Hundreds of **New Illustrations** and **Two Colored Plates.** Send your address to
W. ATLEE BURPEE & CO. PHILA. PA

WATCHMAKERS.
Before buying, see the Whitcomb Lathe and the Webster Foot Wheel, made by the AMERICAN WATCH TOOL CO., Waltham, Mass. CATALOGUES FREE.

Beautiful & Lasting for ORNAMENTING WINDOWS, DOORS, TRANSOMS, &c.
Stained Glass SUBSTITUTE
AT SMALL COST. Send for Illustrated Catalogue and Prices. Samples by mail 25 cents.
W. C. YOUNG SOLE AGENT, 731 ARCH ST. PHILADELPHIA, PA.
AGENTS WANTED EVERYWHERE.

DUFFY'S
—PURE—
Malt Whiskey.
ABSOLUTELY PURE & UNADULTERATED. TRADE MARK.
Absolutely Pure and Unadulterated. Entirely Free from FUSIL OIL.
FUSIL OIL—Do you know what it is? Ask your Physician or Druggist and he will tell you that **IT IS A DEADLY POISON.** Positive Sure Cure for **Malaria, Pulmonary Complaints, Indigestion, Nervous Prostration, Bronchial Troubles, General Debility, Loss** of **Mental Power and all Wasting Diseases.** Endorsed by over **3,500 Physicians'** and Chemists. Invaluable as a **STIMULANT AND TONIC** in **Typhoid Fever, Dysentery Diarrhœa, and all low forms of Disease. THE RECOGNIZED**
ANTIDOTE FOR CHOLERA.
We are the only concern in the United States who are bottling and selling to the Medical Profession and Drug Trade an absolutely **Pure Malt Whiskey,** one that is free from **FUSIL OIL** and that is not only found on the sideboards of the best families in the country, but also in the physician's dispensing room.
DR. ARENDT, *the great German Chemist,* says:—*"I have made an analysis of your PURE MALT WHISKEY, which gave a very gratifying result. Your Malt Whiskey, obtained mostly by extract of malt convusion and a very careful fermentation and distillation, is* **entirely free from fusil oil** *and any of those similarly obnoxious alcohols which are so often found in whiskey. I therefore,*
RECOMMEND IT TO THE MEDICAL PROFESSION.
Prof. VON VONDER, writes:—"Purity itself—Duff's Malt Whiskey, is the purest liquor that I have ever analyzed. I must therefore unqualifiedly recommend it to the medical profession."
The late **HARVEY L. BYRD, M.D.,** President of the Faculty, and Professor of the Baltimore Medical College, says: "I find it remarkably free from fusil oil and other objectionable materials so often found in the whiskies of the present day.
JAMES J. O'DEA, M. D., of Staten Island, the author of several works on insanity, writes: "When I prescribe an alcoholic stimulant, I order your famous **Malt Whiskey,** I know it to be wholesome, clean and unadulterated."
FRED. H. SAWERS, M. D., of Rochester, N. Y. a graduate of the leading European colleges, says: "I prescribe your **Malt Whiskey** in my practice here, consider it a very superior reliable article and can heartily recommend it in low states of fevers, acute inflammations, and depressing maladies generally, and also as a tonic in feeble digestion and convalescence from acute diseases, where an alcoholic stimulant is indicated, and especially in Phthisis Pulmonalis."
IN FACT, IT IS A BEVERAGE AND MEDICINE COMBINED.
TO CONSUMPTIVES. and those afflicted with **HEMORRHAGES,** **WE WILL** on receipt of **SIX DOLLARS,** send to **any address in the United States** (East of the Rocky Mountains), **all Express Charges prepaid a plain case** (thus avoiding all opportunity for comment), containing **Six Quart bottles** of our **PURE MALT WHISKEY** and with it in writing, and under the **Seal of the Company a SURE** and **POSITIVE CURE** for **CONSUMPTION** and other **WASTING DISEASES in their early stages.** This Formula has been prepared especially for us by the great German Scientist, *Dr. Von Vonders.* It can be prepared by any family housekeeper at slight expense (Raw Beefsteak and our **PURE MALT WHISKEY** being of the ingredients.)
After this preparation has been taken for a few weeks, the previously conspicuously prominent bones in patients suffering from Consumption and the like diseases, get covered with a thick coating of fat and muscle, the sunken and bloodless cheeks fill up and assume a rosy hue, the drooping spirits revive, while all the muscles of the body, and chief among them the heart, are stronger and better able to perform their functions, because of being nourished with a richer blood than they had been before. In other words, the system is supplied with more carbon than the disease can exhaust, thereby giving nature the upper hand in the conflict.
SOLD BY LEADING DRUGGISTS AND FINE GROCERY HOUSES.
Price ONE DOLLAR PER BOTTLE.
Sample Quart Bottles sent to any address in the United States (East of the Rocky Mountains), securely packed in plain case, *Express charges prepaid* on receipt of **$1.25.**
THE DUFFY MALT WHISKEY CO., BALTIMORE, MD., U. S. A.

BORING and TURNING **MILLS,**
48 and 72 inch swing.
Upright Drills ALL SIZES.
H. BICKFORD, Cincin'ti, Ohio.

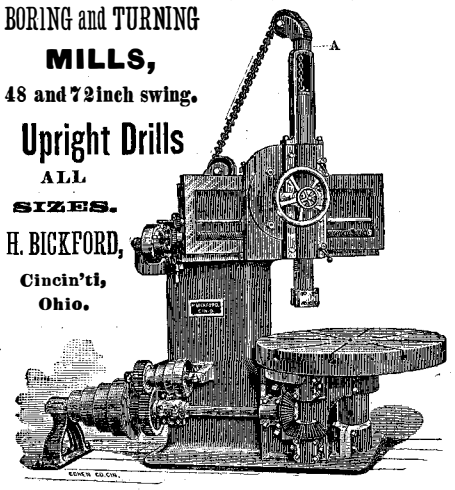

A. W. STEVENS & SON, AUBURN, N. Y.
Manufacturers of French Buhr Stone Corn and Feed Mills, Power Corn Shellers, Grain Thrashers and Separators, Plain and Traction Engines. Send for circulars.

LAST CHANCE
To obtain Government Lands free—that are suitable for general farming and stock raising purposes—before change of laws as per bills now pending in Congress.
320 ACRES IN THE DEVILS LAKE, TURTLE MOUNTAIN, And Mouse River Country. NORTH DAKOTA
Tributary to U. S. Land Office at Devils Lake, Dakota.
Over 2,000,000 Acres of R. R. Lands in Minnesota at the low price of $3.00 per acre and upwards. Sectional Map and full particulars mailed free to any address by C. H. WARREN, Gen'l Pass. Agent, St. Paul, Minn. and Manitoba R. R., ST. PAUL, MINN. **FREE**

The **Seibert Cylinder Oil Cup Co.,**



Manufacturers of **Oil Cups** for **Locomotive, Marine, and Stationary Engine Cylinders,** under the **Seibert** and **Gates Patents, with Sight Feed.**
TAKE NOTICE.
The "Sight Feed" is owned exclusively by this Company. See Judge Lowell's decision in the United States Circuit Court, District of Massachustts, Feb. 23, 82. All parties, except those duly licensed by us, are hereby notified to desist the use, manufacture, or sale of infringing Cups, as we shall vigorously pursue all infringers.
The Seibert Cylinder Oil Cup Co.
35 Oliver Street, Boston, Mass.

SEEDS GIVEN AWAY!
A PACKAGE Mixed Flower Seeds (400 kinds) with PARK'S FLORAL GUIDE, all for 2 stamps. Tell all your friends. G. W. PARK, Fannettsburg, Penna.
☞ Write now. This notice will not appear again.

J. A. FAY & CO.
Cincinnati, Ohio, U.S.A.
WOOD WORKING MACHINERY
—embracing nearly 300 different tools for Arsenals, Navy Yards, Car Shops, Bridge Works, Saw and Planing Mills, Door, Sash, Furniture, Piano & Organ factories &c. Including Sawing, Planing, Molding, Mortising, Tenoning, Shaping, Panelling, Boring, Dovetailing, Finishing, &c. of the highest standard of excellence and warranted the most labor saving of any in use.—
W. H. Doane, President. D. L. Eyon, Secy.

FRICTION CLUTCH
Pulleys and Cut-off Couplings.
JAS. HUNTER & SON, North Adams, Mass.

VIOLIN OUTFITS
Consisting of Violin, Box, Bow and Teacher, sent to any part of the United States on 1 to 3 days' trial before buying.
Violin Outfits
at $3.50, $7, $12, & $22 each. Send stamp for Beautiful Illustrated 36 page Catalogue of Violins, Guitars, Banjos, Cornets, Flutes, Strings all kinds, Harmonicas, Organ Accordeons, Music Boxes, &c. LOWEST PRICES. Mail Orders a Specialty. C. W. STORY, 26 Central St., Boston, Mass.

NATIONAL TOOL CO.,
MANUFACTURERS OF
MACHINISTS TOOLS.
WILLIAMSPORT, PA.
PLANERS A SPECIALTY.

VOLNEY W. MASON & CO.,
FRICTION PULLEYS CLUTCHES and ELEVATORS.
PROVIDENCE, R. I.

OUR STRONG and RELIABLE **ROSES** ARE FRAGRANT and BEAUTIFUL
6 STRONG PLANTS (your own selection) for $1. 24 for $4. 100 for $12.
ROSES BY MAIL 10 for ONE DOLLAR.
We mail our Catalogue (beautifully illustrated) to all interested in Rose Culture, upon application, Free.
R. SCOTT & SON, Rose Growers, Philadelphia.

PERFECT
NEWSPAPER FILE
The Koch Patent File, for preserving newspapers, magazines, and pamphlets, has been recently improved and price reduced. Subscribers to the SCIENTIFIC AMERICAN and SCIENTIFIC AMERICAN SUPPLEMENT can be supplied for the low price of $1.50 by mail, or $1.25 at the office of this paper. Heavy board sides; inscription "SCIENTIFIC AMERICAN," in gilt. Necessary for every one who wishes to preserve the paper.
Address
MUNN & CO.,
Publishers SCIENTIFIC AMERICAN.

© 1885 SCIENTIFIC AMERICAN, INC

Edwards' Books on the Steam Engine.

Modern American Marine Engines, Boilers, and Screw Propellers. Their Design and Construction, showing the Present Practice of the most Eminent Engineers and Marine Engine Builders in the United States. By Emory Edwards. Illustrated by 30 large and elaborate plates. 4to, ... **$5.00**

The Practical Steam Engineers' Guide in the Design, Construction, and Management of American Stationary, Portable, and Steam Fire Engines, Steam Pumps, Boilers, Injectors, Governors, Indicators, Pistons and Rings, Safety Valves, and Steam Gauges. For the Use of Engineers, Firemen, and Steam Users. Illustrated by 119 engravings. 420 pages, 12mo, **$2.50**

A Catechism of the Marine Steam Engine. For the Use of Engineers, Firemen, and Mechanics. A Practical Work for Practical Men. Illustrated by 63 engravings, including examples of the most modern engines. Third edition, thoroughly revised, with much new matter. 12mo, 414 pages, ... **$2.00**

Modern American Locomotive Engines. Their Design, Construction, and Management. Illustrated by 78 engravings. 12mo, 383 pages, . . . **$2.00**

☞ *The above or any of our Books sent by mail free of postage at the publi ation price to any address in the world.*

☞ *Our Catalogue of Practical and Scientific Books, 96 pages, 8vo, as well as our other Catalogues and Circulars, the whole covering every branch of Science Applied to the Arts, sent free and free of postage to any one in any part of the world who will furnish us with his address.*

HENRY CAREY BAIRD & CO.,
INDUSTRIAL PUBLISHERS, BOOKSELLERS & IMPORTERS,
810 Walnut Street, Philadelphia, Pa.

PROPOSALS FOR STEAM BOILERS.

Nashville, Tenn., Feb. 12, 1885.

Sealed proposals will be received by the Board of Public Works and Affairs, Nashville, Tenn., until 2 P. M., March 10th, for furnishing and erecting at the present pumping station of the Nashville Water Works a battery of Steam Boilers, complying with the following conditions and specifications:

The boilers are to have an easy capacity to evaporate eighteen thousand pounds of water per hour from feed water at 125° F., to dry steam at eighty pounds pressure, using bituminous slack coal. They are to be, in every particular, first class in design, material, and construction, and will be held rigidly to fulfill the specified conditions, tests, and inspections. Each boiler is to be capable of separation from all the others, so as to be fired or cooled without interfering with the working of the others. The stack is now standing (brick); height above grate level, 100 ft. Area of flue, 20 square ft.

The city will furnish the raw materials for foundations, setting, and furnace, except iron; all other materials, connections, safety valves, stop valves, blowoff valves, feed check valves, steam and water gages and cocks, wrenches, and furnace tools, as well as all labor and appliances necessary to construct, deliver, erect, and connect the boilers in complete working order, are to be supplied by the contractor. No proposal will be considered which does not specifically state the evaporative rate which the bidder will guarantee, with security, if awarded the contract; such evaporative rate shall be construed as the number of pounds water evaporated from and at 212° F. per pound of *combustible*. The fulfillment of the guarantee will be determined by a three days' working test, using screened Hecla Lump Coal, with feed water at 125° F., steam at eighty pounds, and the results will be reduced to weight of *combustible*, and evaporation from and at 212° F.

Builders will state the *least* interval after award of contract in which they will complete the work.

Forms on which proposals must be submitted, details, specifications, and comparative values of Hecla and other coals, will be furnished on application.

By order of the Board of Public Work and Affairs.
R. EWING, Chairman.

IMPROVED FOOT AND POWER LATHES.
AND MACHINISTS TOOLS.
$60
CATALOGUES FREE. — LATHES ON TRIAL.
SEBASTIAN, MAY & CO.
187 W. PEARL ST. CINCINNATI, O.

CABINET WOODS
AND MAHOGANY.
GEO. W. READ & CO.,
BAND AND VENEER SAW AND CUTTING MILLS,
186 to 200 LEWIS STREET, N. Y.

THE PAYNE AUTOMATIC ENGINE

Gives more power from same amount of fuel and water than any engine



made, and 50 per cent more power than rated at. All engines warranted. All sizes and styles, 2 to 250 horse power. Send for prices and catalogue A 4.

B. W. PAYNE & SONS,
P. O. Box 1207. Elmira, N. Y.
Or our General Sales Office, 83 Liberty St. & 149 B'way, N.Y.



LUNKENHEIMER'S
NEW AUTOMATIC
LOOSE PULLEY OILER

The only practical and efficient Oiler ever offered for this purpose.

Sample sent for Trial.

Cincinnati Brass Works.

PATENTS.

MESSRS. MUNN & CO., in connection with the publication of the SCIENTIFIC AMERICAN, continue to examine Improvements, and to act as Solicitors of Patents for Inventors.

In this line of business they have had *forty years' experience*, and now have *unequaled facilities* for the preparation of Patent Drawings, Specifications, and the prosecution of Applications for Patents in the United States, Canada, and Foreign Countries. Messrs. Munn & Co. also attend to the preparation of Caveats, Copyrights for Books, Labels, Reissues, Assignments, and Reports on Infringements of Patents. All business intrusted to them is done with special care and promptness, on very reasonable terms.

A pamphlet sent free of charge, on application, containing full information about Patents and how to procure them; directions concerning Labels, Copyrights, Designs, Patents, Appeals, Reissues, Infringements, Assignments, Rejected Cases, Hints on the Sale of Patents, etc.

We also send, *free of charge*, a Synopsis of Foreign Patent Laws, showing the cost and method of securing patents in all the principal countries of the world.

MUNN & CO., Solicitors of Patents,
361 Broadway, New York.

BRANCH OFFICE.—Corner of F and 7th Streets, Washington, D. C.



OTTO GAS ENGINE OVER 10.000 IN USE

WORKS WITHOUT ENGINEER OR BOILER. STEAM COAL OR ASH. START SAT ONCE AND IS FREE OF DANGER FIRE OR EXPLOSION. 1 to 25 HORSE POWER. SCHLEICHER SCHUMM & CO
47 DEY ST. NEW YORK. 214 RANDOLPH ST CHICAGO. 33d & WALNUT STS. PHILADELPHIA



ECONOMIC MOTOR CO.'S
GAS ENGINES.

Best in principle, workmanship, and materials.
An unequaled small Motor adapted to all uses.
Simple, Safe, Economical, Durable.
Four sizes: 1 H. P., ½ H. P., 1 man power, and a Sewing Machine Motor.
Send for Circulars.

ECONOMIC MOTOR CO.,
12 CORTLANDT STREET, NEW YORK.

Steel Castings

From ¼ to 15,000 lb. weight, true to pattern, of unequaled strength, toughness, and durability. 20,000 Crank Shafts and 15,000 Gear Wheels of this steel now running prove its superiority over other Steel Castings Send for circular and prcie list.

CHESTER STEEL CASTINGS CO.,
407 Library St., Philadelphia, Pa.

GAS CONSUMERS.

The use of our Impoved Moderator will save you 15 to 40 per cent. No leather, rubber, or mercury. It is the best. Simple, reliable, accurate, metallic. Works where others fail. **HOWARD BROS. & CO.,**
164 West Broadway, N. Y.

With this *WONDERFUL* Art Appliance beginners soon rival artists using old methods. Command better prices and ready sales. Thousands having taste in art, if developed by use of the AIR BRUSH, can secure pleasant and profitable employment. Send for particulars. Free. **AIR BRUSH MFG. CO.,** *Address No.* 67 *Nassau St.* **Rockford, Ill.**

PATENT COLD ROLLED SHAFTING.

The fact that this shafting has 75 per cent. greater strength, a finer finish, and is truer to gauge, than any other in use renders it undoubtedly the most economical. We are also the sole manufacturers of the CELEBRATED COLLINS' PAT. COUPLING, and furnish Pulleys, Hangers, etc., of the most approved styles. Price list mailed on application to JONES & LAUGHLINS, Limited,
Try Street, 2d and 3d Avenues, Pittsburg, Pa.
Corner Lake and Canal Sts., Chicago, Ill.
☞ Stocks of this shafting in store and for sale by FULLER, DANA & FITZ, Boston, Mass.
Geo. Place Machinery Agency, 121 Chambers St., N. Y.

THE DESIGNING OF ORDINARY HIGHWAY BRIDGES.

Illustrated by numerous Engravings and Seven Folding Plates, showing Bridges actually constructed, and giving their dimensions; also containing 42 valuable tables. By J. A. WADDELL, C.E. 8vo, cloth. **$4.00**

PUBLISHED BY
JOHN WILEY & SONS,
NEW YORK.

Mailed and prepaid on the receipt of the price.

From A. J. DUBOIS, Professor of Dynamic Engineering, Sheffield Sci. School, Yale College.

I congratulate you on the book. It is just what the student needs, and the only book which covers the ground of practical designing at all adequately; it covers it admirably too. I never looked over a work with more genuine satisfaction, etc., etc.



SHIPMAN STEAM ENGINE.
A BOAT AND STATIONARY ENGINE.

No skilled attendant required! Safe from fire and explosion! No expense when engine stops!

—Steam in FIVE minutes.—

Runs ten hours on less than 3 Gallons of Kerosene. See Illustrated article in this paper, September 13.

SHIPMAN ENGINE CO. 55 Franklin St., Boston

PRICES

Including crating, and free delivery on cars or to express company's office from any one of our agencies or factories.

ENGINE No. 1, ½ to ½ H.P. . . . $100
" No. 2, full 1 H.P. . . . 125
" No. 3, full 2 H.P. . . . 175

Illustrated Catalogues on receipt of stamp.



THE CAMERON STEAM PUMP.
STANDARD OF EXCELLENCE.
30,000 IN USE.
MANUFACTURED SOLELY BY
The A. S. CAMERON STEAM PUMP WORKS, Foot East 23d St., New York.

THE **PUSEY & JONES CO.** BUILDERS OF ALL DESCRIPTION OF
Wilmington, Delaware. **MACHINERY USED BY MANUFACTURERS OF PAPER.**



A. A. GRIFFING IRON CO
STEAM HEATING Apparatus
SOLE MANUFACTURERS
BUNDY STEAM RADIATOR
750 COMMUNIPAW AVE. JERSEY CITY, N.J.

See illus. article in SCIENTIFIC AMERICAN Sept. 13, 1884.

BARNES'

Patent Foot Power Machinery. COMPLETE Outfits for actual workshop business. With them Builders, Cabinet Makers, Metal and Wood Workers compete with steam power. Machines **on trial** if desired. Proof of value, prices, full detail, illustr'd catalogue, free.
W. F. & John Barnes Co.
Rockford, Ill.
Address No 1999 Main St.





THE BEST STEAM PUMP.
Van Duzen's Patent Steam Pump.

Incomparable in cheapness and efficiency. Needs no care or skill; cannot get out of order; has no moving parts.

A Superior Fire Pump.

Instantaneous and powerful, ever ready. Available, wherever steam pressure can be had, for pumping any kind of liquid (hot, cold, sandy, impure, etc.). We make ten sizes, prices from $7 to $75. Capacities from 100 to 20,000 gallons per hour. State for what purpose wanted and send for Catalogue of "Pumps." **Van Duzen & Tift, Cincinnati, O.**

RAILWAY AND STEAM FITTERS' SUPPLIES.
Rue's Little Giant Injector.
SCREW JACKS, STURTEVANT BLOWERS, &c.
JOHN S. URQUHART, 46 Cortlandt St., N. Y.

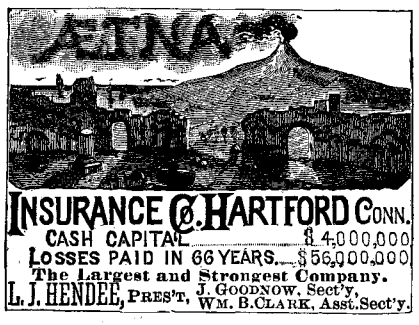
ÆTNA
INSURANCE CO. HARTFORD CONN.
CASH CAPITAL $4,000,000
LOSSES PAID IN 66 YEARS. . . $56,000,000
The Largest and Strongest Company.
L. J. HENDEE, PRES'T, J. GOODNOW, Sec'y, WM. B. CLARK, Asst. Sec'y.

NEW SOUTH WALES.

To Iron and Steel Bridge Builders.

The Agent General for New South Wales invites Designs and Tenders from Iron and Steel Bridge Builders of experience for a Steel Bridge to carry a double line of Railway across the River Hawkesbury, near Sydney, New South Wales.

The distance between the Abutments of the Bridge is about 2,900 feet. The Bridge is to be a clear height of 40 feet above high water. The River is an average depth of about 50 feet, and the foundations will have to be carried down to about 120 feet below bed of the river.

The terms and conditions, with a section of the river, and plan of site, can be obtained from the Agent General on payment of one guinea, to be sent with the application, which should be made in writing and accompanied by a list of works of similar character previously executed by the parties applying.

The Designs and the Tenders are to be delivered to the Agent General for New South Wales at the undermentioned office on or before the first day of June, 1885.

SAUL SAMUEL,
Agent General for New South Wales,
5 Westminster Chambers, S. W.,
5th February, 1885. London, England.

PLANTS
"ONLY THE BEST."
SEEDS
ILLUSTRATED CATALOGUE with colored plate of NIAGARA GRAPE. Sent free
A. D. COWAN & CO. 114 Chambers St. New York.
BULBS & GARDEN TOOLS



ROCK BREAKERS AND ORE CRUSHERS.

We manufacture and supply at short notice and lowest rates, Stone and Ore Crushers containing the invention described in Letters Patent, issued to Eli W. Blake, June 15th, 1858, together with NEW AND VALUABLE IMPROVEMENTS, for which Letters Patent were granted May 11th and July 20th, 1880, to Mr. S. L. Marsden All Crushers supplied by us are constructed under the superintendence of Mr. Marsden, who, for the past fifteen years, has been connected with the manufacture of Blake Crushers in this country and England.

FARREL FOUNDRY AND MACHINE CO., Manufrs., Ansonia, Conn.
COPELAND & BACON, Agents, New York.

ROOT'S NEW IRON BLOWER



POSITIVE BLAST.
IRON REVOLVERS, PERFECTLY BALANCED,
Has Fewer Parts than any other Blower.
P. H. & F. M. ROOTS, Manufacturers,
CONNERSVILLE, IND.
S. S. TOWNSEND, Gen. Agt., 22 Cortland St., 9 Dey St.,
COOKE & CO., Selling Agts., 22 Cortland Street,
JAS. BEGGS & CO., Selling Agts. 9 Dey Street,
NEW YORK.
SEND FOR PRICED CATALOGUE.

IT PAYS to sell our Rubber Stamps. Free catalogue to Agents. FOLJAMBE & CO., Cleveland, O.

ROLLSTONE VARIETY LATHE.

Latest improved. Rotary and Stationary Bed Planers and Buzz Planers; Band Saws; *Wardwell's Patent Saw Bench* Dowel Machine; Chair Machinery; Boiler Machines, etc. *Also large Stock of Second hand Machinery always on hand.* Send for catalogue, and state just what you want to ROLLSTONE MACHINE, Co., 48 Water St., Fitchburg, Mass.

Nervous Debility Quick permanent cure. Book free. Civiale Agency, 160 Fulton St., N.Y.

Before
After
$100.00
DYKE'S BEARD ELIXIR
Forces luxuriant Mustache, Whiskers, or hair on bald heads in 20 to 30 days. No injury. Easily used. Beats the world. 2 or 3 Pkgs does the work. Will prove it or forfeit. Price per Package with directions sealed and postpaid 25 cents, 3 for 50 cts., stamps or silver.
L. A. L. SMITH & CO., Agents, Palatine, Ill.

WeakNervousMen

Who suffer from **Debility, Premature Decay** and **Exhausted Powers,** certainly and permanently cured without **STOMACH MEDICINES** by the **Marston Bolus;** the new plan of treating Nervous Debility, Physical Decay, &c. Endorsed by thousands who have been restored to full and **perfect manhood.** ☞ Sealed treatise sent free. **Varicocele** cured without Surgery. Address
MARSTON REMEDY CO., or DR. H. TRESKOW,
46 West 14th Street, New York.



A GREAT MEDICAL WORK ON MANHOOD.

Exhausted Vitality, Nervous and Physical Debility, Premature Decline in Man, and the untold miseries flesh is heir to. A book for every man, young, middle-aged, and old. It contains 125 prescriptions for all acute and chronic diseases, each one of which is invaluable—so found by the author, whose experience for 23 years is such as probably never before fell to the lot of any physician. Three hundred pages, bound in beautiful French muslin, embossed covers, full gilt, guaranteed to be a finer work in every sense—mechanical, literary, and professional—than any other work sold in this country for $2.50, or the money will be refunded in every instance. Price only $1.00 by mail, postpaid. Illustrative sample, 6 cents. Send now. Gold medal awarded the author by the National Medical Association, to the officers of which he refers.

Address the Peabody Medical Institute, or Dr. W. H. Parker, No. 4 Bulfinch Street, Boston, Mass., who may be consulted on all diseases requiring skill and experience.

FOREIGN PATENTS.
Their Cost Reduced.

The expenses attending the procuring of patents in most foreign countries having been considerably reduced the obstacle of cost is no longer in the way of a large proportion of our inventors patenting their inventions abroad

CANADA.—The cost of a patent in Canada is even less than the cost of a United States patent, and the former includes the Provinces of Ontario, Quebec, New Brunswick, Nova Scotia, British Columbia, and Manitoba.

The number of our patentees who avail themselves of the cheap and easy method now offered for obtaining patents in Canada is very large, and is steadily increasing.

ENGLAND.—The new English law, which went into force on Jan. 1st, enables parties to secure patents in Great Britain on very moderate terms. A British patent includes England, Scotland, Wales, Ireland and the Channel Islands. Great Britain is the acknowledged financial and commercial center of the world, and her goods are sent to every quarter of the globe. A good invention is likely to realize as much for the patentee in England as his United States patent produces for him at home, and the small cost now renders it possible for almost every patentee in this country to secure a patent in Great Britain, where his rights are as well protected as in the United States.

OTHER COUNTRIES.—Patents are also obtained on very reasonable terms in France, Belgium, Germany, Austria, Russia, Italy, Spain (the latter includes Cuba and all the other Spanish Colonies), Brazil, British India, Australia, and the other British Colonies.

An experience of FORTY years has enabled the publishers of THE SCIENTIFIC AMERICAN to establish competent and trustworthy agencies in all the principal foreign countries, and it has always been their aim to have the business of their clients promptly and properly done and their interests faithfully guarded.

A pamphlet containing a synopsis of the patent laws of all countries, including the cost for each, and othe information useful to persons contemplating the procuring of patents abroad, may be had on application to this office.

MUNN & CO., Editors and Proprietors of THE SCIENTIFIC AMERICAN, cordially invite all persons desiring any information relative to patents, or the registry of trade-marks, in this country or abroad, to call at their offices, 361 Broadway. Examination of inventions, consultation, and advice free. Inquiries by mail promptly answered.

Address, **MUNN & CO.,**
Publishers and Patent Solicitors,
361 Broadway, New York.
Branch Office, cor. F and 7th Streets, opposite Patent Office Washington, D. C.

© 1885 SCIENTIFIC AMERICAN, INC

Advertisements.

Inside Page, each insertion - - - 75 cents a line.
Back Page, each insertion - - - $1.00 a line.

(About eight words to a line.)

Engravings may head advertisements at the same rate per line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

SUMMARY OF
FORTIETH ANNUAL REPORT
OF THE
New-York Life Insurance Co.

BUSINESS OF 1884.

REVENUE ACCOUNT.

Premium Receipts	$11,268,850.76
Interest Receipts	2,971,624.63
Total Income	$14,240,475.39

DISBURSEMENT ACCOUNT.

Paid Death-claims	$2,257,175.79
" Endowments	873,808.50
" Annuities, Dividends, and Surrender Values	3,603,970.85
Total Paid Policy-holders	$6,734,955.14
New Policies issued	17,463
New Insurance written	$61,484,550

CONDITION Jan. 1, 1885.

Cash Assets	$59,283,753.57
Surplus (Company's Standard)	$4,371,014.90
Surplus by State Standard (estimated)	$10,000,000
Policies in Force	78,047
Insurance in force	$229,382,586
Increase in Assets, 1884	$3,740,850.85

Death-claims paid	1880, $1,731,721		Income from interest	1880, $2,317,889	
	1881,	2,013,203		1881,	2,432,654
	1882,	1,955,292		1882,	2,798,018
	1883,	2,263,092		1883,	2,712,863
	1884,	2,257,175		1884,	2,971,624

Cash Assets.	Amount at risk.
Jan. 1, 1881, $43,183,934	Jan. 1, 1881, $135,726,916
Jan. 1, 1882, 47,228,781	Jan. 1, 1882, 151,760,824
Jan. 1, 1883, 50,800,396	Jan. 1, 1883, 171,415,097
Jan. 1, 1884, 55,542,902	Jan. 1, 1884, 198,746,043
Jan. 1, 1885, 59,283,753	Jan. 1, 1885, 229,382,586

The Latest Advance in Life Insurance
IS THE
Non-Forfeiting Limited Tontine Policy
OF THE
NEW-YORK LIFE
Insurance Co.

A Policy combining the Non-forfeiture features, originated by the NEW YORK LIFE in 1860, with the Privileges and Profits of its popular "Tontine Investment Policy."

IT FURNISHES:

1. Term Insurance at low rates, with surplus accumulations at compound interest.
2. The privilege of continuing your insurance at original rates after your Tontine Period expires.
3. The entire Cash Value of your Policy in Ten, Fifteen, or Twenty years, on the basis of full legal reserve.
4. A grace of one month in payment of premiums, during which time your indemnity will be unimpaired.
5. Protection against loss, in case of default in payment of premium after three years, by the guarantee of a paid-up policy—as upon ordinary policies.

MORRIS FRANKLIN, President.
WILLIAM H. BEERS, Vice-President and Actuary.
HENRY TUCK, 2d Vice-President.
THEODORE M. BANTA, Cashier.
D. O'DELL, Superintendent of Agencies.
HENRY TUCK, M.D., A. HUNTINGTON, M.D., } Medical Directors.

DRAWING INSTRUMENTS.

Illustrated catalogue sent on application to
WM. T. COMSTOCK,
6 Astor Place,
New York.

H.W. JOHNS'
ASBESTOS
PISTON PACKING.

Our improved elastic Asbestos Piston Packing is composed of the best quality of pure Asbestos fiber, and forms the most perfect, compact, and durable Packing ever produced for locomotive, marine, and other engines, valve-stems, etc. It requires less oil than any other, being to a great extent self-lubricating, and wears ten times as long as ordinary packings. It is proof against acids.

Asbestos Wick Packing,
Asbestos Mill Board,
Asbestos Gaskets and Rings,
Asbestos and Rubber Tape and Cloth.

Asbestos Boiler Coverings.

Our ASBESTOS CEMENT FELTING is the most effective and durable NON-CONDUCTING COVERING for STEAM PIPES, BOILERS, STILLS, and other Steam-Heated Surfaces. It is composed of Asbestos fibre and a cementing compound, which forms a light, porous Covering, partaking of the nature of a Felt and a Cement. It can be easily applied by any one.

Asbestos Hot Blast Cement Felting,
Asbestos Air Chamber Covering,
Asbestos Locomotive Lagging,
Asbestos and Hair Woven Felt.

We also manufacture Asbestos Cloths, Asbestos Cord, Twine, Yarn, and Sewing Twine, Asbestos Sheathing, Asbestos Paper, Asbestos Gasket and Retort Cements, Sheathing Felts, Etc., also the Standard

ASBESTOS ROOFING
LIQUID PAINTS, PURE COLORS, ETC.

DESCRIPTIVE PRICE LIST AND SAMPLES FREE.

H. W. JOHNS M'F'G CO.,
87 Maiden Lane, New York.
175 Randolph St., Chicago. 170 N. 4th St., Philadelphia.
Billiter House, Billiter Stre t, London.

Holland's Double Globe Valves
SOLD BY THE POUND.

They combine the brass seat and rubber disks. We guarantee them to weigh more than any others in the market.
Samples sent for trial.

HOLLAND & THOMPSON, Manufacturers,
217 RIVER ST., TROY, N. Y.



JENKINS' PATENT VALVES.
Gate, Globe, Angle, Check, and Safety.
MANUFACTURED OF BEST STEAM METAL.

Are the acknowledged standard of the world. Have been in use since 1868, under all possible conditions, and never have failed.

To avoid imposition, see that valves are stamped "Jenkins Bros."

JENKINS BROS.,
71 John Street, New York. Send for Price List "A." **79 Kilby Street, Boston.**

PATENT RIVETED MONARCH RUBBER BELTING.
The Best in the World.

Specially adapted for use in PAPER MILLS, SAW MILLS, and on THRESHING MACHINES.

THE CUTTA PERCHA and RUBBER MFG. CO.,
New York, Chicago, San Francisco, Toronto.

WM. A. HARRIS,
Providence, R. I. (Park St.), Six minutes' walk West from station.
Original and Only Builder of the
HARRIS-CORLISS ENGINE,
With Harris Pat. Improvements, from 10 to 1,000 H. P.
Send for copy Engineer's and Steam User's Manual. By J. W. Hill M.E. Price $1.25.

KORTING UNIVERSAL INJECTOR



FOR BOILER FEEDING.
Operated by one handle.
WILL LIFT HOT WATER.
POSITIVE ACTION GUARANTEED UNDER ALL CONDITIONS.
NO ADJUSTMENT FOR VARYING STEAM PRESSURE.
WILL LIFT WATER 25 FEET. SEND FOR DESCRIPTIVE CIRCULAR.

OFFICES AND WAREROOMS:

Philada., 12th & Thompson Sts.
Boston, 61 Oliver St.
Augusta, Ga., 1026 Fenwick St.
San Francisco, Cal., 2 California Street.
New York, 109 Liberty Street.
Denver, Col., 438 Blake Street.
Chicago, Ill., 204 Lake St.



SUPPLIES FROM HYDRANT PRESSURE, the cheapest power known. Invaluable for blowing Church Organs, running Printing Presses, *Sewing Machines in Households*, Turning Lathes, Scroll Saws, Grindstones, Coffee Mills, Sausage Machines, Feed Cutters, *Electric Lights*, Elevators, etc. It needs little room, no firing up, fuel, ashes, repairs, engineer, explosion, or delay, no extra insurance, no coal bills. Is noiseless, neat, compact, steady; will work at any pressure of water above 15 lb.; at 40 lb. pressure has 4-horse power, and capacity 2 up to 10-horse power. Prices from $15 to $300. Send for circular to
THE BACKUS WATER MOTOR CO., Newark, N. J.

CUTLER'S POCKET INHALER
AND
Carbolate of Iodine
INHALANT.

A cure for Catarrh, Bronchitis, Asthma, and all diseases of the Throat and Lungs—even **Consumption**—if taken in season. It will break up a **Cold** at once. It is the **King of Cough Medicines.** A few inhalations will correct the most **Offensive Breath.** It may be carried as handily as a penknife, and is guaranteed to accomplish all that is claimed for it.

As a *preventive* it is in truth the "magical Amulet" with which one may bid defiance to *Cholera, Yellow Fever*, and all *Miasmatic* and *Infectious* diseases. It has been thoroughly tested in various hospitals and localities infected with *Malaria, Small Pox, Diphtheria*, etc., and of the great number of persons, including Physicians and Nurses, who used the INHALER as a preventive, not one is known to have been attacked with any of the diseases to which they were exposed.

Patented through the agency of the SCIENTIFIC AMERICAN in 1873, this Inhaler has since had a larger and more extensive sale than any Medical Instrument ever invented. It is the only **Inhaler** approved by physicians of every school, and indorsed by the **standard medical journals** of the world. **All others** in the market are either **worthless** substitutes or **fraudulent** imitations.

Over 400,000 in use.
Sold by Druggists for **$1.00.** By mail, $1.25.
W. H. SMITH & CO., PROP'S,
410 Michigan St., Buffalo. N. Y.



Rider's New and Improved COMPRESSION Hot Air Pumping Engine

New and Improved Designs.
INTERCHANGEABLE PLAN
MANUFACTURED BY
DELAMATER IRON WORKS,
C. H. DELAMATER & CO., Proprietors,
No. 16 CORTLANDT ST., NEW YORK, N. Y.
And 40 Dearborn Street Chicago, Ill.

GRATEFUL—COMFORTING.

EPPS'S COCOA.
BREAKFAST.

"By a thorough knowledge of the natural laws which govern the operations of digestion and nutrition, and by a careful application of the fine properties of well-selected Cocoa, Mr. Epps has provided our breakfast tables with a delicately-flavored beverage which may save us many heavy doctors' bills. It is by the judicious use of such articles of diet that a constitution may be gradually built up until strong enough to resist every tendency to disease. Hundreds of subtle maladies are floating around us, ready to attack wherever there is a weak point. We may escape many a fatal shaft by keeping ourselves well fortified with pure blood and a properly nourished frame."—*Civil Service Gazette.*

Made simply with boiling water or milk. Sold only in half-pound tins by Grocers, labeled thus:

JAMES EPPS & CO., Homœopathic Chemists, London, England.



WITHERBY, RUGG & RICHARDSON, Manufacturers of Patent Wood Working Machinery of every description. Facilities unsurpassed. Shop formerly occupied by R. Ball & Co., Worcester, Mass. Send for Catalogue.

SPEAKING TELEPHONES.
THE AMERICAN BELL TELEPHONE COMPANY,
W. H. FORBES, *President.* W. R. DRIVER, *Treasurer.* THEO. N. VAIL, *Gen. Manager.*

Alexander Graham Bell's patent of March 7, 1876, owned by this company, covers every form of apparatus, including Microphones or Carbon Telephones, in which the voice of the speaker causes electric undulations corresponding to the words spoken, and which articulations produce similar articulate sounds at the receiver. The Commissioner of Patents and the U. S. Circuit Court have decided this to be the true meaning of his claim; the validity of the patent has been sustained in the Circuit on final hearing in a contested case, and many injunctions and final decrees have been obtained on them.

This company also owns and controls all the other telephonic inventions of Bell, Edison, Berliner, Gray, Blake, Phelps, Watson, and others.

(Descriptive catalogues forwarded on application.)

Telephones for Private Line, Club, and Social systems can be procured directly or through the authorized agents of the company.

All telephones obtained except from this company, or its authorized licensees, are infringements, and the makers, sellers, and users will be proceeded against

Information furnished upon application.

Address all communications to the
AMERICAN BELL TELEPHONE COMPANY,
95 Milk Street, Boston, Mass.

THE HARDEN STAR HAND GRENADE FIRE EXTINGUISHER

Puts Out Fire Instantly.

See editorial notice in SCIENTIFIC AMERICAN of November 22d, 1884.

Send for circulars. Address

Harden Hand Grenade Fire Extinguisher Co.,
205 Wabash Ave., Chicago.
10 Oliver St., Boston, or
95 West Broadway, New York.

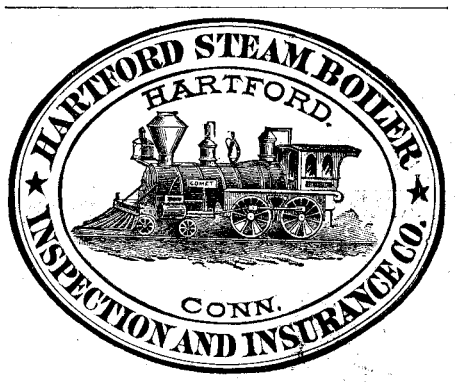

TELEGRAPH.

Instruments, Batteries, Magnets, Wire, Electric Bells, and Electric Apparatus and Supplies of every description. Large Illustrated catalogue mailed free. Manual of Telegraphy with instructions for learners, and for the operation of short lines of Telegraph, free to any address.

J. H. Bunnell & Co., 106 & 108 Liberty St., N.Y.



WOOD, TABER & MORSE,
Eaton, Madison Co., N. Y.,
MANUFACTURERS OF
PORTABLE AND AGRICULTURAL Steam Engines

Of the highest standard, in every respect, of materials and workmanship. Were pioneers in the manufacture of **Practically Portable Steam Engines,** And with determined policy to build only the best machinery from the best materials, and in the best manner of construction, and with continued improvements, have attained the highest standard in excellence of workmanship, simplicity of design, and capacity of power. For a quarter of a century have maintained their manufacture **The Standard Portable and Agricultural Engines** of the world. Descriptive circulars sent on application. Mention this paper.



Curtis Pressure Regulator,
FOR STEAM AND WATER,
Is made entirely of Metal. Occupies the same space as a Globe Valve. It has no glands or packing, and is a lock-up valve.

CURTIS STEAM TRAP
Has main valve *outside* and air valve *inside.*

CURTIS REGULATOR CO.,
54 Beverly St., Boston, Mass.

TELEPHONES.
The United States Telephone Mfg. Co.

This Company is the owner of the patents of James W. McDonough for speaking telephones.

Mr. McDonough's application for patent was the first that was made in the U. S. Patent office for a speaking telephone; all other telephones are an infringement of these patents. This Company also owns patents covering a complete system of telephone exchanges.

All telephones obtained except from this Company or its authorized licensees are infringements, and the makers, sellers, and users will be proceeded against.

This Company are now prepared to sell Telephones of the most improved form.

For particulars apply to

The United States Telephone Manufacturing Co.,
187 BROADWAY N. Y.

The "MONITOR."
A NEW LIFTING AND NON-LIFTING INJECTOR.



Best Boiler Feeder in the world. Greatest Range yet obtained. Does not Break under Sudden Changes of Steam Pressure.

Also Patent
EJECTORS
OR
Water Elevators,
For Conveying Water and Liquid.
Patent Oilers, Lubricators, etc.

NATHAN MANUFACTURING COMPANY,
Send for catalogue. **92 & 94 Liberty St., New York.**

This is the only steam boiler ever devised in strict compliance with the demands of natural laws. It gives complete immunity against explosions, delivers dry steam, prevents all incrustation and deposit on the bottom plates, affords safety with high pressure, and secures great economy. The invention is applicable to every style of boiler, and can be readily applied, internally or externally, to new or old boilers. Licenses granted on liberal terms to manufacturers. Send for description.

LAWSON NON-EXPLOSIVE BOILER CO.,
155 and 157 Broadway, N.Y.

Leffel Water Wheels,



With Important Improvements.
11,000 IN SUCCESSFUL OPERATION.
FINE NEW PAMPHLET FOR 1885
Sent free to those interested.
JAMES LEFFEL & CO.,
Springfield, Ohio.
110 Liberty St., N. Y. City.



The Scientific American.
THE MOST POPULAR SCIENTIFIC PAPER IN THE WORLD.

Published Weekly, $3.20 a Year; $1.60 Six Months.

This unrivaled periodical, now in its **forty-first year,** continues to maintain its high reputation for excellence, and enjoys the largest circulation ever attained by any scientific publication.

Every number contains sixteen large pages, beautifully printed, elegantly illustrated; it presents in popular style a descriptive record of the most novel, interesting, and important advances in Science, Arts, and Manufactures. It shows the progress of the World in respect to New Discoveries and Improvements, embracing Machinery, Mechanical Works, Engineering in all branches, Chemistry, Metallurgy, Electricity, Light, Heat, Architecture, Domestic Economy, Agriculture, Natural History, etc. It abounds with fresh and interesting subjects for discussion, thought, or experiment; furnishes hundreds of useful suggestions for business. It promotes Industry, Progress, Thrift, and Intelligence in every community where it circulates.

The SCIENTIFIC AMERICAN should have a place in every Dwelling, Shop, Office, School, or Library. Workmen, Foremen, Engineers, Superintendents, Directors, Presidents, Officials, Merchants, Farmers, Teachers, Lawyers, Physicians, Clergymen, people in every walk and profession in life, will derive benefit from a regular reading of THE SCIENTIFIC AMERICAN.

Terms for the United States and Canada, $3.20 a year; $1.60 six months. Specimen copies free. Remit by Postal Order or Check.

MUNN & CO., Publishers,
361 Broadway, New York.

THE Scientific American Supplement.

THE SCIENTIFIC AMERICAN SUPPLEMENT is a separate and distinct publication from THE SCIENTIFIC AMERICAN, but is uniform therewith in size, every number containing sixteen large pages. THE SCIENTIFIC AMERICAN SUPPLEMENT is published weekly, and includes a very wide range of contents. It presents the most recent papers by eminent writers in all the principal departments of Science and the Useful Arts, embracing Biology, Geology, Mineralogy, Natural History, Geography, Archæology, Astronomy, Chemistry, Electricity, Light, Heat, Mechanical Engineering, Steam and Railway Engineering, Mining, Ship Building, Marine Engineering, Photography, Technology, Manufacturing Industries, Sanitary Engineering, Agriculture, Horticulture, Domestic Economy, Biography, Medicine, etc. A vast amount of fresh and valuable information pertaining to these and allied subjects is given, the whole profusely illustrated with engravings.

The most important Engineering Works, Mechanisms, and Manufactures at home and abroad are represented and described in the SUPPLEMENT.

Price for the SUPPLEMENT for the United States and Canada, $5.00 a year, or one copy of the SCIENTIFIC AMERICAN and one copy of the SUPPLEMENT, both mailed for one year for $7.00. Address and remit by postal order or check,

MUNN & Co., 361 Broadway, N. Y.,
Publishers SCIENTIFIC AMERICAN.

To Foreign Subscribers.—Under the facilities of the Postal Union, the SCIENTIFIC AMERICAN is now sent by post direct from New York, with regularity, to subscribers in Great Britain, India, Australia, and all other British colonies; to France, Austria, Belgium, Germany, Russia, and all other European States; Japan, Brazil, Mexico, and all States of Central and South America. Terms, when sent to foreign countries, Canada excepted, $4, gold, for SCIENTIFIC AMERICAN, one year; $9, gold, for both SCIENTIFIC AMERICAN and SUPPLEMENT for one year. This includes postage, which we pay. Remit by postal order or draft to order of

MUNN & CO., 361 Broadway, New York.

PRINTING INKS.

THE "Scientific American" is printed with CHAS. ENEU JOHNSON & CO.'S INK. Tenth and Lombard Sts. Phila., and 47 Rose St., opp. Duane St., N. Y

© 1885 SCIENTIFIC AMERICAN, INC